


Rev.	Description	Date
A		03-2019

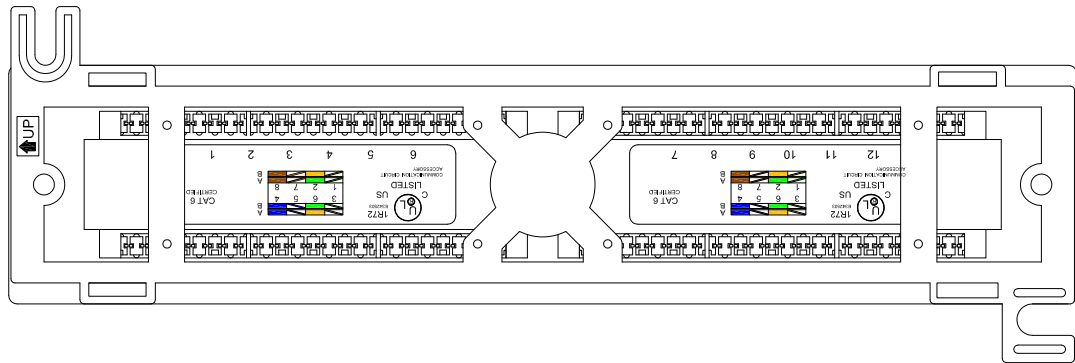

RoHS

Electrical:



1. Current Rating: 1.5AMP
2. Contact Resistance: 100 Milliohms Max
3. Insulation Resistance: 1000 Megohms Min @500V DC
4. Dielectric Strength: 750V AC RMS 60Hz, 1 Min

Environmental:


1. Storage: -40°C to 70°C
 2. Operation: 0°C to 60°C
- Conform to TIA/EIA 568B Category3

Mechanical:

1. Housing Material: PBT+%15 Glass
2. Panel Frame Material: SPCC, Black or Industrial Gray
Electrostatic Powder Coating
3. RJ45 Jack Life: 750 Times Min
4. IDC life: 2000 Times Min
5. Contact Material: Phosphor Bronze Stamp Pin T=0.30mm
6. IDC Contact Material: Phosphor Bronze T=0.05mm(50µm)
Nickel Plating
7. Wire AWG 22~26

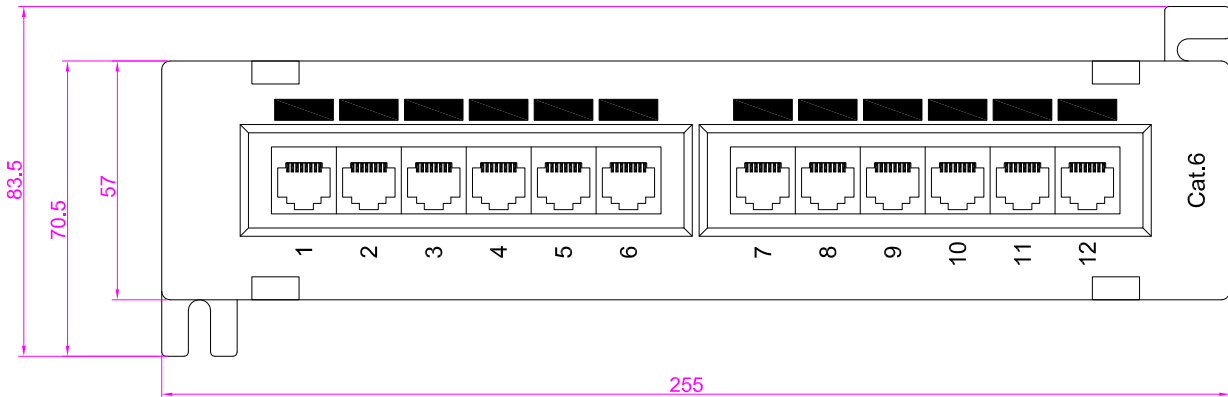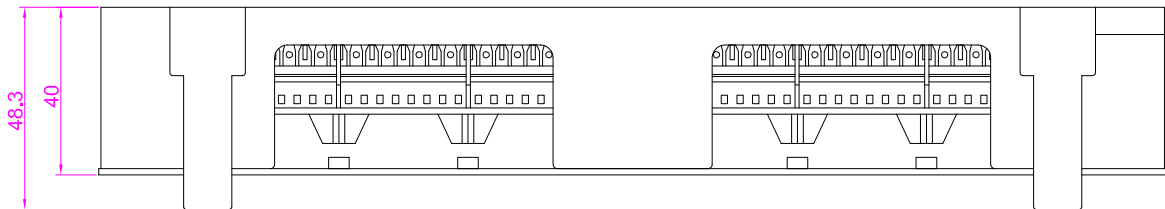

Color coding information

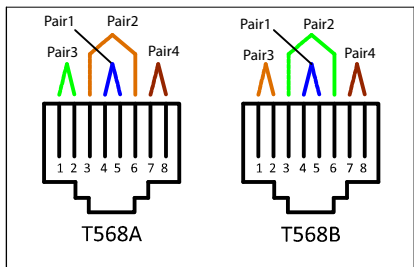

- | | |
|------------------|------------------|
| T568A: | T568B: |
| 1 — White/Green | 1 — White/Orange |
| 2 — Green | 2 — Orange |
| 3 — White/Orange | 3 — White/Green |
| 4 — Blue | 4 — Blue |
| 5 — White/Blue | 5 — White/Blue |
| 6 — Orange | 6 — Green |
| 7 — White/Brown | 7 — White/Brown |
| 8 — Brown | 8 — Brown |

Item Number:	69BK-06012-10	
Title:	Wall Mount 12 Port Cat6 Patch Panel, 110 Type, 568A & 568B Compatible, 10 inch	
Drawn by:	JL	
Approved by:	MAC	
ID:	280	

No.	Specifications
-----	----------------