
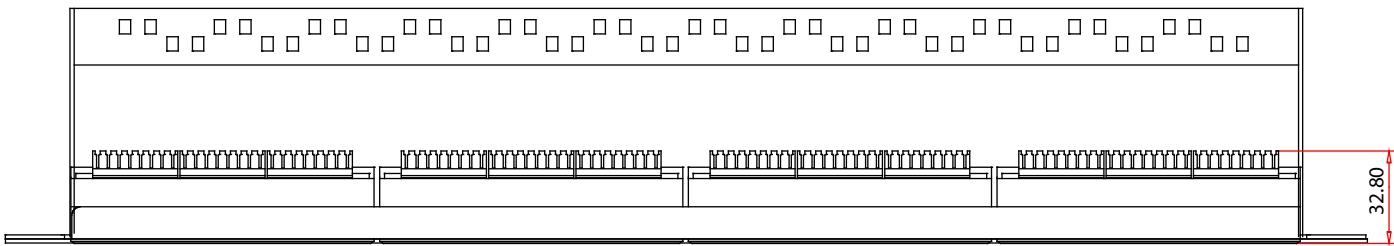


Rev.	Description	Date
A		05-2019

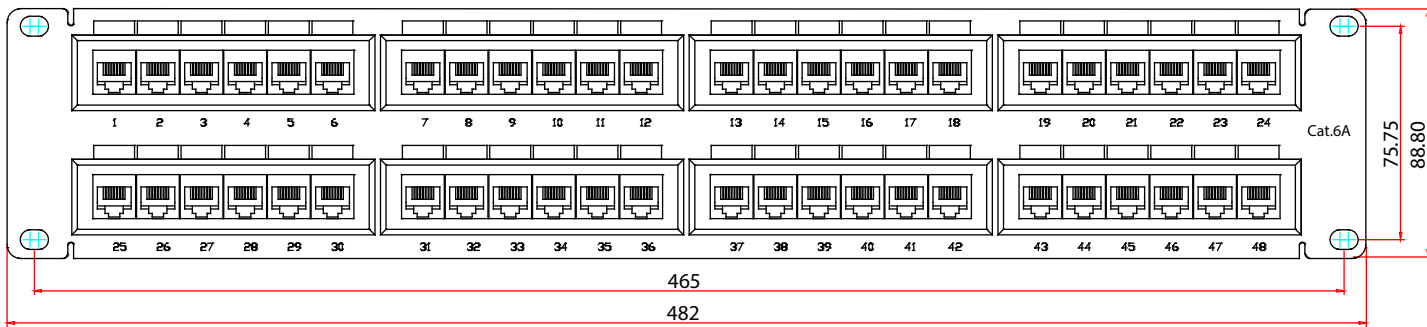


RoHS

- Performance:**
1. The IDC Color Comblne Two Wirings of T568A& 568B
 2. Insertion Force: 900 Grms For 8 Contacts
 - 3.Retention Strength: 7.7 kgs Between Jack and Plug
 4. Operation Temperature: -40 °C to +70 °C
 5. Durability:
 - 5-1. Jack:750 Cycles Plug-Jack Mating and Unmating Test
 - 5-2. IDC: Max 200 Punching Times.

- Material:**
1. Panel: 1.2mm/SPCC with Balck Color Paingting
 2. RJ45 Housing: PC
 3. RJ45 Contact Material & Finished
 - 3-1.Phosphor Bronze with 50-60 Micro-inch Nickel Plated
 - 3-2. Contact Area:3-50 Mico-inch Gold Plated
 4. IDC Housing: PC
 5. IDC Terminal Material & Finished
 - 5-1. Phosphor Bronze with 50 Micro-inch Tin-Lead Plated, Over 50-60 Micro-inch Nickel Plated.
 - 5-2.Use for 22-26 AWG Stranded and Solid Wire
 6. Jack Bracket Set: ABS Black Color
 7. PCB: FR4 UL 94V-0

Color coding information			
T568A		T568B	
1	White/Green	1	White/Orange
2	Green	2	Orange
3	White/Orange	3	White/Green
4	Blue	4	Blue
5	White/Blue	5	White/Blue
6	Orange	6	Green
7	White/Brown	7	White/Brown
8	Brown	8	Brown

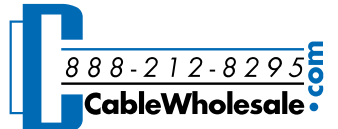Item Number:	69BK-16048	
Title:	19" UTP Cat.6A Patch Panel, 48Ports, 110 IDC	
Drawn by:	JL	
Approved by:	MAC	
ID:	280	

No.	Specifications
-----	----------------