



6AS7-GA

TWIN TRIODE

DESCRIPTION AND RATING

The 6AS7-GA is a low-mu twin triode designed primarily for service as a series regulator tube in d-c power supplies. Except for the use of a T-12 envelope, the 6AS7-GA is identical to the 6AS7-G.

GENERAL


ELECTRICAL

Cathode—Coated Unipotential	
Heater Voltage, AC or DC	6.3 Volts
Heater Current	2.5 Amperes
Direct Interelectrode Capacitances, approximate*	
Grid to Plate, Each Section	7.5 $\mu\mu\text{f}$
Input, Each Section	6.5 $\mu\mu\text{f}$
Output, Each Section	2.2 $\mu\mu\text{f}$
Heater to Cathode, Each Section	7.0 $\mu\mu\text{f}$
Grid to Grid	0.5 $\mu\mu\text{f}$
Plate to Plate	1.9 $\mu\mu\text{f}$

MECHANICAL

Mounting Position—Any
 Envelope—T-12, Glass
 Base—B8-110, Short Medium-Shell Octal 8-Pin

BASING DIAGRAM




RETMA 8BD

TERMINAL CONNECTIONS

- Pin 1—Grid (Section 2)
- Pin 2—Plate (Section 2)
- Pin 3—Cathode (Section 2)
- Pin 4—Grid (Section 1)
- Pin 5—Plate (Section 1)
- Pin 6—Cathode (Section 1)
- Pin 7—Heater
- Pin 8—Heater

PHYSICAL DIMENSIONS

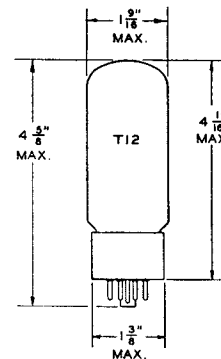

MAXIMUM RATINGS**DC AMPLIFIER SERVICE
DESIGN-CENTER VALUES, EACH SECTION**

Plate Voltage250	Volts
Plate Dissipation13	Watts
Plate Current125	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode300	Volts
Heater Negative with Respect to Cathode300	Volts
Grid-Circuit Resistance		
With Cathode-Bias†	1.0	Megohm

**BOOSTER SCANNING SERVICE‡
DESIGN-CENTER VALUES, EACH SECTION**

Peak Inverse Plate Voltage	1700	Volts
Plate Dissipation13	Watts
Plate Current125	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode300	Volts
Heater Negative with Respect to Cathode300	Volts
Grid-Circuit Resistance		
With Cathode-Bias†	1.0	Megohm

CHARACTERISTICS AND TYPICAL OPERATION**AVERAGE CHARACTERISTICS, EACH SECTION**

Plate Voltage135	Volts
Cathode-Bias Resistor250	Ohms
Amplification Factor20	
Plate Resistance, approximate280	Ohms
Transconductance7000	Micromhos
Plate Current125	Milliamperes


* Without external shield.

† Operation with fixed bias is not recommended.

‡ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

AVERAGE PLATE CHARACTERISTICS

EACH SECTION

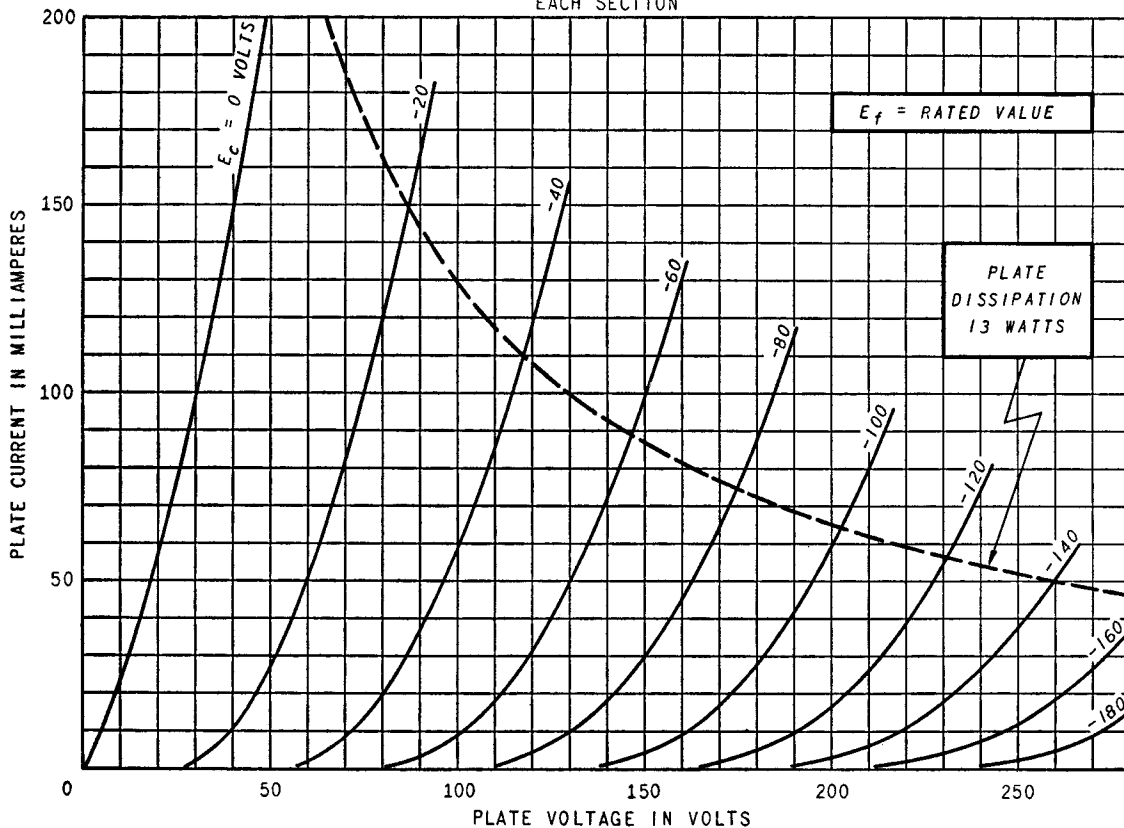

AVERAGE TRANSFER CHARACTERISTICS

EACH SECTION

