

MECHANICAL DATA

Bulb	T-6½
Base	E9-1, Small Button 9-Pin
Outline	6-3
Basing	9CK
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

	6CM6	12CM6
Heater Voltage	6.3	12.6 Volts
Heater Current	450	225 Ma
Heater-Cathode Voltage (Design Center Values)		
Heater Negative with Respect to Cathode		
Total DC and Peak	200	200 Volts Max.
Heater Positive with Respect to Cathode		
DC	100	100 Volts Max.
Total DC and Peak	200	200 Volts Max.

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid to Plate: (g1 to p)	0.7 μf
Input: g1 to (h+k+g2+g3)	8.0 μf
Output: p to (h+k+g2+g3)	8.5 μf

RATINGS (Design Center Values — Except as Noted)

Class A₁ Amplifier



Plate Voltage	315 Volts Max.
Plate Dissipation	12 Watts Max.
Grid No. 2 Voltage	285 Volts Max.
Grid No. 2 Dissipation	2 Watts Max.
Grid No. 1 Circuit Resistance	
Fixed Bias	0.1 Megohm Max.
Cathode Bias	0.5 Megohm Max.

Vertical Deflection Amplifier¹

	Pentode Connected	Triode Connected
Plate Voltage	315	315 Volts Max.
Peak Positive Plate Voltage	2000	2000 Volts Abs. Max.
Plate Dissipation ²	8	8 Watts Max.
Grid No. 2 Voltage	285	Volts
Grid No. 2 Dissipation ²	1.75	Watts
Peak Negative Grid Voltage	250	250 Volts Max.
Average Cathode Current	40	40 Ma Max.
Peak Cathode Current	120	120 Ma Max.
Grid No. 1 Circuit Resistance		
Cathode Bias	2.2	2.2 Megohms Max.

QUICK REFERENCE DATA

The Sylvania Types 6CM6 and 12CM6 are miniature beam power pentodes designed for service as general purpose audio power amplifiers or vertical deflection amplifiers in television receiver sweep circuits. Except for bulb size and/or heater characteristics they are identical to the 6V6GT.

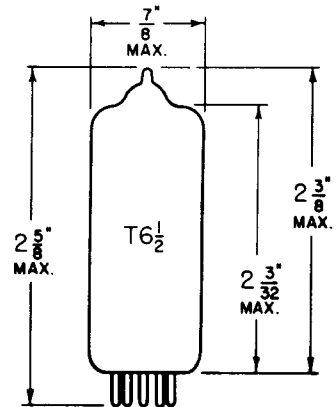

SYLVANIA ELECTRIC PRODUCTS INC.

**RADIO TUBE DIVISION
EMPORIUM, PA.**

*Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA*

JANUARY 1956

PAGE 1 OF 9

CHARACTERISTICS AND TYPICAL OPERATION

Class A₁ Amplifier (Single Tube)

Conditions:

Plate Voltage	180	250	315 Volts
Grid No. 2 Voltage	180	250	225 Volts
Grid No. 1 Voltage	-8.5	-12.5	-13.0 Volts
Peak A F Grid No. 1 Voltage	8.5	12.5	13.0 Volts
Zero Signal Plate Current	29	45	34 Ma
Maximum Signal Plate Current	30	47	35 Ma
Zero Signal Grid No. 2 Current	3.0	4.5	2.2 Ma
Maximum Signal Grid No. 2 Current	4.0	7.0	6.0 Ma
Plate Resistance (approx.)	50,000	50,000	80,000 Ohms
Transconductance	3,700	4,100	3,750 μ mhos
Load Resistance	5,500	5,000	8,500 Ohms
Maximum Signal Power Output	2.0	4.5	5.5 Watts
Total Harmonic Distortion	8	8	12 Percent

Class A₁ Push-Pull Amplifier (Values are for Two Tubes)

Conditions:

Plate Voltage	250	285 Volts
Grid No. 2 Voltage	250	285 Volts
Grid No. 1 Voltage	-15	-19 Volts
Peak A F Grid No. 1 to Grid No. 1 Voltage	30	38 Volts
Zero Signal Plate Current	70	70 Ma
Maximum Signal Plate Current	79	92 Ma
Zero Signal Grid No. 2 Current	5	4 Ma
Maximum Signal Grid No. 2 Current	13	13.5 Ma
Plate-to-Plate Load Resistance	10,000	8,000 Ohms
Maximum Signal Power Output	10	14 Watts
Total Harmonic Distortion	5	3.5 Percent


Vertical Deflection Amplifier

	Pentode Connected	Triode Connected
Plate Voltage	250	250 Volts
Grid No. 2 Voltage	250	Volts
Grid No. 1 Voltage	-12.5	-12.5 Volts
Plate Current	45	49.5 Ma
Grid No. 2 Current	4.5	Ma
Transconductance	4,100	5,000 μ mhos
Amplification Factor		9.8
Plate Resistance (approx.)	50,000	1,960 Ohms
Grid No. 1 Voltage (approx.) for I _b = 0.5 Ma	-37	-37 Volts

NOTES:


1. For operating in 525 line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations, Federal Communications Commission". The duty cycle of the voltage pulse is not to exceed 15% of a scanning cycle.
2. In stages operating with a grid-leak bias, an adequate cathode bias resistor, or other suitable means, is required to protect the tube in the absence of excitation.

AVERAGE PLATE CHARACTERISTICS

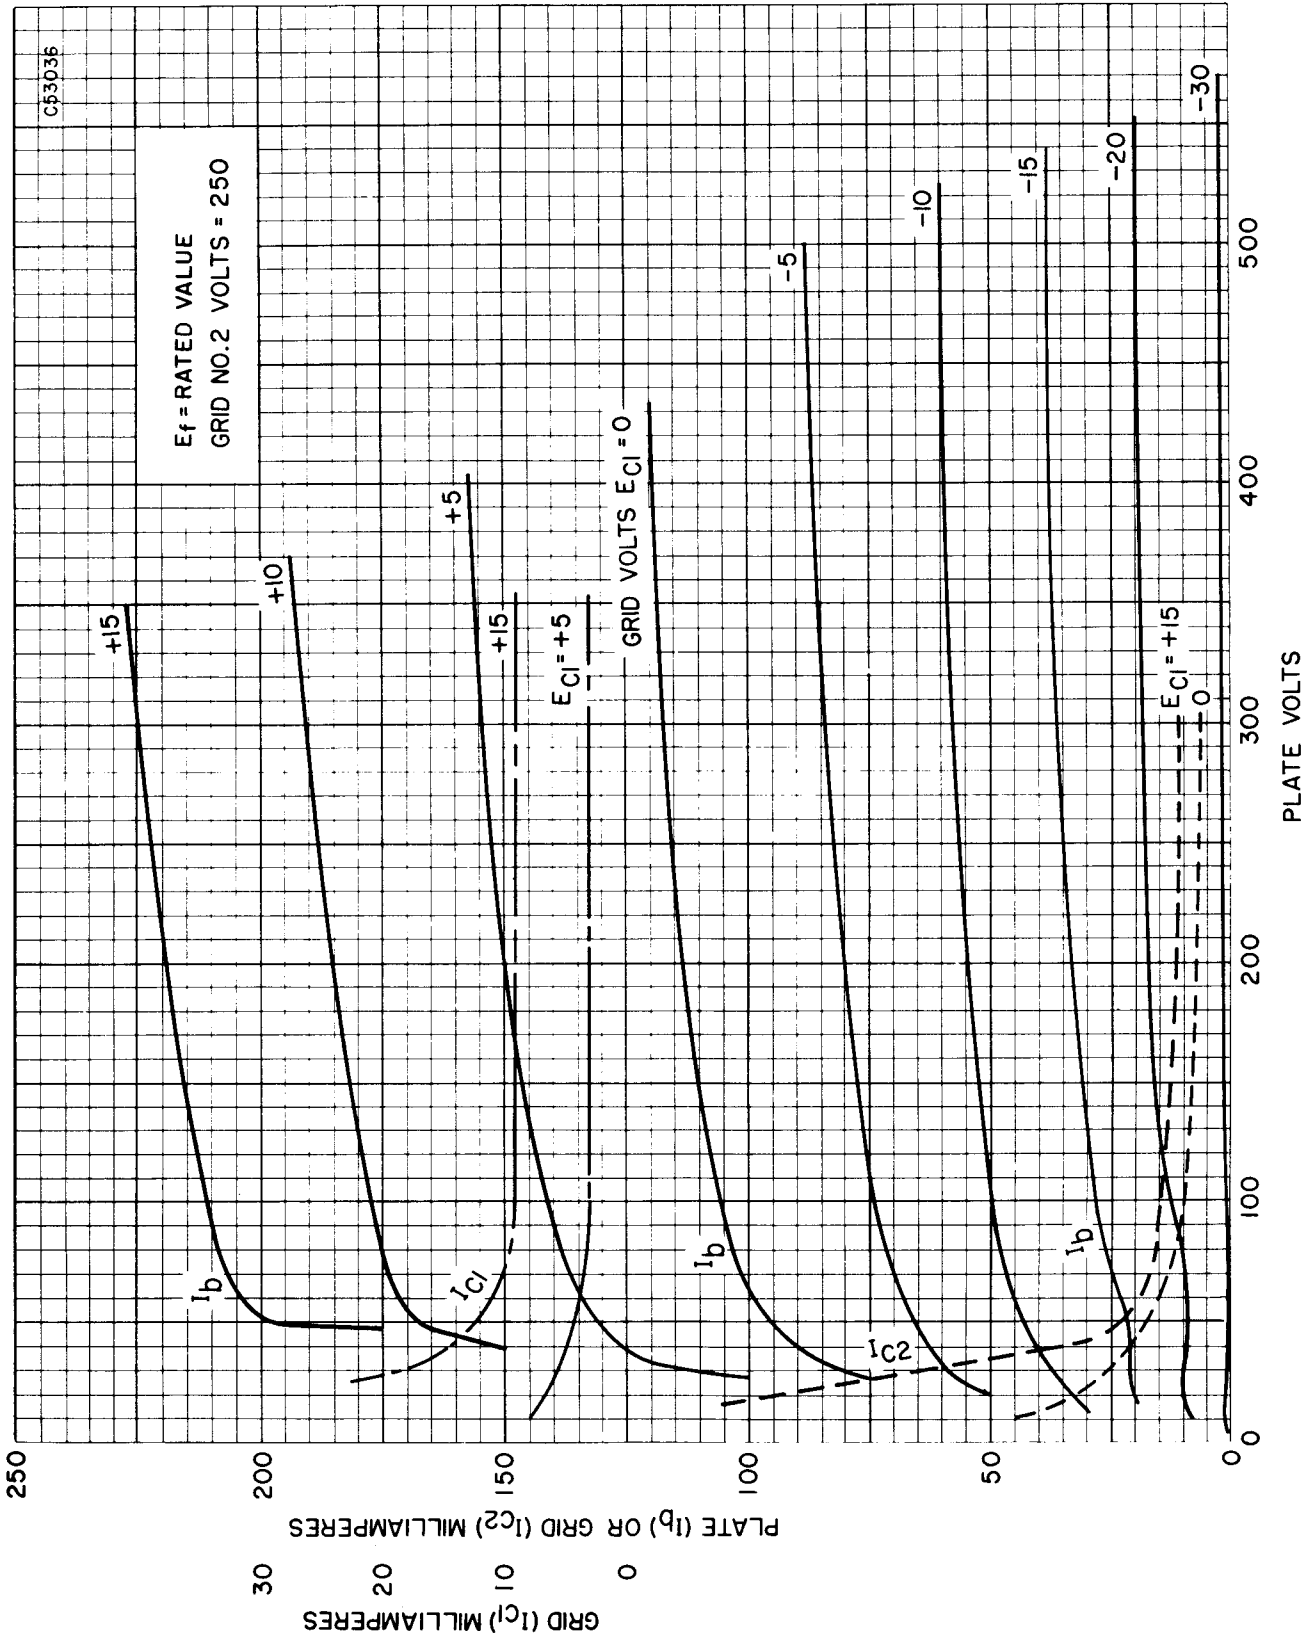


C53035

AVERAGE PLATE CHARACTERISTICS

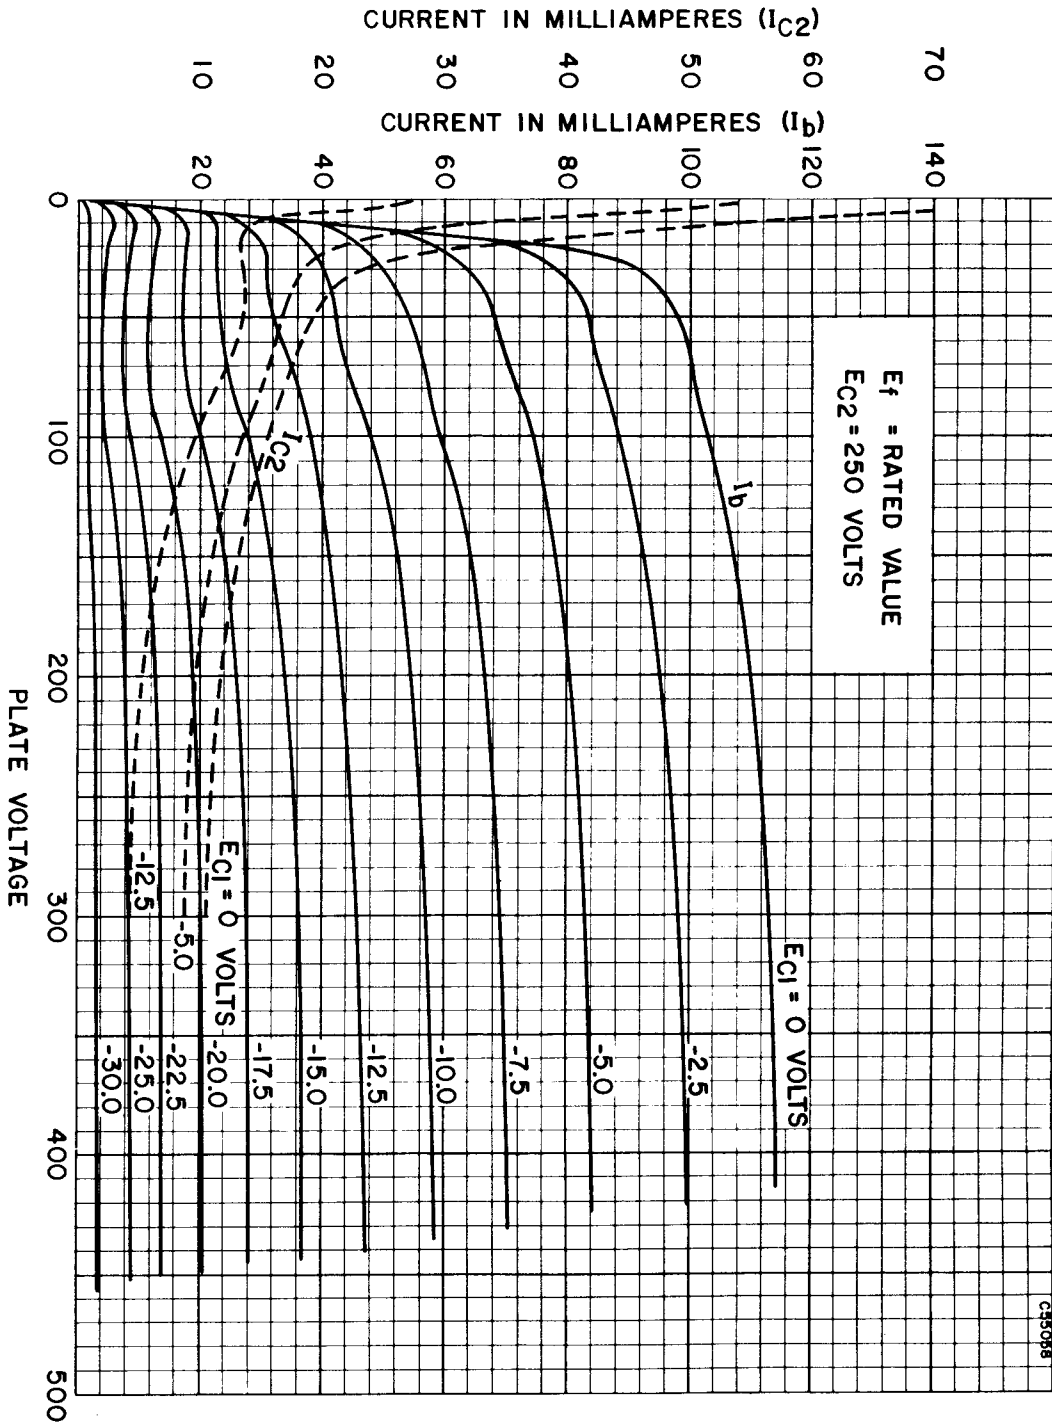


63508B


AVERAGE PLATE CHARACTERISTICS

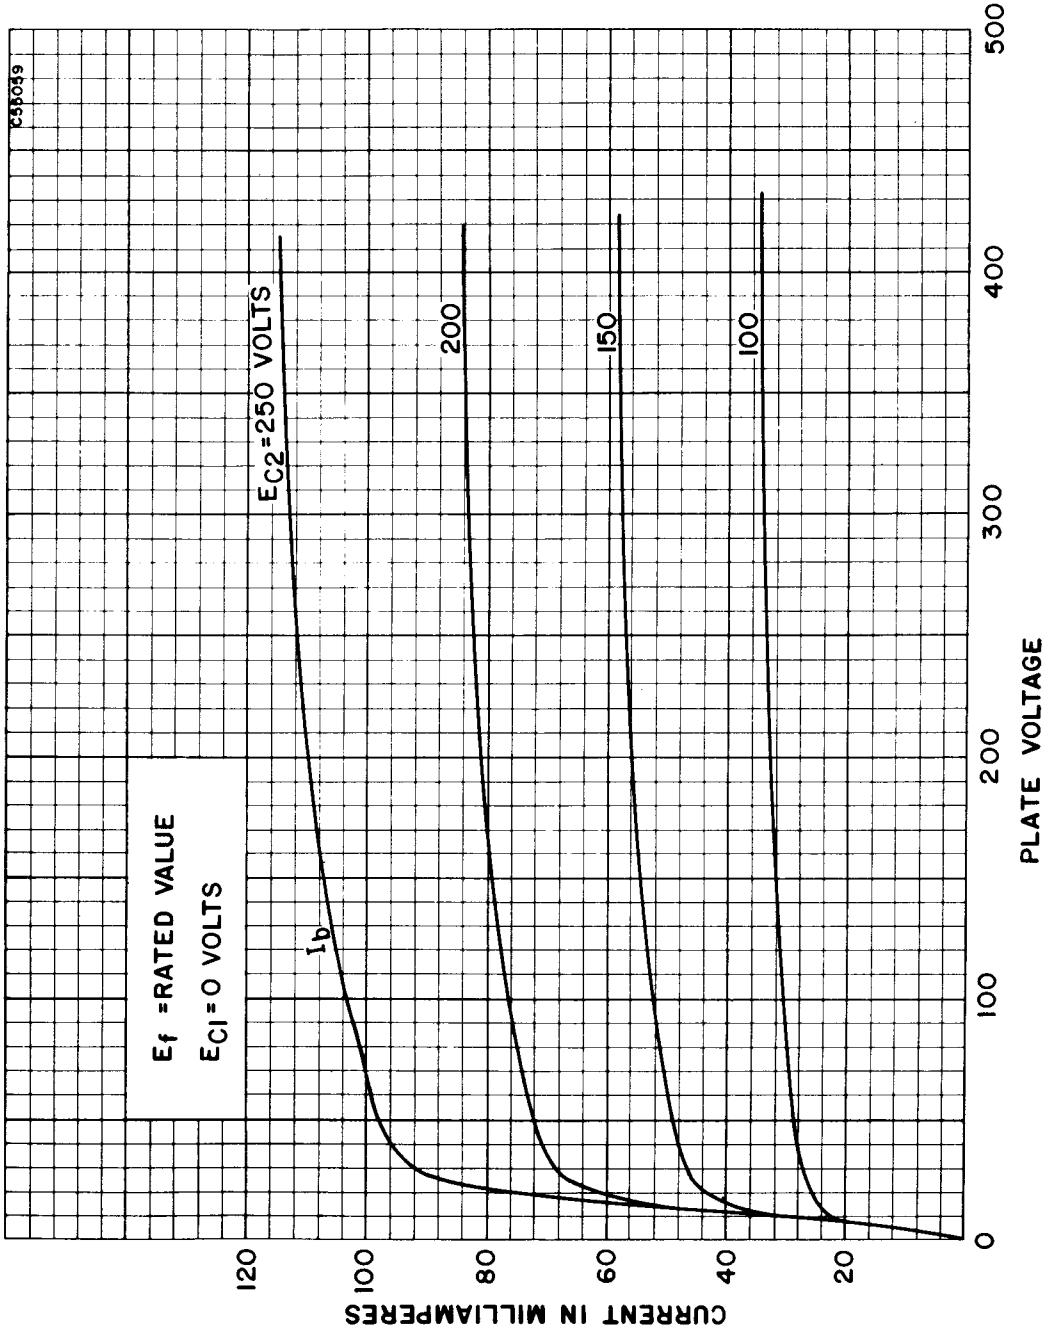


AVERAGE PLATE CHARACTERISTICS
(TRIODE CONNECTED)

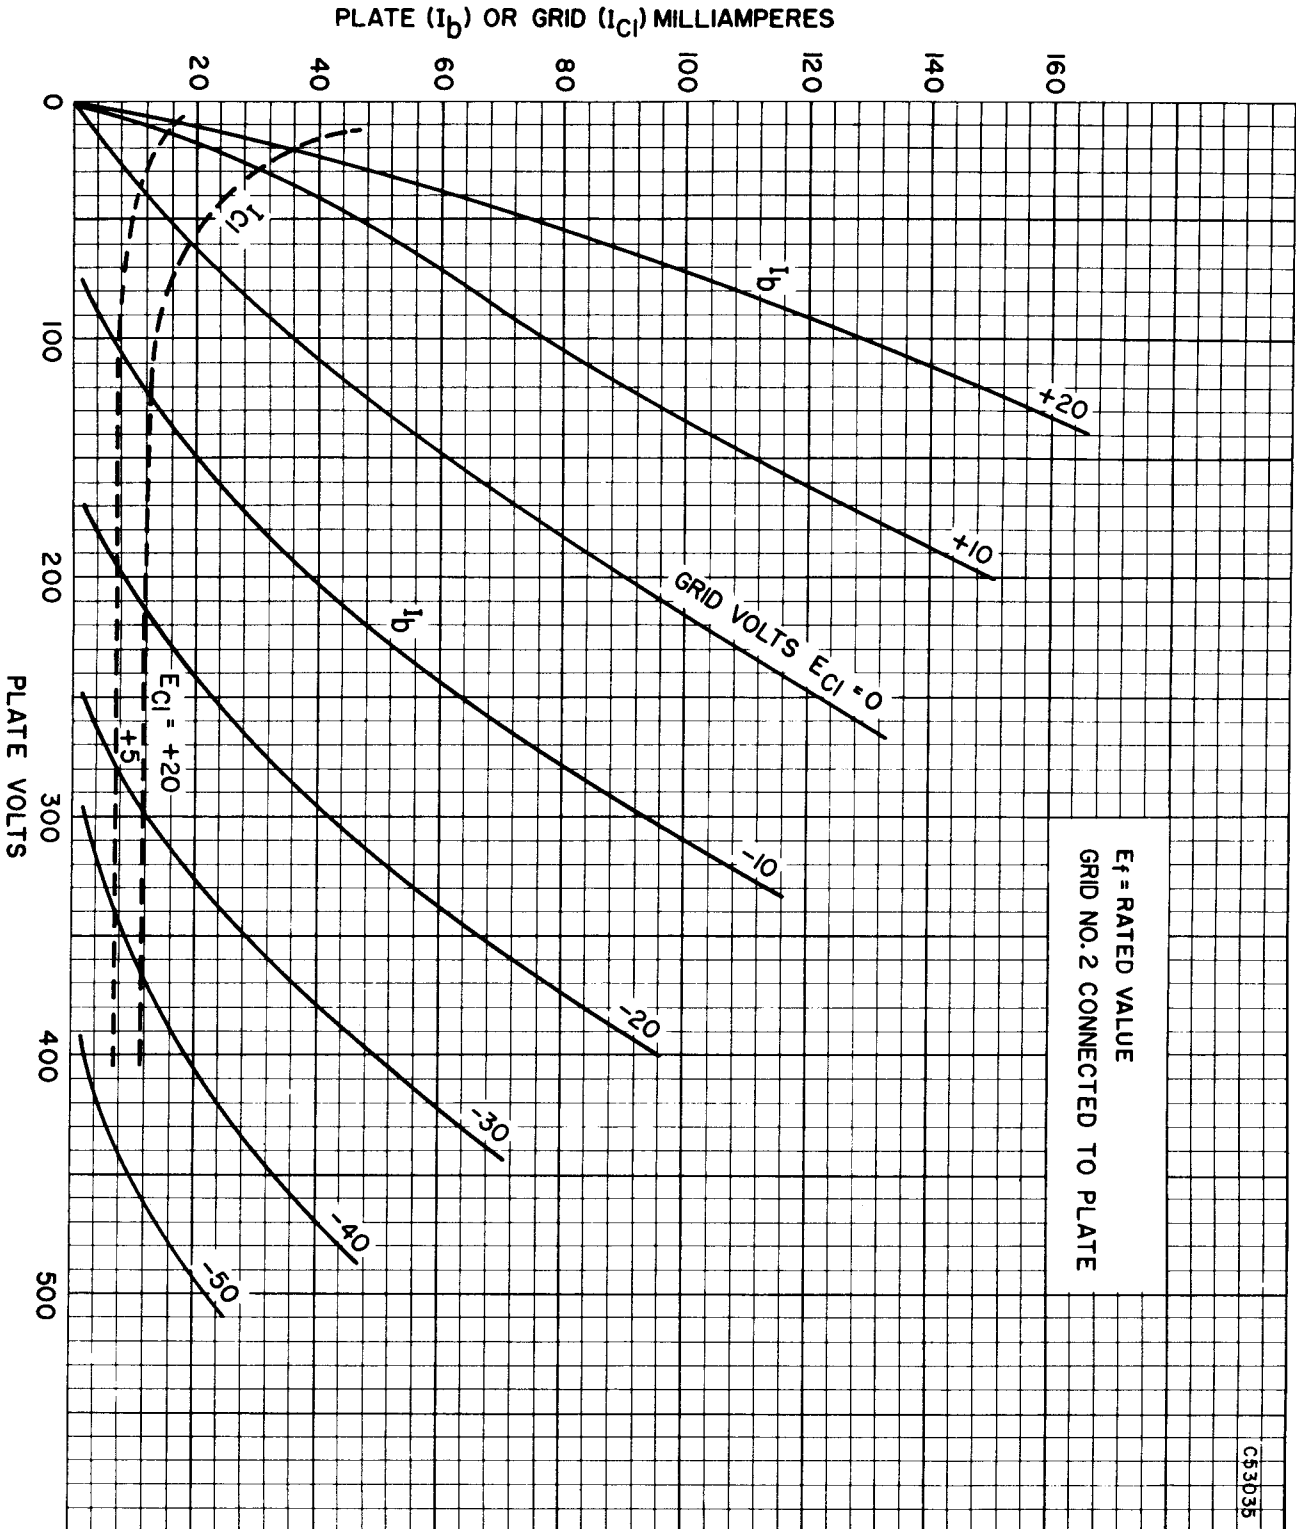

AVERAGE TRANSFER CHARACTERISTICS

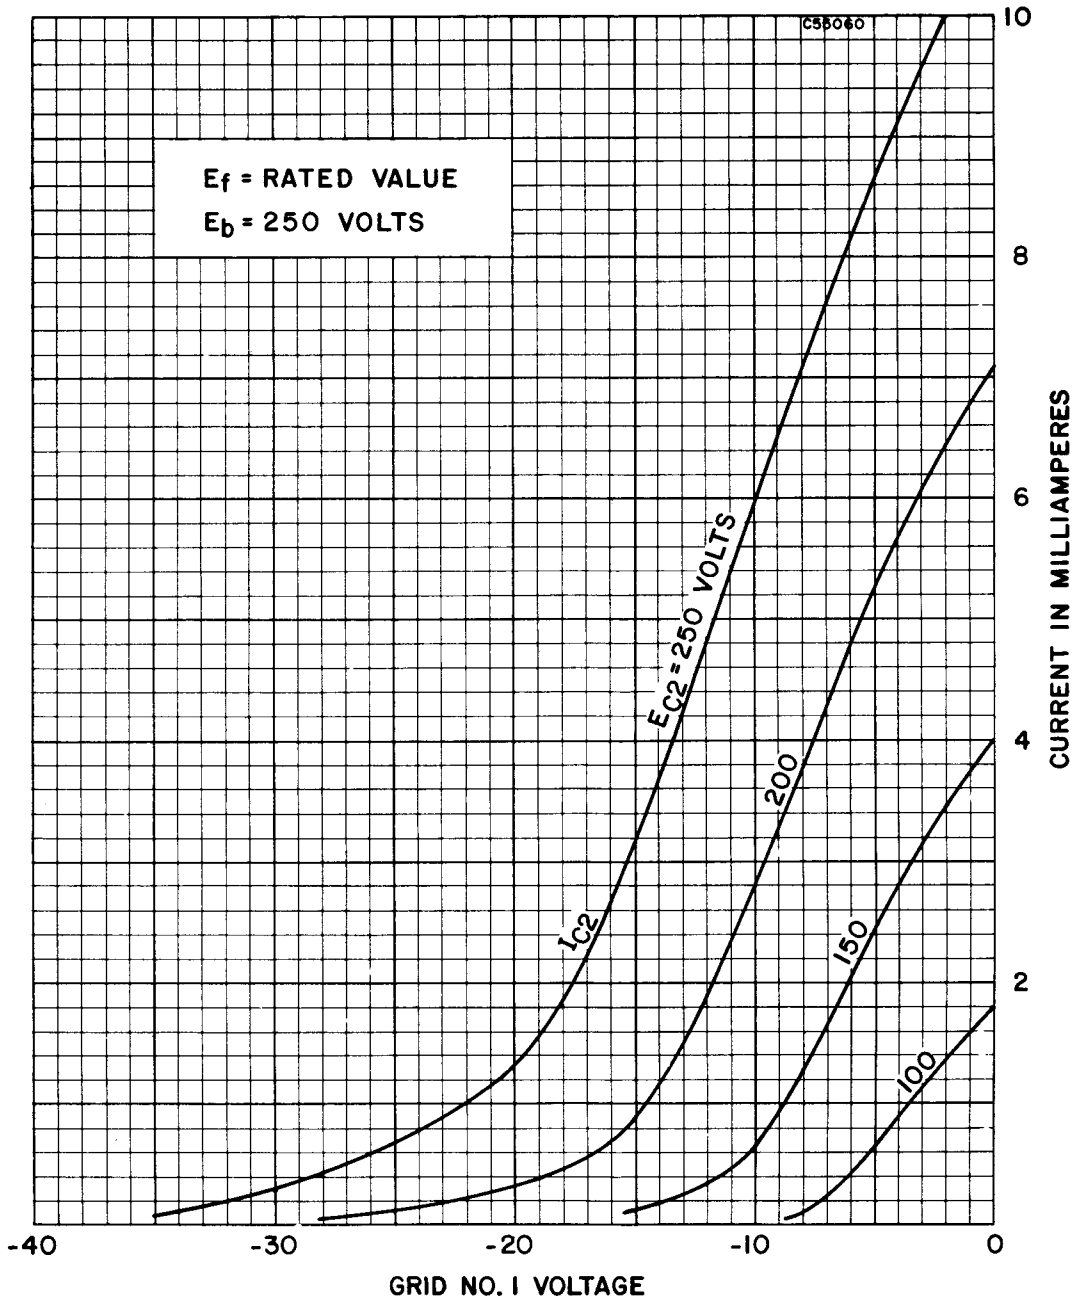

AVERAGE TRANSFER CHARACTERISTICS

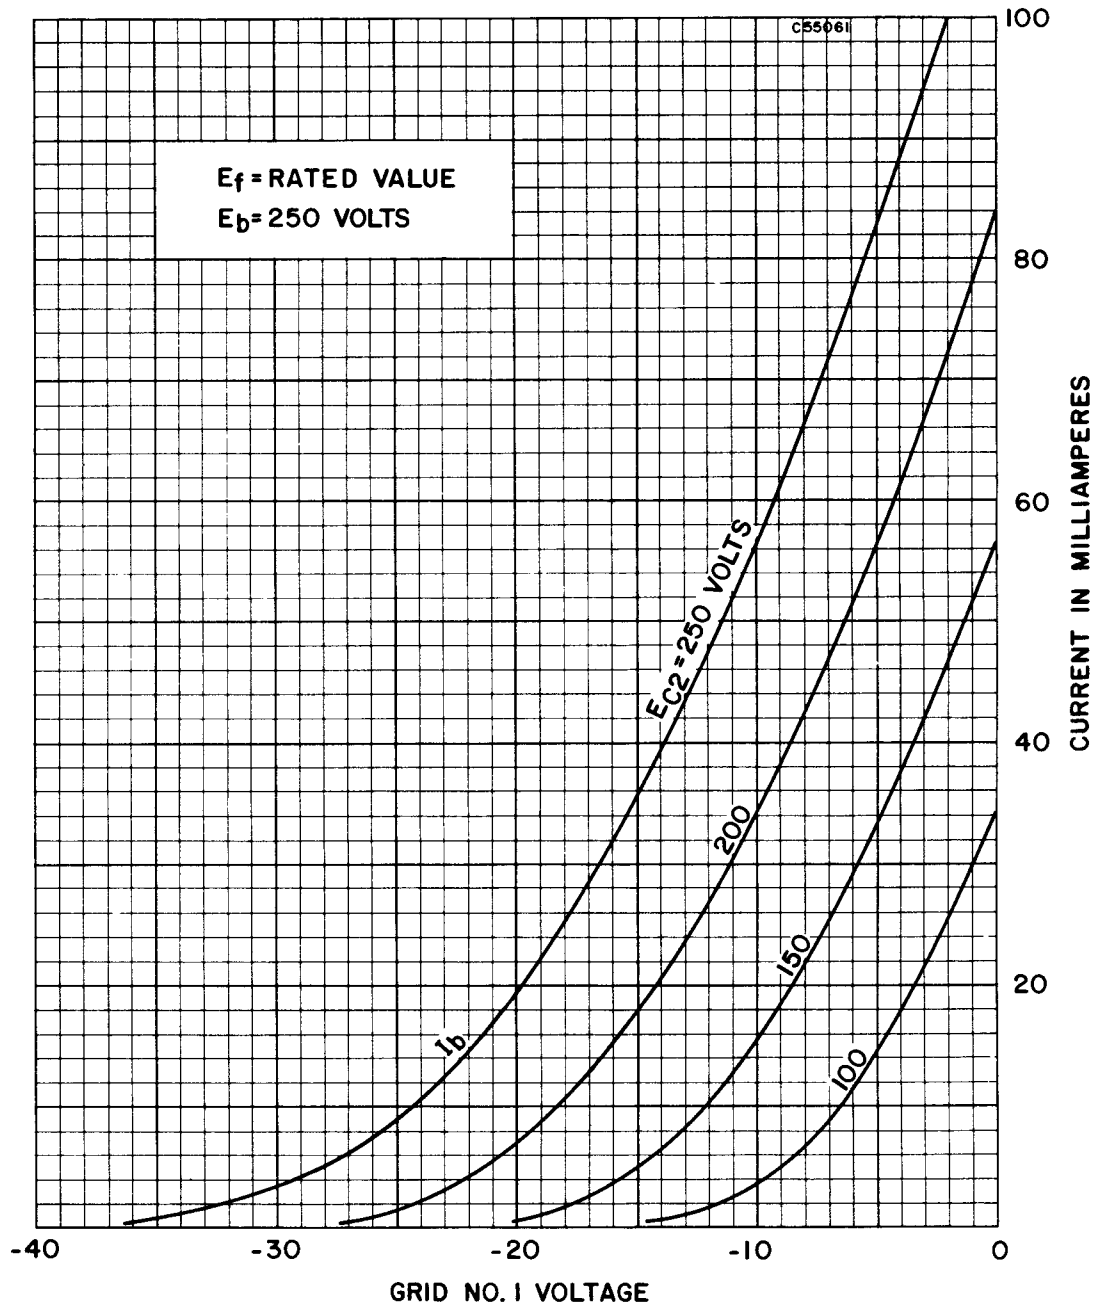

OPERATION CHARACTERISTICS

