
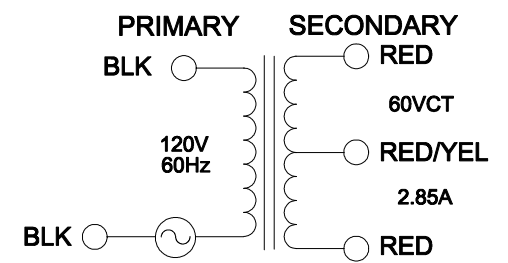


DIMENSIONS:	
A	2.813" ±0.063
B	3.500" MAX.
C	3.375" ±0.063
D	2.125" ±0.063
E	2.250" ±0.063
F	2.813" ±0.063
G	0.375" ±0.125

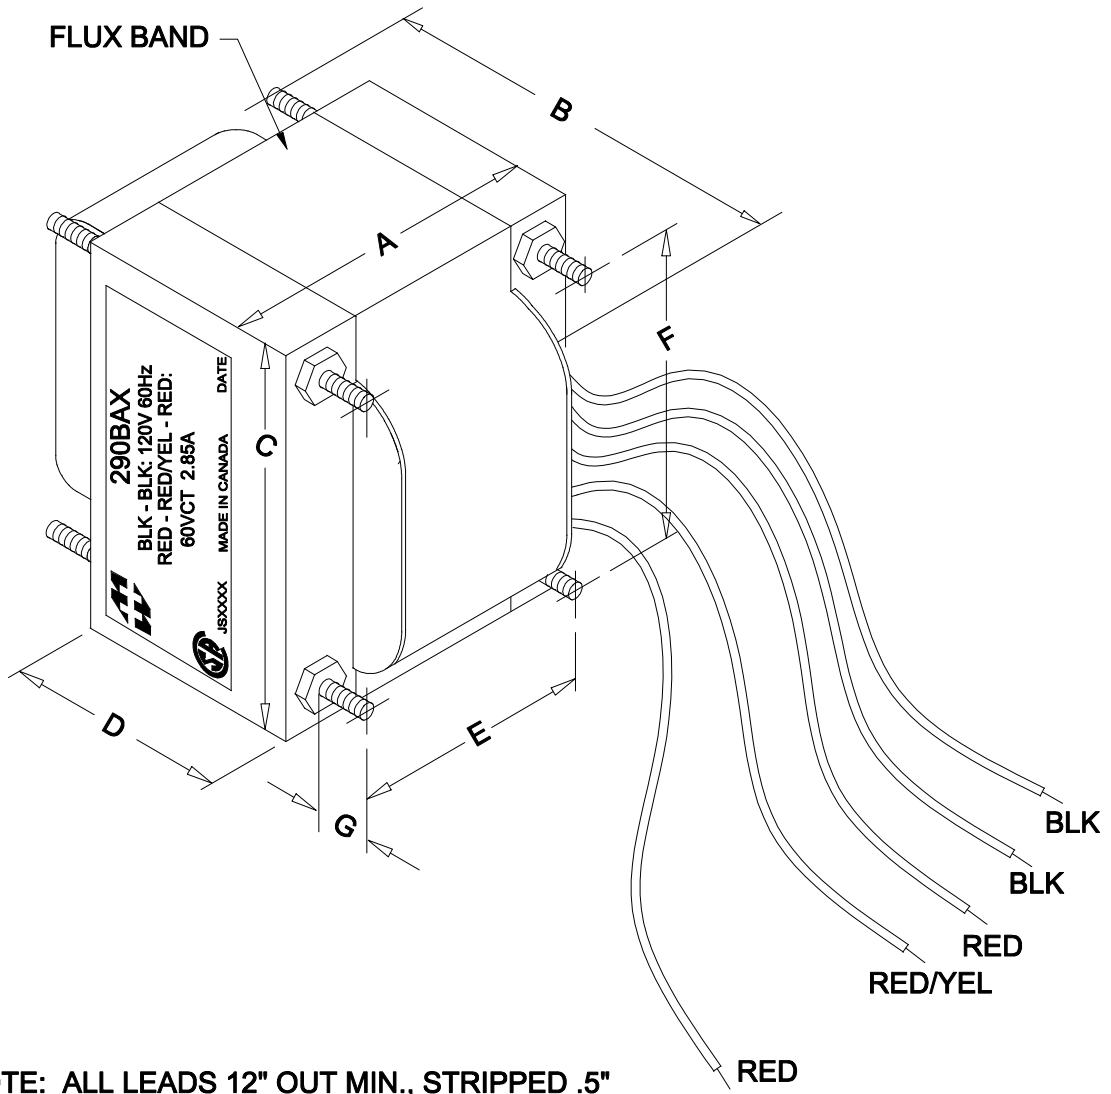

NOTE: ALL LEADS 12" OUT MIN., STRIPPED .5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 120V, 60Hz, BLK - BLK	370mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	RED - RED/YEL = RED/YEL - RED =	31.66V ±2%
	RED - RED =	63.32V ±2%
DCR	@ 20°C, BLK - BLK =	1.447 Ω ±20%
	@ 20°C, RED - RED =	0.448 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED.	C.I. 05/21/19

**HAMMOND ELECTRONIC DIVISION**  
**MANUFACTURING** 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5  
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290BAX
DATE: 05/21/19	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		