



290DHX

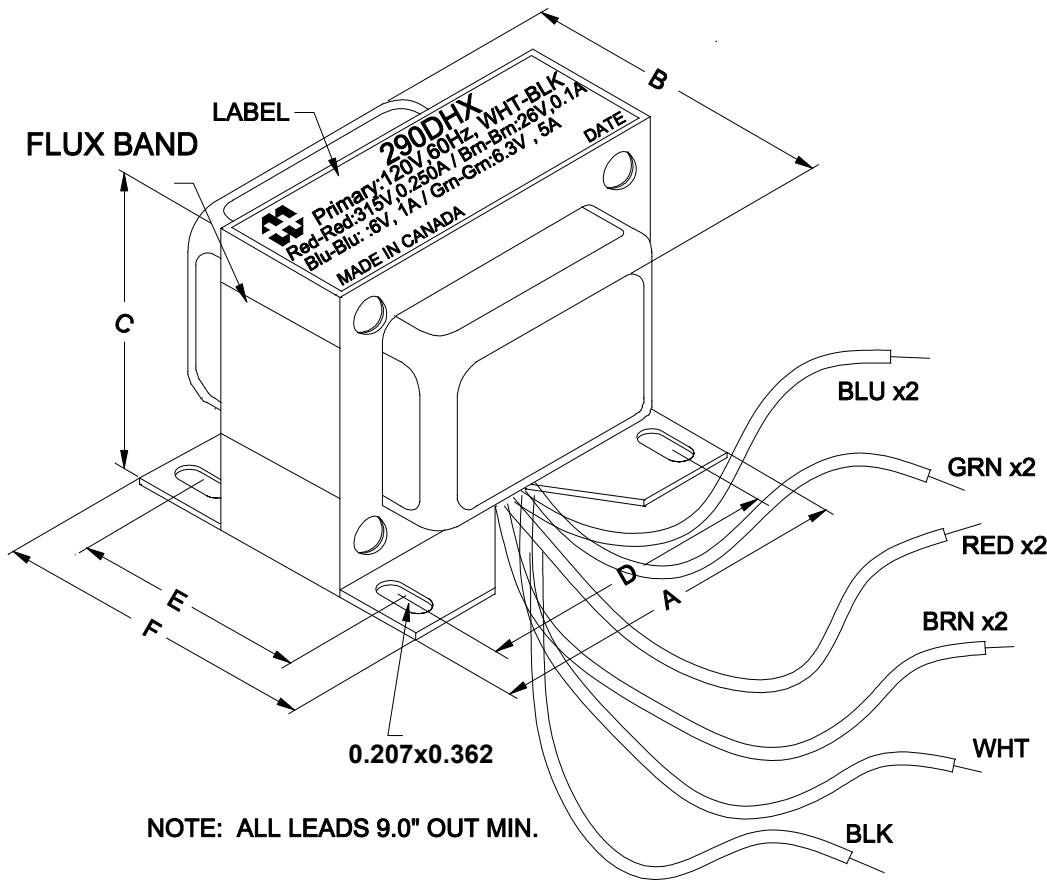

NOTE: ALL LEADS 9.0" OUT MIN.

NOTE: ALL LEADS 9" OUT MIN., STRIPPED .5"

PRIMARY SECONDARY

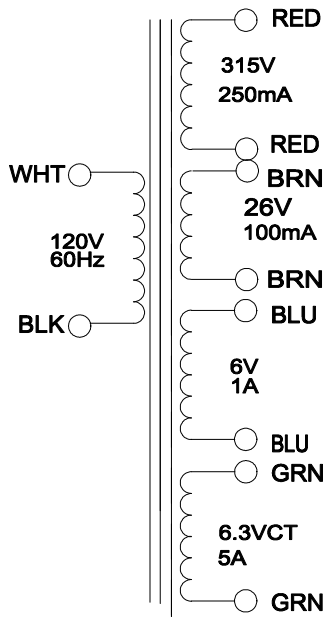

DIMENSIONS:

A	3.750" ±0.063
B	3.450" ±0.125
C	3.150" ±0.063
D	3.250" ±0.063
E	3.000" ±0.063
F	2.370" ±0.063

ELECTRICAL DATA:

Turns ratio:	1 : 2.856 (RED - RED)	
Exciting Current	@ 120V, 60Hz, WHT - BLK = 200mA	Max.
DCR	@ 20C, WHT - BLK = 2.778 Ω	±20%
	@ 20C, RED - RED = 142.4 Ω	±20%
	@ 20C, BLU - BLU = 0.071 Ω	±20%
	@ 20C, GRN - GRN = 0.058 Ω	±20%
Pri. Voltage	120V 50Hz	
Sec. Voltage (RMS)	315V @ 250mA , 26V @ 100mA, 6V @ 1A / 6.3V @ 5A	
No Load Voltage	326.5V/ 29.18V / 6.81V/7.09V	



52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.
PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE		290DHX	
		DR BY	D.Hutt
		DATE	07/07/19
NO	DATE	REVISION	DIM IN(X)MM()

290DHX