
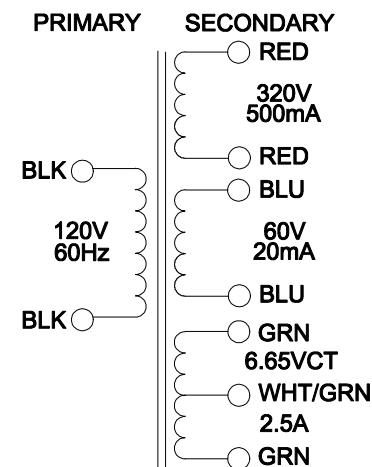


DIMENSIONS:	
A	3.125" ±0.063
B	4.436" ±0.125
C	3.796" ±0.063
D	2.500" ±0.063
E	3.188" ±0.063
G	0.203" X 0.400" ±0.015

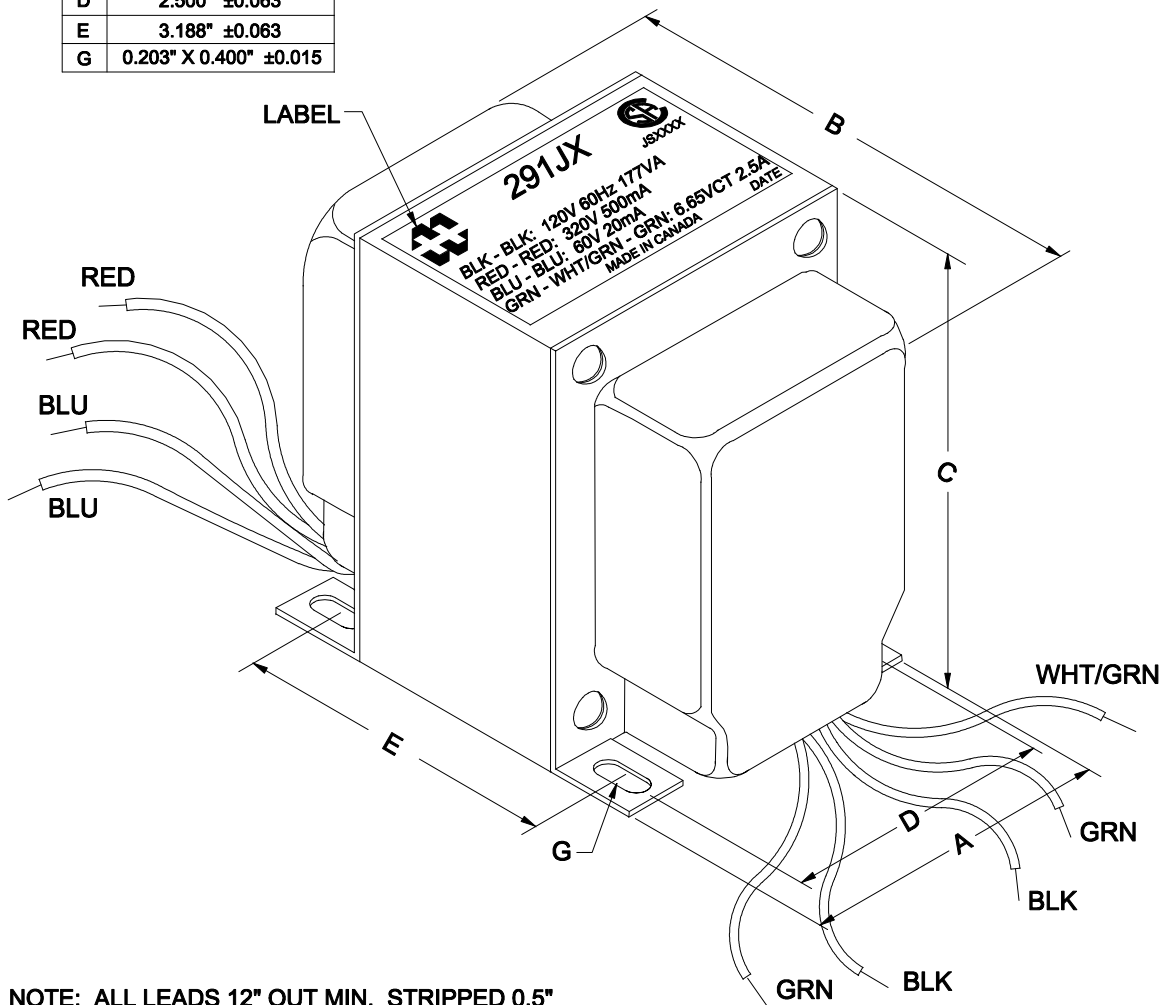

NOTE: ALL LEADS 12" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 120V, 60Hz, BLK - BLK	370mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	RED - RED =	331.7V ±2%
	BLU - BLU =	62.31V ±2%
	GRN - WHT/GRN = WHT/GRN - GRN =	3.462V ±2%
	GRN - GRN =	6.923V ±2%
DCR	@ 20°C, BLK - BLK =	1.443 Ω ±20%
	@ 20°C, RED - RED =	11.76 Ω ±20%
	@ 20°C, BLU - BLU =	9.421 Ω ±20%
	@ 20°C, GRN - GRN =	0.052 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED.	C.I. 09/23/19



ELECTRONIC DIVISION
 52 RANKIN PLACE,
 WATERLOO, ONTARIO, N2J 3Z5

PH # (519) 886-6181
 FAX # (519) 886-9540

DWG. BY: C. ILIE
 DATE: 09/23/19
 CHK'D BY:
 APP'D. BY:
 DIMENSIONS: IN(X) MM()

TITLE: POWER TRANSFORMER

DWG. NO. 291JX