



DIMENSIONS:

A	3.125" ±0.063
B	3.936" ±0.125
C	3.800" ±0.063
D	2.500" ±0.063
E	2.688" ±0.063
G	0.203" x 0.400" ±0.015

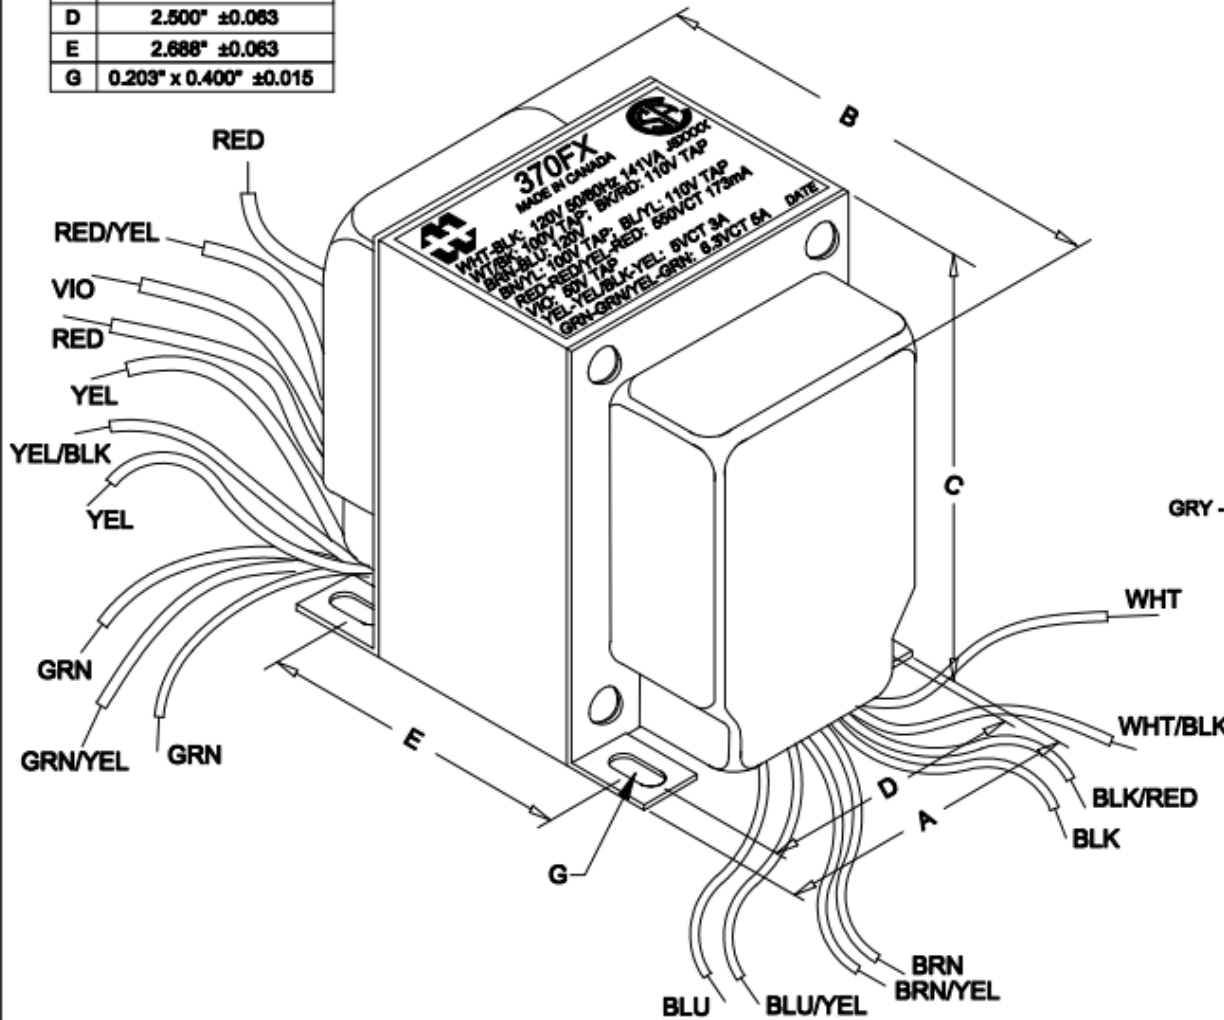

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5

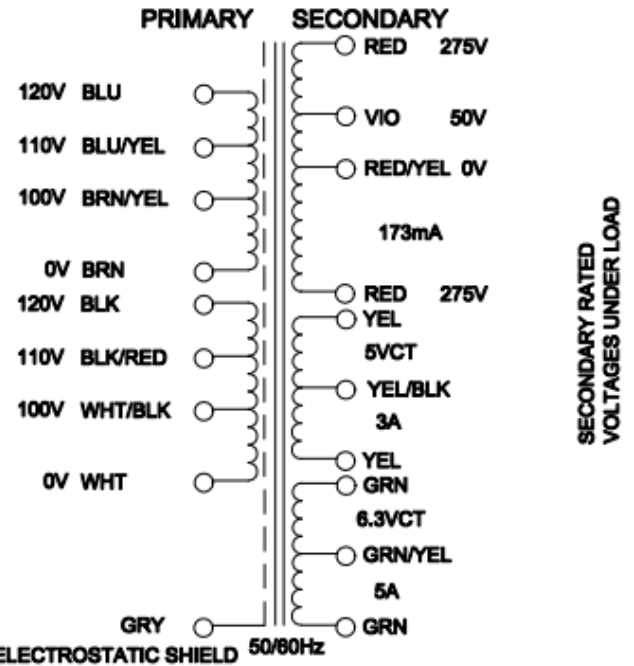

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, WHT - BLK	132mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	RED - RED =	588.3V	±2%
	RED - RED/YEL = RED/YEL - RED =	293.2V	±2%
	RED/YEL - VIO =	50.13V	±2%
	YEL - YEL =	5.316V	±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.858V	±2%
	GRN - GRN =	6.835V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.418V	±2%
DCR	@ 20°C, WHT - BLK =	4.541 Ω	±20%
	@ 20°C, BRN - BLU =	4.902 Ω	±20%
	@ 20°C, RED - RED =	106.0 Ω	±20%
	@ 20°C, YEL - YEL =	0.063 Ω	±20%
	@ 20°C, GRN - GRN =	0.053 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	