


# BASKETBALL ACCESSORIES AUT-O-LOC 2™ SAFETY STRAP


AUT-O-LOC 2 SAFETY STRAPS ARE RECOMMENDED ON ALL FOLDING BACKSTOPS.



Beam Mount

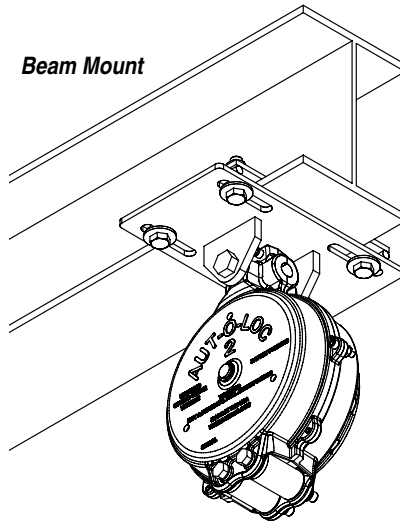

Tube Mount

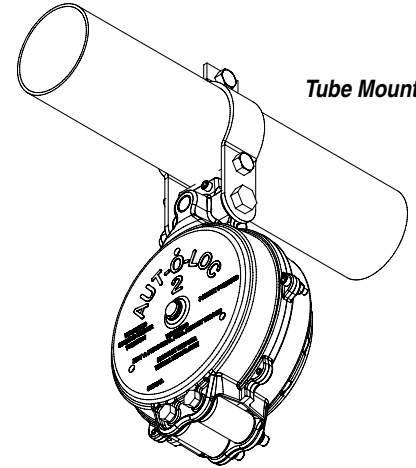

- Actuated by speed or inertia, Aut-O-Loc 2™ Backstop Safety Strap engages instantly to stop a load from falling due to cable breakage, cable clamp failure, or any increase in speed due to failure or back drive of a winch or supporting structure. Unit operates at a sound level less than 20db. This allows the operator to clearly hear the operational sounds of the winch and backstop. Winch may be stopped if there are abnormal audible warnings to indicate possible mechanical issues.

## FEATURES:

- Tear tab deploys a warning flag if unit catches a load to allow user to visually see they need to perform maintenance.
- Aut-O-Loc 2™ is permanently locked when a load of more than 1,000 lb (454 kg) of force is captured, to prevent possible reuse and failure of critical components.

## OPTIONS:

- 503229:** with 36" (91.44 cm) belt.
- 503230:** With 46" (116.84 cm) belt.

## SUPPORTING DOCUMENTS

Access dimensions, specifications, instructions, technical drawings and other supporting documents located at: [draperinc.com/documents.aspx](http://draperinc.com/documents.aspx)

## RATINGS / SAFETY MEASUREMENTS:

- Aut-O-Loc 2™ is rated for a 1,000 lb (454 kg) load.
- It incorporates a 2" (51 mm) wide polyester belt with a breaking strength rating of 6,000 lb (2,721 kg).
- Will withstand a 1,750 lb (794 kg) free falling load without any failure of components or the belt.

For more information on this product visit:

[draperinc.com/gymequipment/basketballaccessories.aspx](http://draperinc.com/gymequipment/basketballaccessories.aspx)