

PURALIGHT® FLEX RGBTW

Deliver vibrant, full-color RGBW illumination with a flexible, cuttable LED array. Illuminate the experience for signage, backlighting, exhibitions, events, and more. The RGB-Tunable White sheet delivers a range from 3000K to 6500K in addition to dynamic color.

Date _____

Project Notes _____



FEATURES

- Field cuttable
- 80W per sheet (20 × 9 in.)
- Up to 5300 lumens
- 5 Year Warranty



ORDERING CODES

Order spools, and components for field assembly

OPTIONAL ORDERING CODES

Add Driver

	Voltage	Model	CCT	Beam Angle	Dimensions	Driver
DI						
	24V (24V Volt)	PS	RGBTW (RGBTW)	120 (120° Beam Angle)	2009 (20 × 9 in.)	O/O (On / Off) PoE (Power over Ethernet)

PURALIGHT® FLEX RGBTW - SPECIFICATION TABLE

Models	24V-PS-RGBTW-120-2009
Voltage	24VDC
Wattage	80W
Lumens RGBTW	Red: 525 Green: 1040 Blue: 260 6500K: 1840 3000K: 1650 All on: 5300 Lm.
Cut Points	4.8 × 1.6 in.
Max Run (ft.)	1 Sheet
CRI	80+
Dimensions	20 × 9 in. (L x W)
Environment	Indoor/Damp Location (IP20)
Chip Type	5050, 2835
Certification	UL Listed 2108
Warranty	5 Year

PURALIGHT® FLEX RGBTW

Deliver vibrant, full-color RGBW illumination with a flexible, cuttable LED array. Illuminate the experience for signage, backlighting, exhibitions, events, and more. The RGB-Tunable White sheet delivers a range from 3000K to 6500K in addition to dynamic color.

Date _____

Project Notes _____



24
VDC

RECOMMENDED 24V DRIVERS

SKU	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE	MAXIMUM LOAD	MINIMUM LOAD	CLASS 2	DIMMABLE	LENGTH	WIDTH	HEIGHT
MEANWELL Constant Voltage Driver Drivers for on/off or PWM dimming applications. https://www.diodeled.com/custom/download/productFile/fileName/commercial-grade-CV-Driver-Specification%20Sheet%20(24V%20Models).pdf/									
MEANWELL Constant Voltage Driver Specification Sheet Contains: • Additional Models • Additional Features • Derating Curves • System Diagrams									
DI-CV-MW24V60W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
DI-CV-MW24V60W-277-LPS	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	11.25 in.	3.75 in.	1.9 in.
DI-CV-MW24V90W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	90W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
DI-CV-MW24V90W-277-LPL	120 ~ 277VAC 50/60Hz	24V	90W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	13.5 in.	4.5 in.	2.38 in.
DI-CV-24V150W-277	120 ~ 277VAC 50/60Hz	24V	150W	No Minimum Load	No	Yes, with compatible PWM dimmer/controls	9 in.	2.67 in.	1.5 in.
DI-CV-24V240W-277	120 ~ 277VAC 50/60Hz	24V	240W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	9.61 in.	2.67 in.	1.53 in.
DI-CV-24V320W-277	120 ~ 277VAC 50/60Hz	24V	320W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	9.92 in.	3.54 in.	1.72 in.
DI-CV-24V480W-277	120 ~ 277VAC 50/60Hz	24V	480W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	10.31 in.	4.92 in.	1.72 in.
DI-CV-24V600W-277	120 ~ 277VAC 50/60Hz	24V	600W	No Minimum Load	No	Yes, with Compatible PWM dimmer/controls	11.02 in.	5.67 in.	1.9 in.
VLM Series Constant Voltage Driver Compact driver for on/off, PWM dimming, and color-changing applications. https://www.diodeled.com/custom/download/productFile/fileName/VLM-Specification%20Sheet%20(Driver%20&%20J-Box).pdf/									
VLM Series Constant Voltage Driver Specification Sheet Contains: • Additional Models • Additional Features • Derating Curves • System Diagrams									
VLM60W-24-LPS3R	120 / 277VAC 47 ~ 63Hz	24V	60W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
VLM60W-24-LPM	120 / 277VAC 47 ~ 63Hz	24V	60W	No Minimum Load	Yes	PWM	8.19 in.	2.94 in.	1.31 in.
VLM100W-24-LPS3R	120 / 277VAC 47 ~ 63Hz	24V	100W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
PoE (Power over Ethernet) Constant voltage platform, ready for Power over Ethernet (inquire)									

RECOMMENDED CONTROLLERS

SKU	DESCRIPTION
Nicolaudio DMX LED Controllers Store up to 500 scenes across 10 separate zones with a full-color display.	
DI-DMX-ESA	Nicolaudio Easy Stand Alone DMX LED Color Controller - 5k Memory
Decoder Control System Decoders used to translate a DMX signal into the PWM control signal for our color changing LEDs.	
DI-DMX-DEC-5	DMX 5-Channel Decoder with Remote Device Management
DI-DMX-DEC-25	DMX 512 25-Channel Decoder RDM with Digital Display controls LED RGB, RGBW, RGBWW lighting fixtures



PURALIGHT® FLEX RGBTW

Deliver vibrant, full-color RGBW illumination with a flexible, cuttable LED array. Illuminate the experience for signage, backlighting, exhibitions, events, and more. The RGB-Tunable White sheet delivers a range from 3000K to 6500K in addition to dynamic color.

Date _____


Project Notes _____



24
VDC

MECHANICAL DIAGRAMS

24V-PS-RGBTW-120-2009

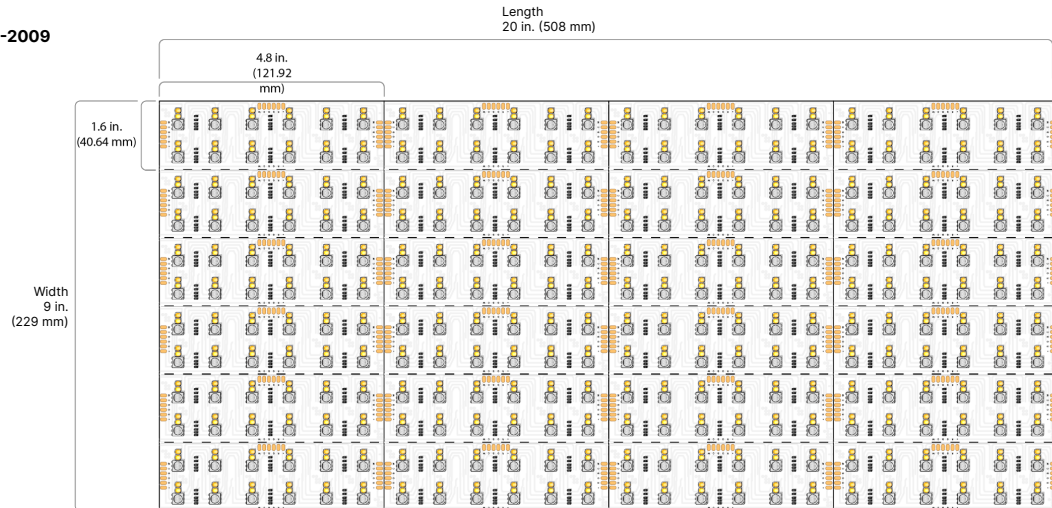

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.

PURALIGHT® FLEX RGBTW

Deliver vibrant, full-color RGBW illumination with a flexible, cuttable LED array. Illuminate the experience for signage, backlighting, exhibitions, events, and more. The RGB-Tunable White sheet delivers a range from 3000K to 6500K in addition to dynamic color.

Date

Project Notes



CERTIFICATIONS

Safety

- UL Listed 2108 Low Voltage Luminaires. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.

Performance

- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

Safety / Warnings / Disclosures

- Install in accordance with national and local electrical code regulations.
- This product is intended to be installed and serviced by a qualified, licensed electrician.
- Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
- Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
- Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
- Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
- Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
- Do not modify product beyond instructions or warranty will be void.
- Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
- We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

WARRANTY

Limited Warranty

- 5 Year limited warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.diodeled.com/limited-warranty/ within the Policies section. For warranty related questions please contact product support.

Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.