



Adjustable Slide Bar Installation

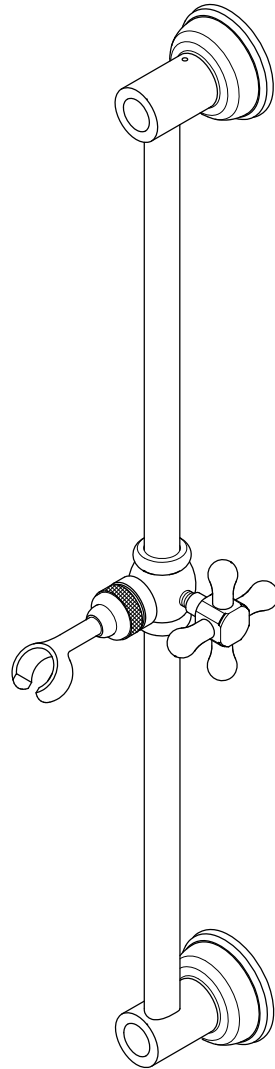


Parts:



www.eodfaucet.com
 TOLL-FREE CUSTOMER SERVICE: 877-FAUCET-1(328-2381)
 TECHNICAL SUPPORT E-mail: info@eodfaucet.com
 12775 Reservoir Street, Chino, CA 91710

Need Tools:

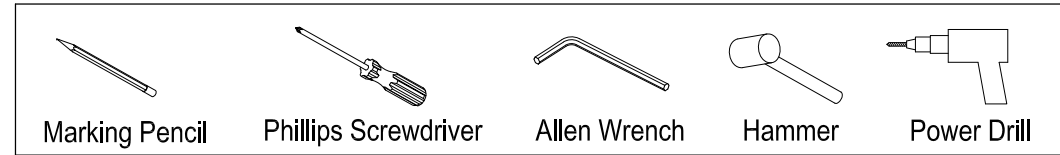

Legal Disclaimer :

This bar is not to be used as a grab bar and it is not intended to support weight. Before you begin, identify the appropriate area to install this slide bar, proper location should be above 48" from the floor (as per ASTM F446). It is recommended that slide bar to be mounted directly to the structural framing of your home. If necessary, cross bracing can be installed to provide adequate support.

Installation:

<p>1</p>	<p>1. Assemble slide bar and position at the desired location.</p>	<p>2</p>	<p>2. Mark the position of the mounting screw by inserting a pencil through the center of the end post.</p>
<p>3</p>	<p>3. Remove slide bar and drill a small hole, insert plastic anchor until it is flushed with the surface of the wall.</p>	<p>4</p>	<p>4. Attach both upper and lower bases by inserting the enclosed screws through the brass fitting preinstalled on the escutcheon, insert the slide bar posts onto the brass fitting, and secure by threading the set screw, press cover button in place.</p>