

# CONTRACTOR LE

LEADING EDGE SRD

## Cutting Edge Fall Protection for Leading Edge Applications

Now  
Available in  
20' Length

The FallTech Contractor LE SRD is designed to provide the highest level of safety when working around unprotected sides and edges including leading edges.

Available in 20', 30' and 50' lengths and tested to the most rigorous global standards, the Contractor LE SRD is third party certified as compliant with the leading edge test requirements of ANSI Z359.14-2014.

- May be used as a traditional SRD for overhead anchorage options or in below harness D-ring anchorage conditions.
- 7/32" Galvanized steel cable for added cut resistance.
- Dual energy absorber system – internal inertial brake and external shock pack – reduces the risk of cable failure when contacting an edge during a fall event.
- ANSI Z359.13 compliant external energy absorber to reduce impact forces during edge contact in a fall event.
- Certified as ANSI Z359.14 LE.




727620LE

# Contractor LE



## Typical FallTech Leading Edge SRL-LE Performance

Part #	Anchorage Condition	SRD Class	Arrest Distance	Average Arrest Force	Maximum Arrest Force
<b>727620LE</b> 20' Leading Edge SRD-LE	Overhead Non-Leading Edge	B	33"	843 lbs.	1,155 lbs.
	Leading Edge Condition, Foot-Level with 5' Setback	B	78"	1,102 lbs.	1,558 lbs.
	Leading Edge Condition, Foot-Level with 0' Setback	B	121"	848 lbs.	1,338 lbs.
<b>727630LE</b> 30' Leading Edge SRL-LE	Overhead Non-Leading Edge	B	33"	843 lbs.	1,155 lbs.
	Leading Edge Condition, Foot-Level with 5' Setback	B	78"	1,102 lbs.	1,558 lbs.
	Leading Edge Condition, Foot-Level with 0' Setback	B	121"	848 lbs.	1,338 lbs.
<b>727650LE</b> 50' Leading Edge SRL-LE	Overhead Non-Leading Edge	B	51"	944 lbs.	1,330 lbs.
	Leading Edge Condition, Foot-Level with 5' Setback	B	73"	1,138 lbs.	1,622 lbs.
	Leading Edge Condition, Foot-Level with 0' Setback	B	120"	951 lbs.	1,435 lbs.

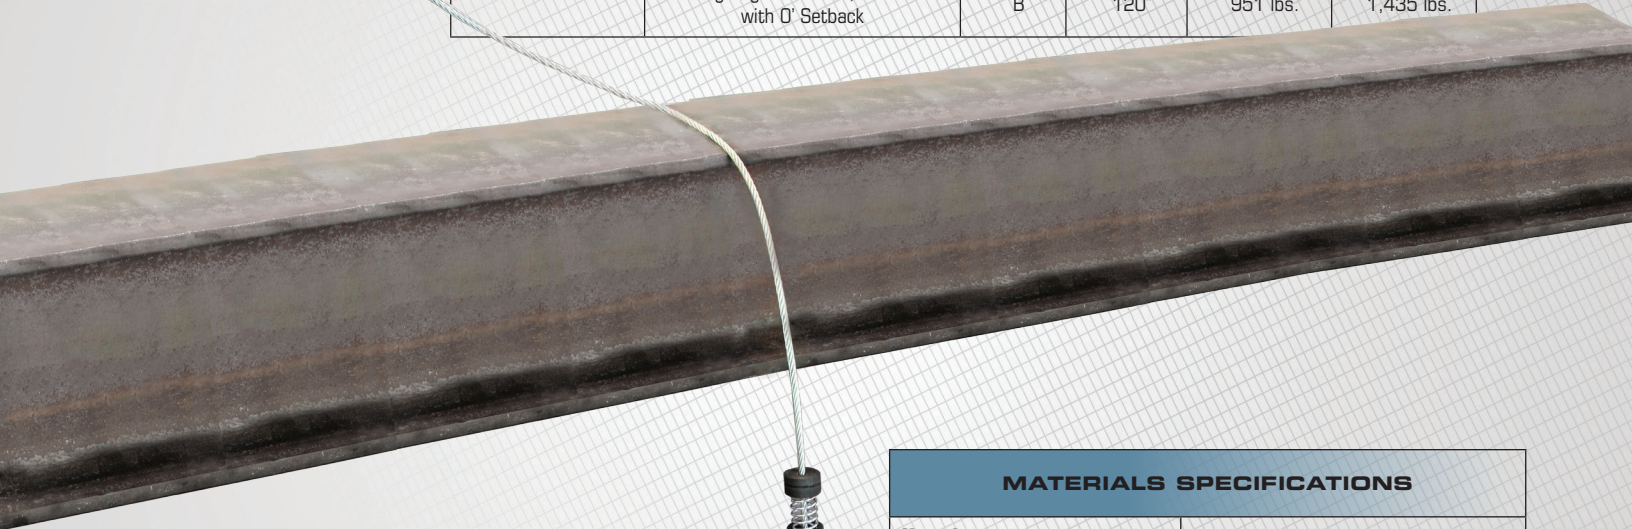

### MATERIALS SPECIFICATIONS

<b>Housing:</b>	Glass-filled Polycarbonate, Nylon
<b>Cable:</b>	7/32" Galvanized Steel Cable, 3,400 lbs. Minimum
<b>Connectors:</b>	Load-Indicating Swivel Carabiner and Anchorage Carabiner; 5,000 lbs. Tensile Strength and 3,600 lbs. Gate Strength

### PERFORMANCE SPECIFICATIONS

<b>Maximum Arrest Distance:</b>	54" or less
<b>Average Arrest Force:</b>	1,125 lbs. or less
<b>Maximum Arrest Force:</b>	1,800 lbs.
<b>User Capacity:</b>	130 to 310 lbs.