


TOP PIVOT ASSEMBLY


TOP PIVOT BRACKET

BOTTOM PIVOT ASSEMBLY

BOTTOM PIVOT BRACKET

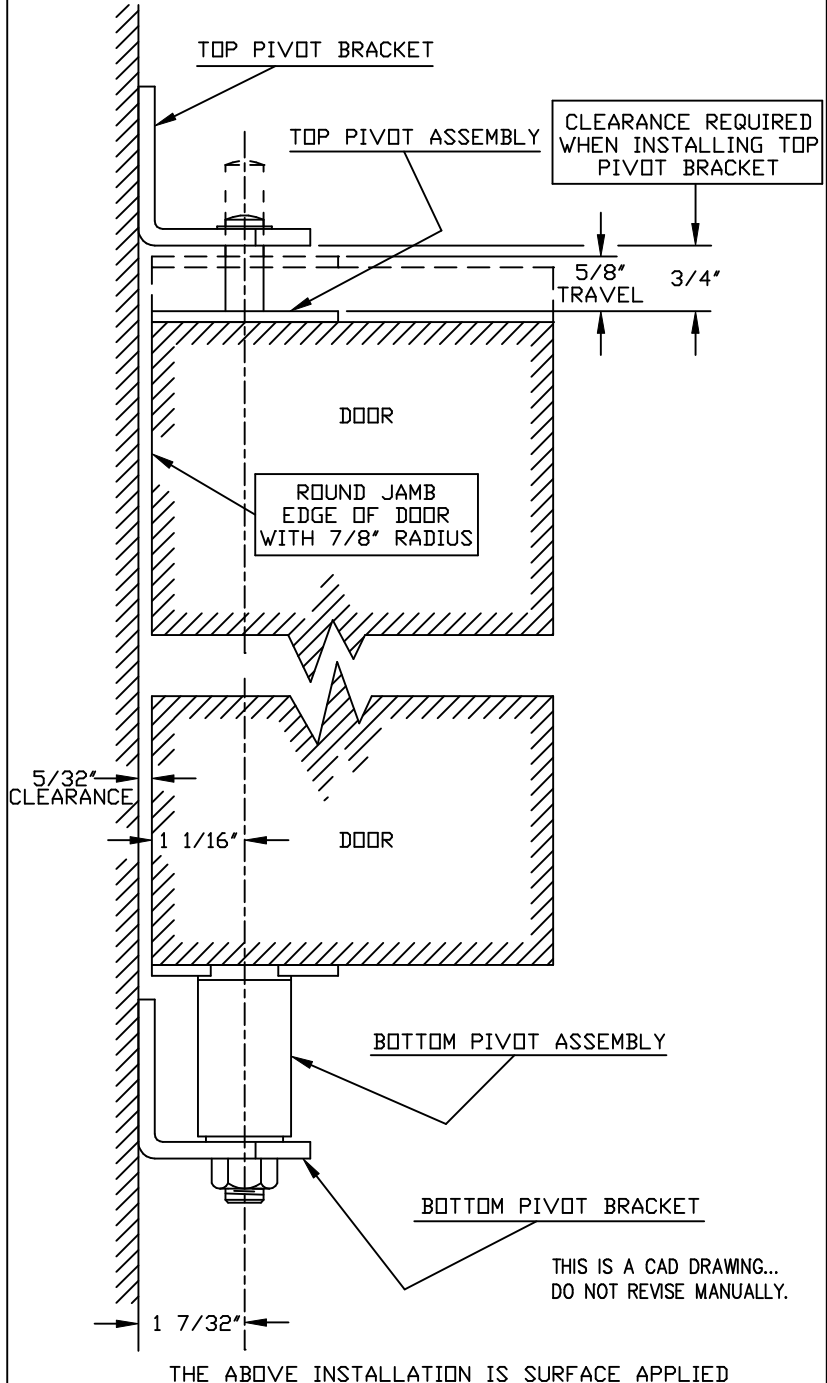

THE ABOVE INSTALLATION IS SURFACE APPLIED

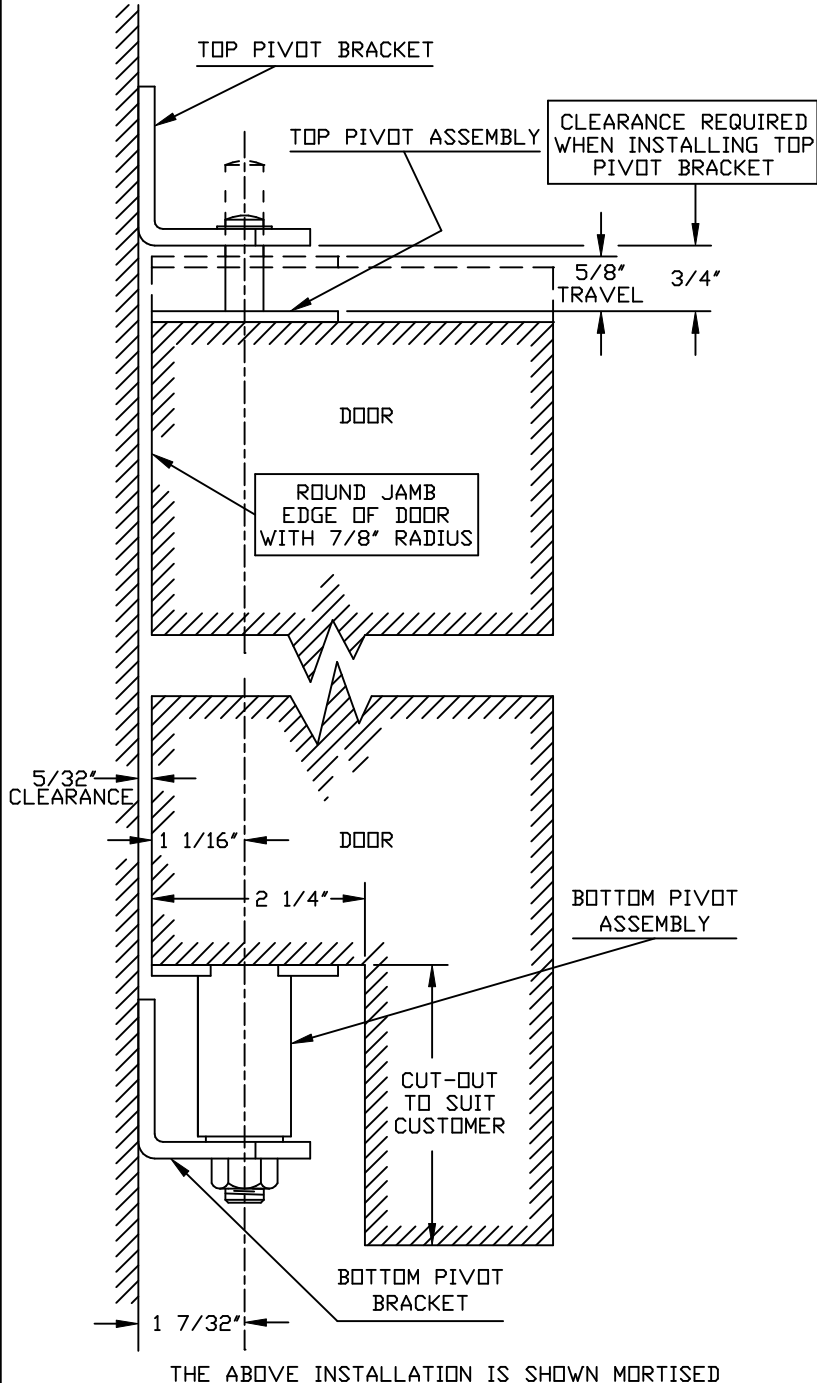

THE ABOVE INSTALLATION IS SHOWN MORTISED

-----DOOR-----		SCREWS		-----NOTE-----		BOMMER IND. INC. LANDRUM, S.C.				
MAXIMUM WIDTH: 30" MAXIMUM WEIGHT: 50 LB. MAXIMUM THICKNESS: 7/8" TO 1 5/8"		TOP AND BOTTOM PIVOT ASSY.		DOOR THICKNESS 7/8" TO 1 5/8" *PIVOT EDGE OF DOOR WILL HAVE TO BE ROUNDED TO 7/8" RADIUS FROM THE PIVOT CENTER LINE TO CLEAR JAMB		TYPE : LOUVER DOOR GRAVITY PIVOT DOUBLE ACTING				
		No. 10 x 1" F.H.W.S. (4) 10-24 x 1/2" F.H.M.S. (4) TOP AND BOTTOM BRACKET				PART NO.: 7512 AND 7512-H				
		No. 10 x 1 1/4" F.H.W.S. (4) 10-24 x 1/2" F.H.M.S. (4)				Drawn by : JACKSON	DATE	SCALE	DRAWING NUMBER	REV.
						Approved by :	09 AUG 04	N.T.S.	7512TEMP	A