





# Pin Tumbler Locks

Brass Construction

*Custom keying available upon request. Call for info*




Flush  
N8102  
N8106





Lipped/  
Overlay  
N8103  
N8109



Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness
N8102 26D	Flush	1 1/16"	3/4"
N8103 26D	Lipped/OL	1 1/16"	7/8"
N8106 26D	Flush	1 1/16"	1 1/8"
N8109 26D	Lipped/OL	1 3/4"	1 1/2"

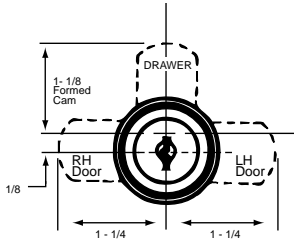

**Cam Dimensions**  
Through the use of a shifter, the 360° key turn turns the cam 90° in either direction. Actual application determines which cam position is the locked position. Each lock is furnished with an alternate cam for opposite cam turn.

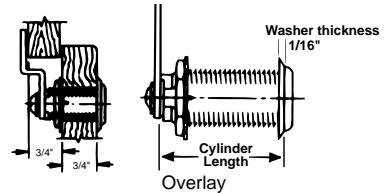

Specific cams to be used with N8102 lock are available for overlay construction using a 3/4" thick front and 3/4" thick frame. See catalog page C-51 for cams.

Applications: solid lines show locked position of cam	Position of shifter on back of lock	Applications: solid lines show locked position of cam	Position of shifter on back of lock

• Master Keys sold separately

- **OPERATION** - 90° cam turn, key removable in both locked and unlocked positions.
- **KEYING** - Will key together with all other pin tumbler locks.
- **PACKAGING** - Supplied with two keys, trim washer, spur washer (for wood), mounting nut and two cams.

Stock Keying Listed Below

Key #
N8102 26D 107, 915
N8102 26D KDM
N8103 26D 107, 915
N8103 26D KDM
N8106 26D 107, 915
N8106 26D KDM
N8109 26D 107, 915
N8109 26D KDM