


# PRODUCT DATA SHEET

**Product Description:** Riley Interconnected Lock with deadbolt and reversible passage lever. Levers fabricated from die cast zinc, escutcheon fabricated from stainless steel with US15 satin nickel finish. Single locking functionality; deadbolt is operated with a key outside and thumb turn inside. Deadbolt and passage latches are simultaneously retracted by lever operation from inside for single motion exit. ANSI Grade 2; ADA Compliant; and UL10 C 3-hour fire rated.

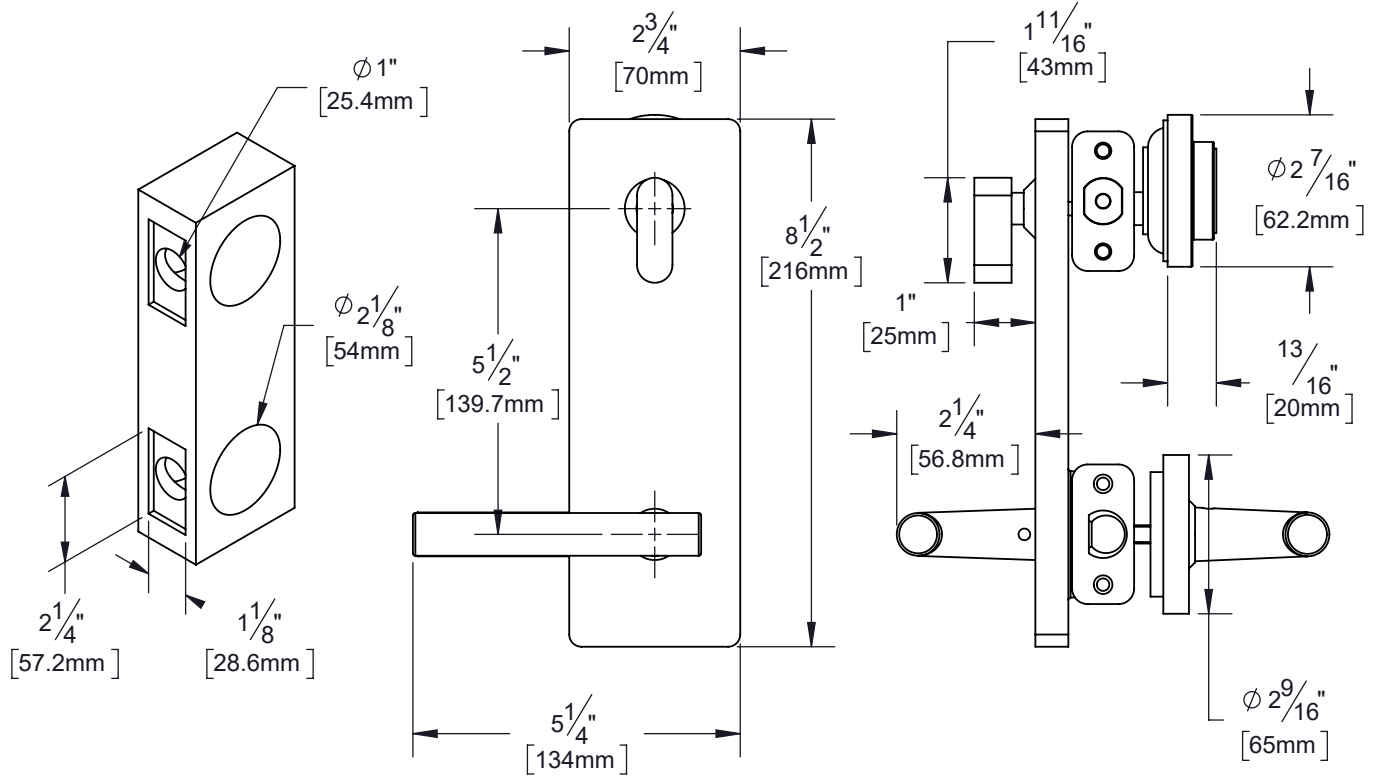

**Door Prep:** Cross Bore  $2\frac{1}{8}+$ ; Edge Bore  $1+$ ; Leaver And Deadbolt Bores  $5\frac{1}{2}+$  Center To Center  
**Door Thickness:** Fits Doors  $1\frac{3}{8}+$  to  $1\frac{3}{4}$  Thick  
**Faceplates:** Radius Corners  $1\frac{1}{8} \times 2\frac{1}{4}+$   
**Backsets:** Both Deadbolt and Passage Latches Adjustable  $2\frac{3}{8}+$  to  $2\frac{3}{4}+$   
**Strike Plates:** Radius Corners, Full Lip,  $2\frac{3}{4} \times 1\frac{1}{8}+$   
**Bolts:** Lever  $1\frac{1}{2}$ " Throw, Deadbolt  $1+$  Throw  
**Lock Cylinder:** Kwikset Type KW1 5-Pin Cylinder  
**Handing:** Reversible Levers

**REKEY OPTIONAL**




**Overall Size:**  $5\frac{1}{4}$ " W X  $8\frac{1}{2}$ " H X  $2\frac{5}{8}$ " D

**Material:** Zinc Handles, Stainless Steel Escutcheon

**Finish:** US15 Satin Nickel

### Cross Reference

Manufacturer	Part Number

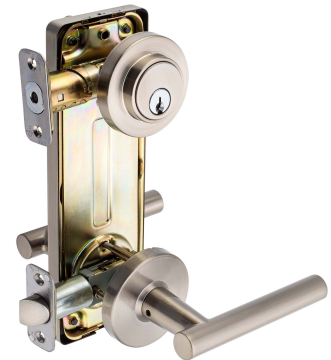

Description: **Riley Interconnected Lock, Passage Lever And Deadbolt, UL 10C 3-Hour Fire Rated, ANSI Grade 2**

Part Number: **87432**

Date: **01/21** Rev. **01**

Sheet 1 of 1