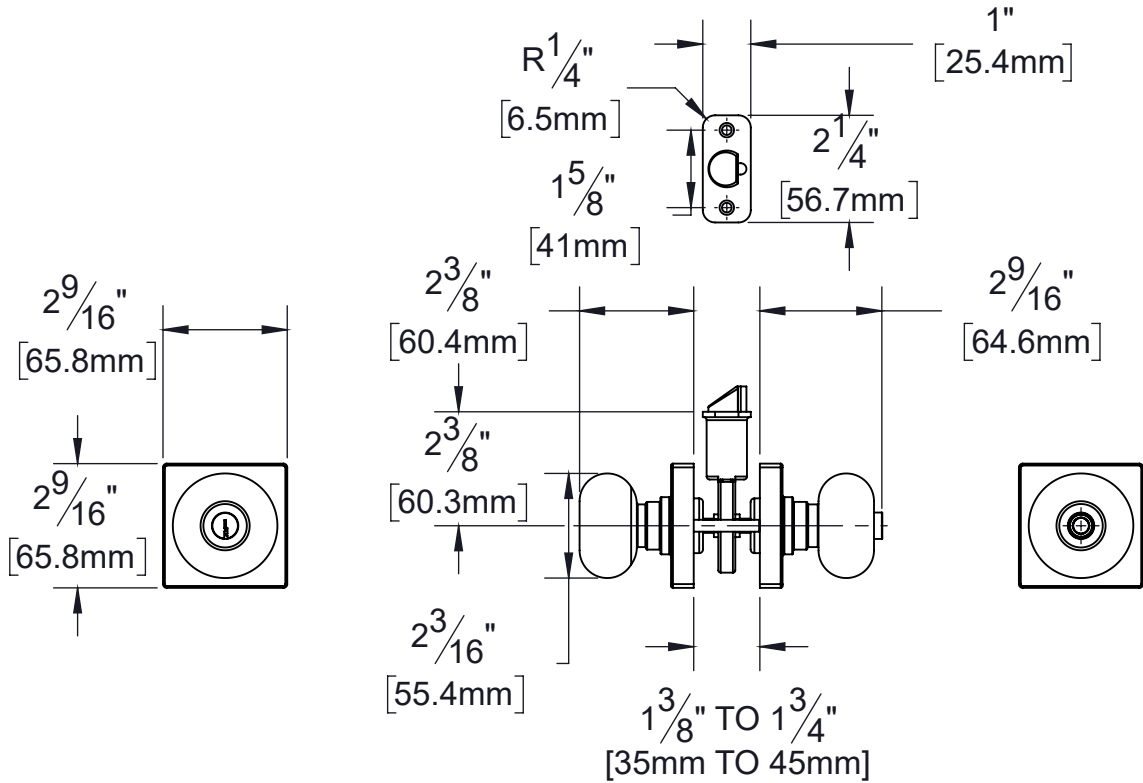# PRODUCT DATA SHEET

Product Description: Entry lock knob. ANSI Grade 3 with a Kwikset KW 1 Keyway. Fabricated from brass with a US15 satin nickel finish. Locked or unlocked by key outside or push button inside. Ships with mounting hardware. Lock ships with mortise latch. Optional drive in latch (product #87392) and UL10C fire rated latch (product #87370) available.

R 1/4" [6.5mm]

1" [25.4mm]

2 1/4" [56.7mm]

1 5/8" [41mm]

2 9/16" [65.8mm]

2 9/16" [65.8mm]

2 3/8" [60.4mm]

2 9/16" [64.6mm]

2 3/8" [60.3mm]

2 3/16" [55.4mm]

1 3/8" TO 1 3/4" [35mm TO 45mm]

Door Prep: Cross Bore 2 1/8", Edge Bore 1", Mortise Latch Face 1" x 2 1/4", Optional Drive In Latch 1" Diameter Drilled Hole
Latches: Ships With Mortise Latch As Shown Above. Optional Drive In Or UL10C Fire Rated Latches Available
Backset: Adjustable Latch to 2 3/8' or 2 3/4 "
Door Thickness: Fit all 1 3/8" - 1 3/4" Standard Doors
Cylinder: Brass with 5 Pin Tumbler Kwikset KW 1 Keyway
Strike Plate: 2 1/4" Full Lip Strike
Bolt: 1/2" Throw

REKEY OPTIONAL

Optional UL Latch Available | ANSI 3 | KW1 KEYWAY

Overall Size:	2 9/16" W X 2 9/16" H X 2 9/16" D
Material:	Brass
Finish:	US15 Satin Nickel

Cross Reference

Manufacturer	Part Number

Harney HARDWARE

Description:

Lock Knob, Entry, Kendall, KW1, ANSI Grade 3

Part Number:	Date	Rev.
87813	09/17	00
	Sheet 1 of 1	