


Baseball Anchor Installation Instructions

BB-ANCHOR, applicable with: BB-200, BB-400, BB-500, HP-200

1. Prepare a 10 inch square approximately 2-1/2 inches away from the base line by digging 7 inches deep.
2. Drive a 10" long, 1-1/2 inch square peg into the center of the hole. Do not set the wooden peg too firmly, in order to be able to remove it later. Make sure the sides of the peg are parallel to the base line and the top of the peg is perpendicular to the ground level.
3. Place the ground anchor over the peg, flared end down. The bottom of the anchor should rest on the bottom of the hole. With a straight edge, check to insure that there is a distance of 1 inch from the top of the ground anchor to ground level.
4. In order to prevent concrete from blocking the lower end of the ground anchor tube or from holding in the peg, press a small amount of dirt around the bottom of the ground anchor.
5. Fill the hole with 5" of concrete. The upper end of the ground anchor should be 1 inch above the top of the concrete. Concrete should be completely hardened before removing the peg. Insert BB-Plug (recommended).
6. Fill hole with dirt on top of concrete, on an angle from the outer edge of the hole inward and downward to where the ground anchor tube and the concrete meet.

MAINTENANCE: Keep ground anchors covered with BB-Plugs when not in use to prevent dirt from getting into the anchor. Remove any dirt that might obstruct the base from entering the ground anchor.

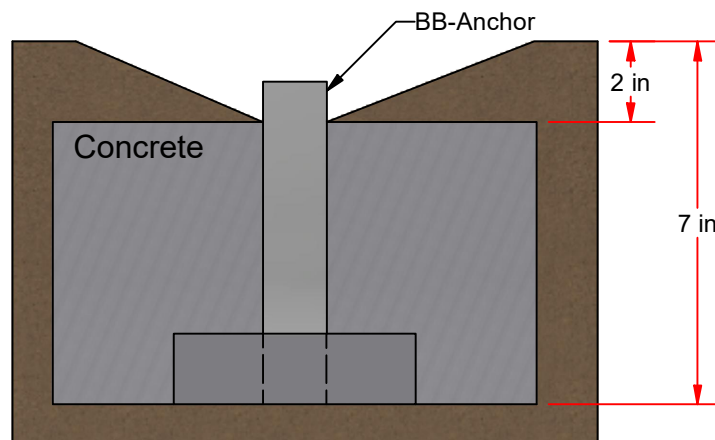

BB-ANCHOR_INSTALL

Anchor Installation Instructions

© COPYRIGHT JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

www.jayprosports.com
(800) 243-0533
976 Hartford Turnpike
Waterford, CT 06385 USA

Rev:

SHEET 1 OF 1