


TOP VIEW (COVER)

SIDE VIEW (SYS)

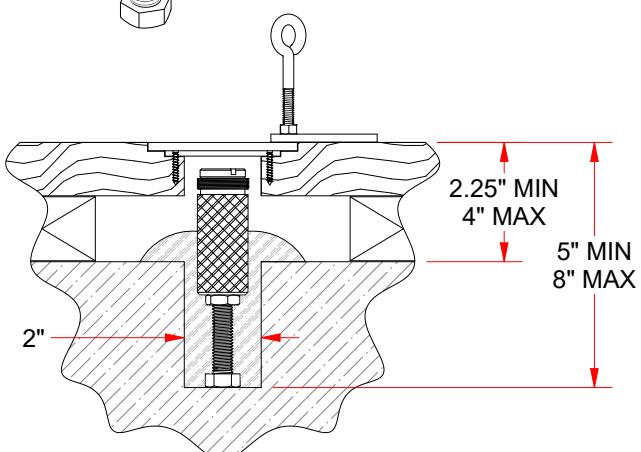

EXAMPLE INSTALLATION

NOTE: INSTALL ANCHOR WITH HYDRAULIC CEMENT OR NON-SHRINK GROUT. SEE INSTALLATION MANUAL FOR DETAILS.

#### FLOATING WOOD FLOOR ANCHOR FEATURES:

- REPLACEABLE INTERNAL COMPONENTS IN THE EVENT OF STRIPPING OR GENERAL DEGRADATION (P/N FP895, FP896, FP897)
- DURABLE CONSTRUCTION - BILLET STEEL BODY PROVIDES 9,000 lbs PULLOUT STRENGTH
- DESIGNED FOR USE IN FLOATING WOOD FLOORING - BRASS COVER PLATE & ANCHOR WORK INDEPENDENTLY TO ACCOMMODATE FLOORING TYPE
- INTENDED USE FOR SYSTEMS WITH T-STYLE OR ROUND FLOOR ANCHORING BASES
- LIMITED WARRANTY: 3 YEARS

PROJECT NAME \_\_\_\_\_

ARCHITECT \_\_\_\_\_

PROJECT NUMBER \_\_\_\_\_

CONTRACTOR \_\_\_\_\_