


WallGuard Fire / Impact Corner Wall Padding

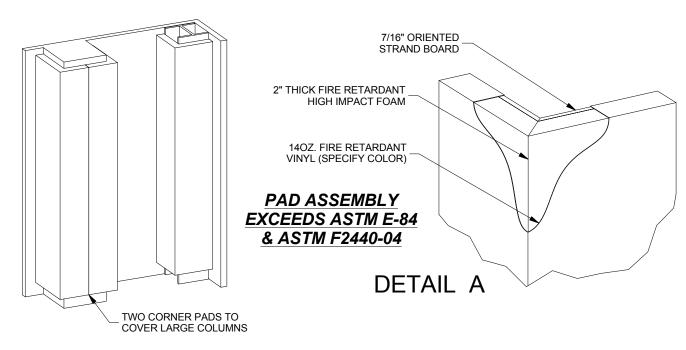

SPECIFICATIONS - CLASS A / HIGH IMPACT CORNER PADS

Jaypro Sport Fire Retardant High Impact Corner Pads are for indoor use only. Corner pad assembly meets or exceeds the requirements of NFPA 101 Life Safety Code for Class A rating (Flame Spread 0-25, Smoke Development 0-450) and Califorina State (CSFM) test requirements. All testing completed in accordance with ASTM-E84 (also published as NFPA-255, ANSI 2.5, UBC-8-1, and UL 723). Pad meets or exceeds impact standards as defined in ASTM F2440-04.

Construction: Pad shall have 2" thick fire retardant high impact foam bonded to a 7/16" oriented strand board (OSB) backing. Vinyl shall be wrapped around backside of backer board and secured with steel staples. Vinyl shall be 14 oz per square yard with grab tensile strength 365lbs x 348lbs and tongue tear strength 92lbs x 83lbs. Vinyl shall be washable and resistant to fade, rot, mildew, and fungus.


Attachment: Corner pads available with z-clip top and bottom, z-clip top and 1" margin bottom, or 1" margin top and bottom. Corner pads can be mounted to wood, drywall, concrete, brick, etc using the appropriate fasteners supplied by others (not Jaypro).

Custom corner pad sizes are available. See additional specification for flat wall pads, straight column pads, and tapered column pads. Vinyl available in 14 standard colors.

DECCRIPTION

D/N

QUANTITY		P/N		DESCRIPTI	ON	
	JWCL-AI		ZZ	Z-CLIP TOP & B	OTTOM	
	JWCL-AI		Z	Z-CLIP TOP, 1" LIP BOTTOM		
<u> </u>	JWCL-AI		_	1" LIP TOP & BOTTOM		
					SPECIFY COL	_OR
PROJECT NAME					ROYAL BLUE	☐ PURPLE
PROJECT NUMBE	B				☐ NAVY BLUE	RED
PROJECT NOWBE	.K				LIGHT BLUE	MAROON
ARCHITECT					☐ FOREST GREEN	ORANGE
					KELLY GREEN	YELLOW
CONTRACTOR					BLACK	☐TAN
					WHITE	GRAY
NOTES						





OLIANTITY



www.jaypro.com (800) 243-0533 976 Hartford Turnpike Waterford, CT 06385 USA

Sheet 1 of 1