


Defoam-It

Silicone Emulsion Carpet Defoamer

Antiespumante de Emulsión Silicona

- Highly Concentrated • Water-Based
- Reduces Foam in Recovery Tanks

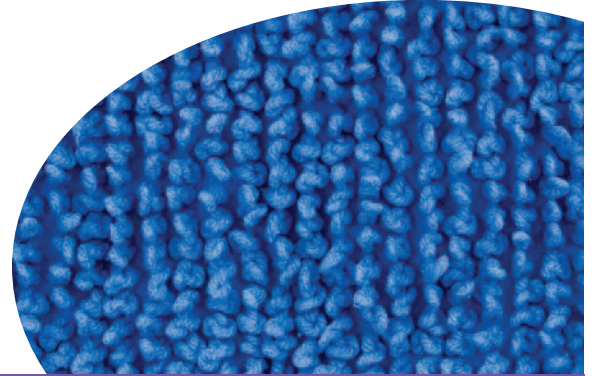

Technical Data Sheet

PRODUCT DESCRIPTION:

A highly concentrated, water-based silicone emulsion designed for reducing foam in recovery tanks of extractors and automatic scrubbers.

USES:

Cuts foam in extractor pick up tanks or wet/dry vacs to prevent foam overflow and allow more material to be picked up before emptying.

ADVANTAGES:

Quick foam breaking, economical as a very small amount goes a long way.

SPECIFICATIONS:

Active Ingredients: 40%
 pH: 6.5-7
 Color: Milky White
 Solubility in Water: Mixes
 Odor: Mild
 Flash Point: None
 Viscosity: Slight
 Weight per Gallon: 8.5 Lbs.

PRODUCT/CONTAINER DISPOSAL:

Dispose of used/unwanted product according to state and local regulations. Offer container for recycling.

SIZES AVAILABLE:

1 Gallon Bottle, 5 Gallon Pail, 30 & 55 Gallon Drums.

PRODUCT USE

Carpet Defoamer	1 oz. per gallon of water in take-up tank
-----------------	---

DILUTION RATE

FOR BEST RESULTS USE WATER AT ROOM TEMPERATURE

DIRECTIONS FOR PRODUCT USE:


PRODUCT MAY SETTLE - SHAKE WELL BEFORE USING

1. Add to take-up/recovery tanks as indicated above.
2. If foaming persists, add more defoamer. Generally as experience with this product grows, less will be needed.

Coverage: 200-400 sq. ft. per gallon



It is recommended that protective gloves and safety glasses be worn when using this and all cleaning products. Refer to SDS for further safety information.

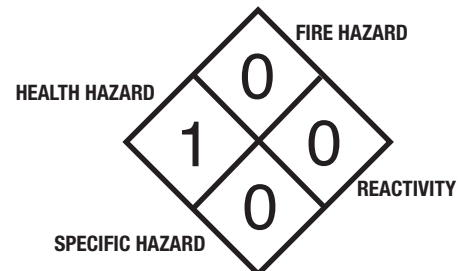

Distributed By:

J.Racenstein® Co.

1 Madison St., Bldg D4 • East Rutherford, NJ 07073
 Phone 800-221-3748 • Fax 201-348-1385
 3201 S.Harbor Blvd • Santa Ana, CA 92704
 (310) 525-3333 Fax (310) 527-0739
www.protoolcleaning.com