## 23GH 23GSH

## Indoor Emergency Safety Shower Type: Drench

Wall mounted unheated emergency safety shower, intended for use in environments where space is at a premium. This drench shower is suitable for use in all applications that don't require an eyewash and are not subject to the possibility of freezing or overheating. Available with galvanized mild steel or stainless steel pipework. ANSI compliant.




## Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK AND FITTINGS (G)	Galvanized mild steel tubulars and fittings
PIPEWORK AND FITTINGS (GS)	Stainless steel tubulars and fittings
OPERATING VALVES	316L stainless steel, two piece stay open valve
SHOWER SPRAY OUTLET	Machine molded nylon 6 red shower nozzle
SERVICES	
WATER INLET	1 in Female NPT
DESIGN OPERATING PRESSURE	1.5 to 6 BAR G (22 to 87 PSI)
TEST PRESSURE	10.3 BAR G (149 PSI)
MINIMUM FLOW AT OPERATING PRESSURE	Shower: 76 liters/minute minimum (20 US Gallons)
ENVIRONMENTAL OPERATING TEMPERATURE	
MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
OPERATIONAL	
SHOWER SPRAY OPERATION	Pull handle
NOMINAL WEIGHTS and DIMENSIONS	
DIMENSIONS - STANDARD ORIENTATION (WxDxH)	215 mm (8.5 in) x 730 mm (28.7 in) x 909 mm (35.8 in) Height includes sign
WEIGHT (NO OPTIONS)	5 kg (11 lbs)



## Indoor Emergency Safety Shower Type: Drench

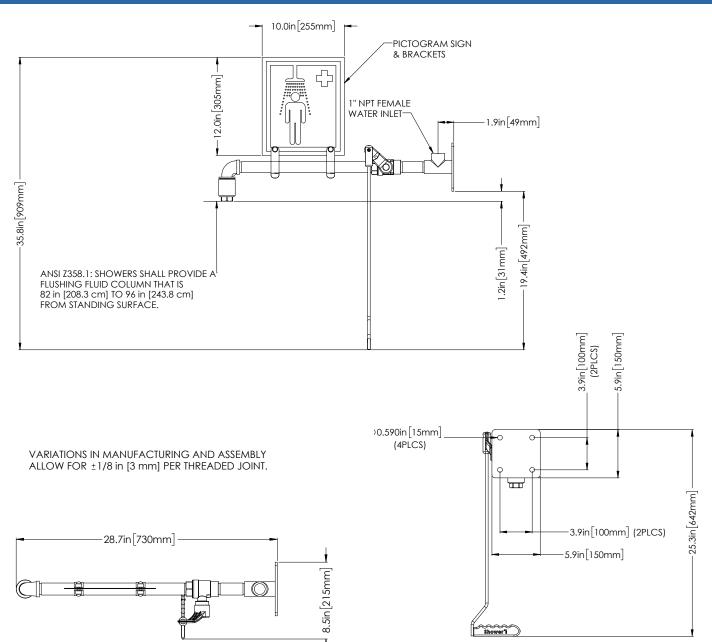

MOUNTING PLATE VIEW (MOUNTING HARDWARE NOT INCLUDED)

For Technical Support Contact: customer.service@hughes-safety.com • 1-866-312-1652

For Reorder & Sales Support Contact: custserv@justrite.com • 1-800-798-9250

