



*their safety is essential.*

Products made to work hard—and built to last.

## EcoPolyBlend™ Accumulation Centers

### Create a customized spill containment system

Modular EcoPolyBlend™ Accumulation Centers combine to create a custom spill control system to fit your space. Ideal for drum filling and dispensing operations. Use the optional joining clips to firmly lock units together; sumps remain separate, and clips can be removed for easy repositioning. For applications where a continuous sump is required, the optional Sump-to-Sump™ Drain Kit joins platforms together for a compliant solution. Kit includes one pair rubber grommets, joining clips, and one PTFE transfer tube.


- Low-profile centers measure 5.5 in (140 mm) high for easy handling of drums
- Seamless construction eliminates leaks
- Durable polyethylene construction is chemical resistant; black models and grates made with 100% recycled polyethylene
- Self-locating grates stay firmly in place, yet are removable for easy cleaning
- Nestable design minimizes storage space requirements when not in use
- Black models hide grime and dirt to keep your workplace looking clean; yellow models are high-visibility, easy to see on job sites
- All models are EPA compliant and support SPCC as standalone or after sump connection
- Load and unload heavy drums with ease using optional ramp—use with centers for 2 drums or larger



Modular design lets you join centers together to fit your space and application.

### Custom Configurations

Use Joining Clips to lock units together, or use the Sump-to-Sump Kit to reach full compliance with a continuous sump.

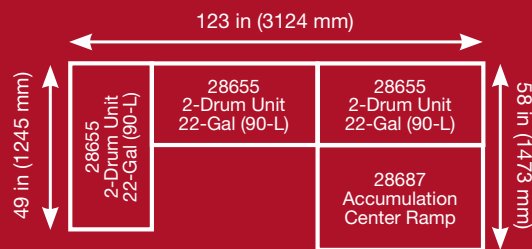

3 - 28655 2-Drum Unit  
1 - 28687 Ramp  
2 - 28927 Sump-to-Sump™ Drain Kits



Description	Sump Capacity Gallons/Liters	Load-bearing* Capacity lb/kg	External Dim. W x D x H	Compliance†	Model No Black	Model No Yellow	Ship Wt lb/kg
1 drum center	12/45	1250/567	25 x 25 x 5.5 in / 635 x 635 x 140 mm	E, S, O, I	28653	28652	17/8
2 drum center	24/90	2500/1134	49 x 25 x 5.5 in / 1245 x 635 x 140 mm		28655	28654	32/15
4 drum center	49/185	5000/2268	49 x 49 x 5.5 in / 1245 x 1245 x 140 mm		28657	28656	61/28
6 drum center	73/276	7500/3402	73 x 49 x 5.5 in / 1854 x 1245 x 140 mm		28659	28658	91/41
8 drum center	98/371	10,000/4536	97 x 49 x 5.5 in / 2464 x 1245 x 140 mm		28661	28660	122/55
Ramp for above	—	1000/455	48 x 33 x 6.25 in / 1219 x 838 x 159 mm		28687	28650	41/19
Joining clips, one pair, stainless steel	—	—	4 x 2 in / 102 x 51 mm		28926	—	1/0.5
Sump-to-Sump™ drain kit	—	—	—		28927	—	

### EcoPolyBlend™ Replacement Grates (100% recycled)

2 drum grate for all sizes except 1 drum	24 x 48 x 2.5 in / 610 x 1219 x 63 mm	—	28259	—	16/7
1 drum grate for 1 drum unit and 3 drum in-line	24 x 24 x 2.5 in / 610 x 610 x 63 mm	—	28260	—	8/4

\*Loads are stated as a total safe allowable uniform distributed load and apply to service temperature range of -30°F to 120°F (-34°C to 49°C)  
†E = EPA compliant; S = supports SPCC; O = OSHA compliant; I = IFC compliant