L18GS34G Indoor Emergency Safety Shower Type: Laboratory, Combination

Unheated floor mounted laboratory shower with eye/face wash unit suitable for laboratories and general light duty indoor use. The powder coated stainless steel pipework ensures resistance to corrosive and flammable materials while being easy to clean.

Meets the requirements of ANSI Z358.1-2014 and the European Standard EN 15154 for plumbed in laboratory showers. Includes universal eye wash and shower sign for enhanced visibility.





Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK AND FITTINGS (GS)	Stainless steel tubulars and fittings
OPERATING VALVES	316L stainless steel, two piece stay open valve
SHOWER SPRAY OUTLET	Powder coated stainless steel shower rose
EYE/FACE WASH BOWL	Powder coated stainless steel
EYE WASH DIFFUSER	Chrome plated brass with stainless steel mesh
STANDARD FINISH	Green powder coated finish
SERVICES	
WATER INLET	1 in Male NPT
DESIGN OPERATING PRESSURE	2 to 6 BAR G (29 to 87 PSI)
TEST PRESSURE	10.3 BAR G (149 PSI)
MINIMUM FLOW AT OPERATING PRESSURE	Shower: 76 liters/minute minimum (20 US Gallons). Eye/face wash: 12 liters/minute (3 US Gallons)
ENVIRONMENTAL OPERATING TEMPERATURE	
MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
OPERATIONAL	
SHOWER SPRAY OPERATION	Pull handle
EYE/FACE WASH OPERATION	Push plate
NOMINAL WEIGHTS and DIMENSIONS	
DIMENSIONS - STANDARD ORIENTATION (W \times D \times H)	319 mm (12.6 in) x 830 mm (32.7 in) x 2566 mm (101 in) Height includes sign
WEIGHT (NO OPTIONS)	15 kg (33 lb)




Indoor Emergency Safety Shower Type: Laboratory, Combination

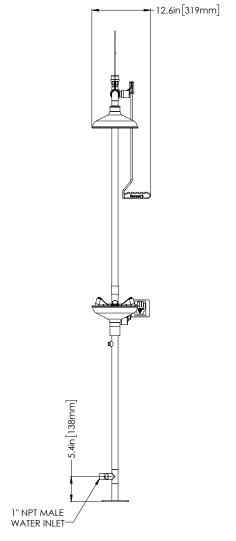



MOUNTING PLATE VIEW (MOUNTING HARDWARE SOLD SEPARATELY)

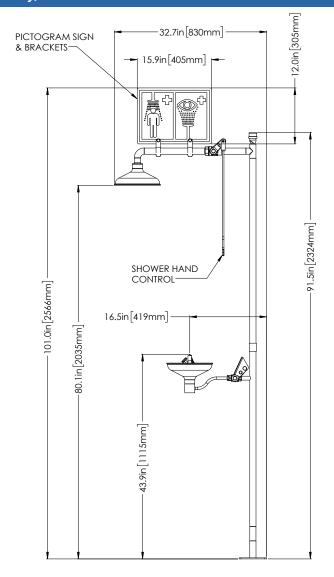

VARIATIONS IN MANUFACTURING AND ASSEMBLY ALLOW FOR ±1/8 in [3 mm] PER THREADED JOINT.

For Technical Support Contact: customer.service@hughes-safety.com • 1-866-312-1652

For Reorder & Sales Support Contact: custserv@justrite.com • 1-800-798-9250

