



Drum Cradle Loading Procedure



Position drum cradle to rotate drum from vertical to horizontal position.


Feet are under drum and hook on the handle is engaged on the top drum chime.



Rotate drum to horizontal position using handle for leverage.



Handle hook engaged

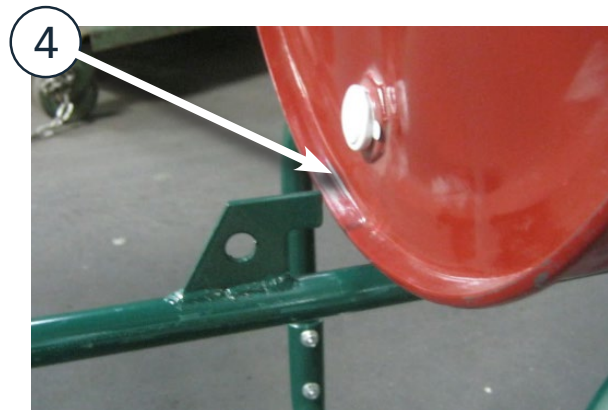

Handle hook disengaged



Handle retracted, ready for lift truck fork entry.



Lift truck forks fully supporting drum cradle and drum.



Maintain adequate clearance between lift truck forks, mast and any fittings installed in the head of the drum.



The drum cradle and loaded drum are ready to be positioned into a horizontal style safety cabinet. Maintain adequate clearance when positioning load inside the cabinet.

North America	1-800-798-9250	custserv@justrite.com
Europe	+31 (0) 180 615 744	saleseu@justrite.com
Asia Pacific	011+86-756-322-9909	internationalcs@justrite.com

JR485 (1021)
Justrite.com
©2021 Justrite Mfg. Co., LLC