




Nitrile

## Extra durability with a thin, moisture absorbing flock lining

- Soft, flock lining absorbs moisture
- Thick design resists punctures and tears
- Durable nitrile for reliable splash protection

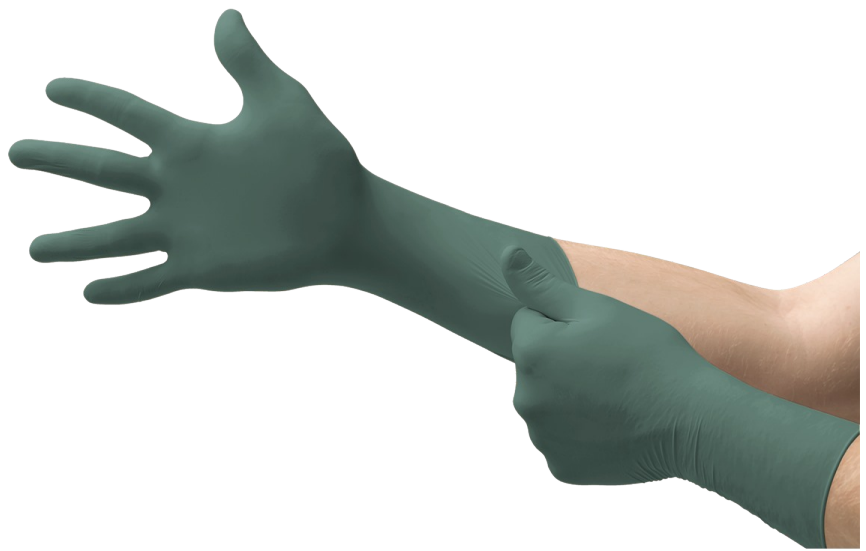

### Industries

- Automotive
- Automotive Aftermarket
- Machinery and Equipment

### Recommended For

- Production line support and maintenance
- General Purpose Auto Aftermarket
- Assembly and inspection of components



## TECHNICAL DATA SHEET

### PRODUCT INFORMATION

|  | Dura Flock <sup>®</sup> DFK-608  |
|--|--|
| <b>Material</b>                          | Nitrile  |
| <b>Color</b>                             | Green  |
| <b>Glove Design</b>                      | Flock Lined, Fully Textured  |
| <b>Cuff</b>                              | Beaded   |
| <b>Manufacturing/QMS Audit Standards</b> | ISO 9001:2008  |
| <b>Regulatory/Standards Compliance</b>   | EN 420:2003 + A1:2009, EN 421:2010   |
| <b>Packaging</b>                         | 50 gloves per dispenser 10 dispensers per case 500 gloves per case                                       |
| <b>Storage</b>                           | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| <b>Country of Origin</b>                 | China  |
| <b>User Needs Segment</b>                | Robust   |
| <b>Available sizes</b>                   | S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)                                    |
| <b>Anti-static</b>                       | No   |

### PHYSICAL PROPERTIES

|   | Typical Values      |                    | Testing Method       |
|---|---------------------|--------------------|----------------------|
| Length (mm/inches)                      | 270 / 10.6          |                    | ASTM D3767, EN 420   |
| Freedom from Holes (Inspection level I) | 2.5 AQL             |                    | ASTM D5151, EN 455-1 |
| Palm Thickness (mm/mils)                | 0.21 / 8.3          |                    | ASTM D3767, EN 420   |
| Finger Thickness (mm/mils)              | 0.20 / 7.9          |                    | ASTM D3767, EN 420   |
|   | <b>BEFORE AGING</b> | <b>AFTER AGING</b> |                      |
| Ultimate Tensile Strength (MPa)         | ≥ 14                | ≥ 19               | ASTM D412 & D573     |
| Elongation at Break (%)                 | ≥ 500               | ≥ 400              | ASTM D412            |

### ORDERING INFORMATION

| Size                       | S (6.5 - 7) | M (7.5 - 8) | L (8.5 - 9) | XL (9.5 - 10) | XXL (10.5 - 11) |
|----------------------------|-------------|-------------|-------------|---------------|-----------------|
| <b>Ansell Product Code</b> | DFK-608-S   | DFK-608-M   | DFK-608-L   | DFK-608-XL    | DFK-608-XXL     |

For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

#### Asia Pacific Region

Ansell Global Trading Center  
(Malaysia) Sdn Bhd  
T: +603 8310 6688  
F: +603 8310 6699

#### North America Region

Ansell Healthcare Products LLC  
T: +1 800 800 0444  
F: +1 800 800 0445

#### Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133

#### Australia

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

#### Russia

Ansell PYC  
Ten. +7 495 258 13 16

### Performance Standards and Regulatory Compliance



Ansell, <sup>®</sup> and <sup>™</sup> are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2020 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.