


3/8" Drive 6 Point Mid Length Sockets


- Mid-length design for access to fasteners in hard-to-reach places
- Off-corner loading reduces fastener rounding
- Chamfered opening quickly guides fasteners into the socket
- Double line (SAE) and knurled (metric) ring help easily identify standard and metric sockets
- Hard stamped size markings
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

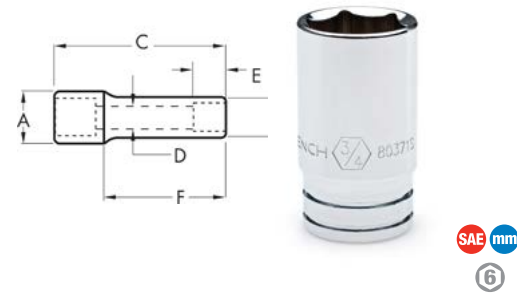

| Cat. No. | SAE/Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Product Weight |
|----------|------------|---------------|-------------------|--------------------|------------------------|------------------------|----------------------|----------------|
| 80363S | SAE | 1/4 in | 0.66 in | 0.39 in | 1.81 in | 0.18 in | 0.35 in | 0.07 lb |
| 80364S | SAE | 5/16 in | 0.66 in | 0.46 in | 1.81 in | 0.20 in | 0.51 in | 0.07 lb |
| 80365S | SAE | 3/8 in | 0.66 in | 0.54 in | 1.81 in | 0.30 in | 0.63 in | 0.08 lb |
| 80366S | SAE | 7/16 in | 0.66 in | 0.62 in | 1.81 in | 0.35 in | 0.63 in | 0.09 lb |
| 80367S | SAE | 1/2 in | 0.74 in | 0.74 in | 1.81 in | 0.43 in | 0.83 in | 0.12 lb |
| 80368S | SAE | 9/16 in | 0.78 in | 0.78 in | 1.81 in | 0.47 in | 0.83 in | 0.13 lb |
| 80369S | SAE | 5/8 in | 0.81 in | 0.86 in | 1.81 in | 0.55 in | 0.83 in | 0.16 lb |
| 80370S | SAE | 11/16 in | 0.87 in | 0.94 in | 1.81 in | 0.59 in | 0.83 in | 0.19 lb |
| 80371S | SAE | 3/4 in | 0.94 in | 1.02 in | 1.81 in | 0.67 in | 0.83 in | 0.22 lb |
| 80372S | SAE | 13/16 in | 0.98 in | 1.09 in | 1.81 in | 0.75 in | 1.02 in | 0.25 lb |
| 80373S | SAE | 7/8 in | 1.08 in | 1.17 in | 1.81 in | 0.79 in | 1.02 in | 0.29 lb |
| 80388S | Metric | 6 mm | 0.66 in | 0.39 in | 1.81 in | 0.16 in | 0.35 in | 0.07 lb |
| 80389S | Metric | 7 mm | 0.66 in | 0.42 in | 1.81 in | 0.2 in | 0.35 in | 0.08 lb |
| 80390S | Metric | 8 mm | 0.66 in | 0.47 in | 1.81 in | 0.24 in | 0.59 in | 0.07 lb |
| 80391S | Metric | 9 mm | 0.66 in | 0.52 in | 1.81 in | 0.28 in | 0.59 in | 0.08 lb |
| 80392S | Metric | 10 mm | 0.66 in | 0.56 in | 1.81 in | 0.31 in | 0.63 in | 0.08 lb |
| 80393S | Metric | 11 mm | 0.66 in | 0.62 in | 1.81 in | 0.35 in | 0.63 in | 0.08 lb |
| 80394S | Metric | 12 mm | 0.70 in | 0.70 in | 1.81 in | 0.39 in | 0.83 in | 0.11 lb |
| 80395S | Metric | 13 mm | 0.74 in | 0.74 in | 1.81 in | 0.43 in | 0.83 in | 0.12 lb |
| 80396S | Metric | 14 mm | 0.78 in | 0.78 in | 1.81 in | 0.47 in | 0.83 in | 0.13 lb |
| 80397S | Metric | 15 mm | 0.81 in | 0.81 in | 1.81 in | 0.51 in | 0.83 in | 0.16 lb |
| 80398S | Metric | 16 mm | 0.81 in | 0.81 in | 1.81 in | 0.55 in | 0.83 in | 0.15 lb |
| 80399S | Metric | 17 mm | 0.87 in | 0.87 in | 1.81 in | 0.59 in | 0.83 in | 0.19 lb |
| 80400S | Metric | 18 mm | 0.91 in | 0.91 in | 1.81 in | 0.63 in | 0.83 in | 0.21 lb |
| 80401S | Metric | 19 mm | 0.94 in | 0.94 in | 1.81 in | 0.67 in | 0.83 in | 0.22 lb |

3/8" Drive 6 Point Deep Length Sockets

- Off-corner loading design reduces fastener rounding
- Chamfered opening quickly guides fasteners into socket
- Hard stamped size markings
- Double line (SAE) and knurled (metric) ring help easily identify standard and metric sockets
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME specifications

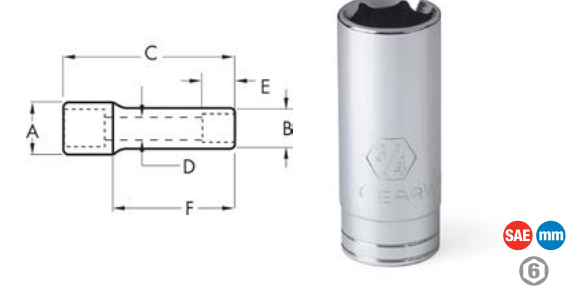

| Cat. No. | SAE/Metric | Fastener Size | Dim. A: Drive End | Dim. B: Wrench End | Dim. C: Overall Length | Dim. D: Bolt Clearance | Dim. E: Wrench Depth | Dim. F: Length to Shoulder | Product Weight |
|----------|------------|---------------|-------------------|--------------------|------------------------|------------------------|----------------------|----------------------------|----------------|
| 80363 | SAE | 1/4 in | 0.661 in | 0.394 in | 2.5 in | 0.217 in | 0.157 in | 1.142 in | 0.11 lb |
| 80364 | SAE | 5/16 in | 0.661 in | 0.461 in | 2.5 in | 0.276 in | 0.197 in | 1.142 in | 0.11 lb |
| 80365 | SAE | 3/8 in | 0.661 in | 0.543 in | 2.5 in | 0.335 in | 0.201 in | 1.142 in | 0.12 lb |
| 80366 | SAE | 7/16 in | 0.661 in | 0.630 in | 2.5 in | 0.335 in | 0.236 in | 1.142 in | 0.13 lb |
| 80367 | SAE | 1/2 in | 0.720 in | 0.685 in | 2.5 in | 0.335 in | 0.287 in | 1.142 in | 0.15 lb |
| 80368 | SAE | 9/16 in | 0.780 in | 0.780 in | 2.5 in | 0.335 in | 0.350 in | 1.142 in | 0.18 lb |
| 80369 | SAE | 5/8 in | 0.866 in | 0.866 in | 2.5 in | 0.335 in | 0.398 in | 1.142 in | 0.24 lb |
| 80370D | SAE | 11/16 in | 0.937 in | 0.937 in | 2.5 in | 0.335 in | 0.398 in | 1.142 in | 0.29 lb |
| 80371 | SAE | 3/4 in | 1.016 in | 1.016 in | 2.5 in | 0.335 in | 0.457 in | 1.142 in | 0.33 lb |
| 80372 | SAE | 13/16 in | 1.094 in | 1.094 in | 2.5 in | 0.335 in | 0.480 in | 1.142 in | 0.40 lb |
| 80373 | SAE | 7/8 in | 1.173 in | 1.173 in | 2.5 in | 0.335 in | 0.520 in | 1.142 in | 0.44 lb |
| 80592 | SAE | 15/16 in | 1.205 in | 1.252 in | 2.5 in | 0.335 in | 0.567 in | 1.142 in | 0.46 lb |
| 80593 | SAE | 1 in | 1.272 in | 1.319 in | 2.5 in | 0.335 in | 0.567 in | 1.142 in | 0.52 lb |
| 80388 | Metric | 6 mm | 0.661 in | 0.508 in | 2.5 in | 0.315 in | 0.197 in | 1.142 in | 0.11 lb |
| 80389 | Metric | 7 mm | 0.661 in | 0.508 in | 2.5 in | 0.315 in | 0.197 in | 1.142 in | 0.11 lb |
| 80390 | Metric | 8 mm | 0.661 in | 0.508 in | 2.5 in | 0.315 in | 0.197 in | 1.142 in | 0.13 lb |
| 80391 | Metric | 9 mm | 0.661 in | 0.508 in | 2.5 in | 0.315 in | 0.197 in | 1.142 in | 0.13 lb |
| 80392 | Metric | 10 mm | 0.661 in | 0.571 in | 2.5 in | 0.335 in | 0.201 in | 1.142 in | 0.13 lb |
| 80393D | Metric | 11 mm | 0.661 in | 0.622 in | 2.5 in | 0.335 in | 0.236 in | 1.142 in | 0.14 lb |
| 80394D | Metric | 12 mm | 0.661 in | 0.654 in | 2.5 in | 0.335 in | 0.260 in | 1.142 in | 0.14 lb |
| 80395 | Metric | 13 mm | 0.740 in | 0.697 in | 2.5 in | 0.335 in | 0.287 in | 1.142 in | 0.16 lb |
| 80396 | Metric | 14 mm | 0.768 in | 0.768 in | 2.5 in | 0.335 in | 0.350 in | 1.142 in | 0.16 lb |
| 80397 | Metric | 15 mm | 0.819 in | 0.819 in | 2.5 in | 0.335 in | 0.350 in | 1.142 in | 0.17 lb |
| 80398 | Metric | 16 mm | 0.866 in | 0.866 in | 2.5 in | 0.335 in | 0.398 in | 1.142 in | 0.17 lb |
| 80399 | Metric | 17 mm | 0.937 in | 0.937 in | 2.5 in | 0.335 in | 0.398 in | 1.142 in | 0.19 lb |
| 80400 | Metric | 18 mm | 0.937 in | 0.937 in | 2.5 in | 0.335 in | 0.421 in | 1.142 in | 0.24 lb |
| 80401 | Metric | 19 mm | 1.004 in | 1.004 in | 2.5 in | 0.335 in | 0.457 in | 1.142 in | 0.25 lb |
| 80406 | Metric | 20 mm | 1.016 in | 1.063 in | 2.5 in | 0.335 in | 0.480 in | 1.142 in | 0.25 lb |
| 80407 | Metric | 21 mm | 1.047 in | 1.094 in | 2.5 in | 0.335 in | 0.480 in | 1.142 in | 0.26 lb |
| 80408 | Metric | 22 mm | 1.114 in | 1.161 in | 2.5 in | 0.335 in | 0.520 in | 1.142 in | 0.27 lb |
| 80409 | Metric | 24 mm | 1.205 in | 1.252 in | 2.5 in | 0.335 in | 0.567 in | 1.142 in | 0.28 lb |