

Wet Dynorbital® Supreme

Air-Powered Random Orbital Sander



SANDING PADS
PAGE 231


ACCESSORIES
PAGE 222

For Polishing and Finishing Flats and Sides

FOR ABRASIVE DISCS
3-1/2" (89 mm), 5" (127 mm)
and 6" (152 mm) dia.
SEE PAGE 275

Deluxe Models

- Include 1/4" diameter x 11' long water line and 1/4" diameter x 10' long air line, both contained in 3/4" diameter overhose.
- Include adjustable "water feed" valves at two locations: one near the water source connection and another at the tool. This allows one valve to be pre-set to your desired flow rate, while the other is utilized as an on/off valve.



3/16" (5 mm) Dia. Random Orbit
For Swirl-Free Finishes

Model 57571 3-1/2" Diameter, 3/16" Orbit

- Includes 54311 Hook-Face Pad.

Model 57573 5" Diameter, 3/16" Orbit

- Includes 54325 Hook-Face Pad.

Model 57575 6" Diameter, 3/16" Orbit

- Includes 54327 Hook-Face Pad.



3/32" (2.5 mm) Dia. Random Orbit
For Ultra-Fine Finishes

Model 57583 5" Diameter, 3/32" Orbit

- Includes 54325 Hook-Face Pad.

Model 57585 6" Diameter, 3/32" Orbit

- Includes 54327 Hook-Face Pad.



Model 57573




Model 57575

Wet Dynorbital® Supreme achieves swirl-free finish.

Connections to Deluxe Tools



Water and Air Source Connections

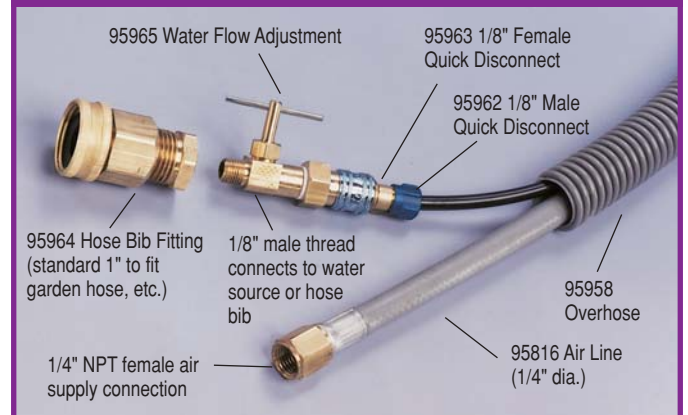

| Model Number | Motor hp (W) | Motor RPM | Pad Dia. Inch (mm) | Sound Level | Maximum Air Flow SCFM (L/Min) | Hose I.D. Size Inch (mm) | Air Inlet Thread | Tool Thread | Weight Pound (kg) | Length Inch (mm) | Height Inch (mm) |
|--------------|--------------|-----------|--------------------|-------------|-------------------------------|--------------------------|------------------|-----------------|-------------------|------------------|------------------|
| 57571 | .24 (179) | 12,000 | 3-1/2 (89) | 74 dB(A) | 16 (453) | 1/4 (6) | 1/4" NPT | 5/16"-24 Female | 2.1 (1.0) | 6 (152) | 3-3/4 (95) |
| 57573 | .24 (179) | 10,000 | 5 (127) | 78 dB(A) | 16 (453) | 1/4 (6) | 1/4" NPT | 5/16"-24 Female | 2.1 (1.0) | 6-1/2 (165) | 3-5/8 (92) |
| 57575 | .24 (179) | 10,000 | 6 (152) | 76 dB(A) | 16 (453) | 1/4 (6) | 1/4" NPT | 5/16"-24 Female | 2.2 (1.0) | 7 (178) | 3-1/2 (89) |
| 57583 | .24 (179) | 10,000 | 5 (127) | 76 dB(A) | 16 (453) | 1/4 (6) | 1/4" NPT | 5/16"-24 Female | 2.1 (1.0) | 6-1/2 (165) | 3-5/8 (92) |
| 57585 | .24 (179) | 10,000 | 6 (152) | 78 dB(A) | 16 (453) | 1/4 (6) | 1/4" NPT | 5/16"-24 Female | 2.2 (1.0) | 7 (178) | 3-1/2 (89) |

Tune-Up Kit: No. 96018 (page 267) • Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)