


Impact Sockets, Chisels & Attachments

EVERYTHING IMPACT®







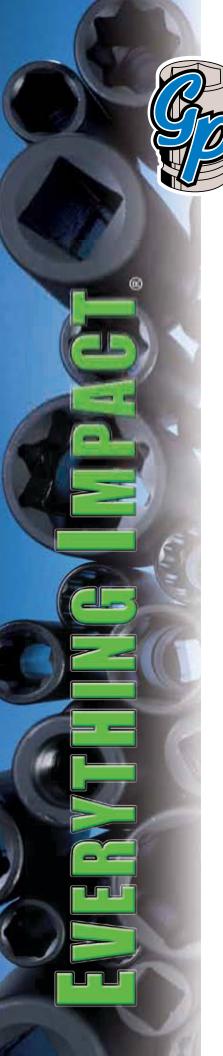

GP is **EVERYTHING IMPACT**®

Grey Pneumatic (GP) through our distributors supplies the world's automotive, industrial, assembly, mining, maintenance, construction, and energy industries with heavy duty, high quality impact and specialty sockets. We carry a complete line of Impact Socket sets and individuals from 1/4" drive thru 2-1/2" and #5 spline drive with hex sizes up to 8". We also offer a large selection of star impact drivers, impact hex drivers, triple square drivers, torque limiting extensions plus Impact chisels and accessories.

GP sockets and tools are made in Taiwan using the highest quality chrome-molybdenum alloy steel and state-of-the-art manufacturing processes and equipment. Thorough and exact heat treatment, as well as rigid quality control, ensures the correct balance of strength and durability to deliver outstanding performance at the most competitive cost.

GP Tools are available through Automotive and Industrial warehouse distributors, tool stores, mobile tool truck dealers, tire equipment and supply warehouses and other sources that service these markets.

GP offers Fast and Reliable service to all of our distributors and their customers.



GP Tools carry a Lifetime Warranty.

All GP Impact Sockets feature the GP "High Torque" Drive

Benefits are:

Increased Strength - Transfers the pressure from the thinnest part of the socket wall toward the thicker section, resulting in increased strength.

Increased Torque - Allows up to 20% more torque to be applied than on standard hex impact sockets.



GP "High Torque" drive offers many benefits.

Easier Access to Tight Areas - The shift in pressure allows us to reduce the socket wall thickness, increasing access to tight areas.

Reduced Wear - Our impact sockets grip the fastener across a broader contact area, reducing the chance of rounding off fasteners.



All GP Sockets feature extra-large size markings for quick identification.



1-1/2" Drive 12-Point Deep Length Impact Sockets








1-1/2" Drive 12-Point - Deep Length - Fractional Sizes



-	3	ï
	П	
	IJ	
1		







Item	12-Point		*Ret	aining D	evices	Dimensions (Inches)					
Number		Shape	P	0	R1	Α	В	C	D	E	
6238D	1-3/16"		4523	4513	6110	3.39	2.20	2.87	0.83	4.53	
6240D	1-1/4"		4523	4513	6110	3.39	2.28	2.87	0.87	4.53	
6242D 6244D	1-5/16" 1-3/8"		4523 4523	4513 4513	6110 6110	3.39 3.39	2.36 2.52	2.87 2.87	0.87 0.87	4.53 4.53	
6246D	1-7/16"		4523	4513	6110	3.39	2.52	2.87	0.07	4.53	
6248D	1-1/2"		4523	4513	6110	3.39	2.60	2.87	1.02	4.53	
6250D	1-9/16"		4523	4513	6110	3.39	2.68	2.87	1.10	4.53	
6252D	1-5/8"		4523	4513	6110	3.39	2.76	2.87	1.10	4.53	
6254D 6256D	1-11/16" 1-3/4"		4523 4523	4513 4513	6110 6110	3.39 3.39	2.87 2.95	2.87 2.87	1.10 1.18	4.53 4.53	
6258D	1-13/16"		4523	4513	6110	3.39	2.99	2.87	1.18	4.53	
6260D	1-7/8"	'	4523	4513	6110	3.39	3.07	2.87	1.26	4.53	
6262D	1-15/16"		4523	4513	6110	3.39	3.15	2.87	1.26	4.53	
6264D	2" 2-1/16"		4523	4513 4513	6110	3.39 3.39	3.23	3.66 3.86	1.34 1.34	5.31 5.51	
6266D 6268D	2-1/10	' '	4523 4523	4513	6110 6110	3.39	3.27 3.39	3.86	1.46	5.51	
6270D	2-3/16"		4523	4513	6110	3.39	3.46	3.86	1.46	5.51	
6272D	2-1/4"		4523	4513	6110	3.39	3.54	4.25	1.54	5.91	
6274D	2-5/16"		4523	4513	6110	3.39	3.66	4.25	1.54	5.91	
6276D 6278D	2-3/8" 2-7/16"		4523 4523	4513 4513	6110 6110	3.39 3.39	3.70 3.78	4.25 4.25	1.54 1.65	5.91 5.91	
6280D	2-1/10		4523	4513	6110	3.39	3.86	4.25	1.65	5.91	
6282D	2-9/16"		4523	4513	6110	3.39	3.94	4.25	1.65	5.91	
6284D	2-5/8"		4523	4513	6110	3.39	4.02	4.25	1.81	5.91	
6286D	2-11/16"		4523 4523	4513 4513	6110 6110	3.39 3.39	4.09 4.17	4.25	1.81	5.91 6.30	
6288D 6290D	2-3/4" 2-13/16"		4523	4513	6110	3.39	4.17	4.65 4.65	1.81 1.93	6.30	
6292D	2-7/8"		4523	4513	6110	3.39	4.33	4.65	1.93	6.30	
6294D	2-15/16"		4523	4513	6110	3.39	4.41	5.04	1.93	6.69	
6296D	3"		4523	4513	6110	3.39	4.45	5.04	1.93	6.69	
6298D 6300D	3-1/16" 3-1/8"		4523 4523	4513 4513	6110 6110	3.39 3.39	4.53 4.65	5.04 5.04	2.09	6.69 6.69	
6302D	3-3/16"		4523	4513	6110	3.39	4.72	5.04	2.09	6.69	
6304D	3-1/4"	' iii	4523	4513	6110	3.39	4.80	5.04	2.09	6.69	
6306D	3-5/16"		4523	4513	6110	3.39	4.88	5.04	2.20	6.69	
6308D 6310D	3-3/8" 3-7/16"		4523 4523	4513 4513	6110 6110	3.39 3.39	4.96 5.04	5.04 5.04	2.20 2.20	6.69 6.69	
6312D	3-1/10		4523	4513	6110	3.39	5.08	5.04	2.32	6.69	
6314D	3-9/16"	' III	4523	4513	6110	3.39	5.16	5.04	2.32	6.69	
6316D	3-5/8"		4523	4513	6110	3.39	5.24	5.04	2.32	6.69	
6318D	3-11/16" 3-3/4"		4523	4513 4514	6110 6111	3.39 3.74	5.31 5.39	5.04	2.40 2.40	6.69	
6320D 6322D	3-3/4 3-13/16"		4524 4524	4514	6111	3.74	5.39	5.43 5.43	2.40	7.09 7.09	
6324D	3-7/8"		4524	4514	6111	3.74	5.67	5.43	2.56	7.09	
6326D	3-15/16"		4524	4514	6111	3.74	5.67	5.83	2.56	7.48	
6328D	4 1/16		4524	4514	6111	3.74	5.79	5.83	2.56	7.48	
6330D 6332D	4-1/16" 4-1/8"		4524 4524	4514 4514	6111 6111	3.74 3.74	5.79 6.06	5.83 5.83	2.68 2.68	7.48 7.48	
6334D	4-3/16"		4524	4514	6111	3.74	6.06	5.83	2.68	7.48	
6336D	4-1/4"	' III	4524	4514	6111	3.74	6.06	5.83	2.83	7.48	
6338D	4-5/16"		4524	4514	6111	3.74	6.18	6.22	2.83	7.87	
6340D 6342D	4-3/8" 4-7/16"		4524 4524	4514 4514	6111 6111	3.74 3.74	6.18 6.18	6.22	2.83 2.83	7.87 7.87	
6344D	4-7/10		4524	4514	6111	3.74	6.46	6.61	3.03	8.27	
6348D	4-5/8"		4524	4514	6111	3.74	6.46	6.61	3.03	8.27	
6352D	4-3/4"		4524	4514	6111	3.74	6.57	6.61	3.03	8.27	

^{*} Retaining Devices Key found on page 129.

