


Polyurethane Recoil Hoses

- Operating temperature: -40 to +38 °C.
- Operating pressure: 8 bar (115 psi) at 24 °C.

Part No.	CPN	mm	NPT	m	m	m
Yellow Hose						
34102	92833375	6	1/4"	3	2.5	0.15
34202	92833383	6	1/4"	6	5	0.31
34302	92833391	6	1/4"	9	8	0.43
35102	92833409	8	1/4"	3	2.5	0.14
35202	92832526	8	1/4"	6	5	0.30
35302	92833417	8	1/4"	9	8	0.46
IR36103	92835172	9.5	1/4"	3	2.5	0.15
IR36203	92835180	9.5	1/4"	6	5	0.34
IR36303	92835198	9.5	1/4"	9	8	0.52
IR36102	92835149	9.5	3/8"	3	2.5	0.15
IR36202	92835156	9.5	3/8"	6	5	0.34
IR36302	92835164	9.5	3/8"	9	8	0.52
IR37102	92835206	13	1/2"	3	2.5	0.16
IR37202	92835214	13	1/2"	6	5	0.38
Blue Hose						
IR36713	88098991	9.5	3/8"	6	5	0.34
IR36715	88099015	9.5	3/8"	9	7.5	0.52

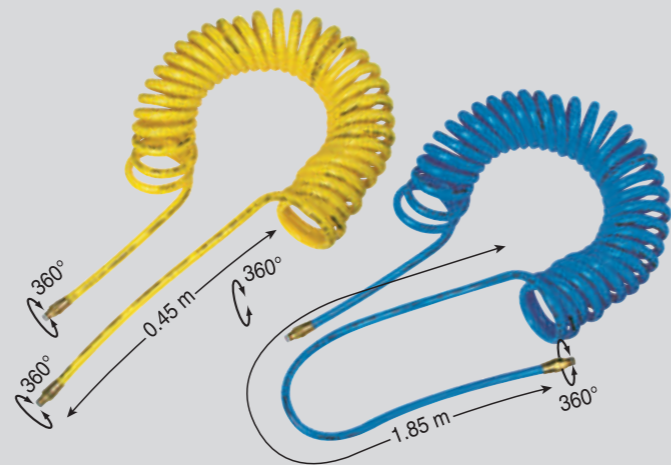

PVC Round Hose, 30 m Coil

- Safety factor 4:1.

Part No.	CPN	mm	mm	Max. operating pressure at 20 °C
RH-6	92545730	6 mm	11 mm	18 bar
RH-8	92536036	8 mm	13 mm	15 bar
RH-10	92536044	10 mm	14 mm	13 bar
RH-12	92536051	13 mm	17 mm	11 bar
RH-16	92536069	16 mm	21 mm	11 bar
RH-19	92536077	19 mm	24 mm	11 bar

Hose clamps

Part No.	CPN	mm	Quantity
CO-0911	56753080	Ø 9 - 11	100
CO-1113	56753098	Ø 11 - 13	100
CO-1315	56753106	Ø 13 - 15	100
CO-1518	56753122	Ø 15 - 18	100
CO-1821	56753148	Ø 18 - 21	100
CO-2225	56753163	Ø 22 - 25	100

Hose Whips

Part No.	CPN	NPT	mm
33104	91486340	1/4"	300
33204	91486357	3/8"	300
33304	91488205	1/2"	300



Safety Blow Guns

- OSHA compliant with outlet pressure reduced to 2 bar for increased operator safety.

Part No.	CPN	Max. air pressure	Description	NPT
94053	91487520	6-7 bar	Brass air screen tip produces conical air stream around direct centre air stream	1/4" BSP
94054	91488775	6-7 bar	For use with blow pipes only (1)	1/4" BSP
94057	91489732	6-7 bar	Tamper-proof vent holes increase total air flow	1/4" BSP
94058	25011222	10 bar	Composite material. Built-in blow pipe	1/4" BSP

(1) Blow pipe, 150 mm long, part no. 94055 (CPN: 91488783) – Blow pipe, 450 mm long, part no. 94056 (CPN: 91488791).



Spring balancers



Model No.	CPN	Load capacity kg	Maximum stroke m	kg
BLD Series – Light-Duty				
BLD-1	92073956	0.4–1.0	1.6	0.6
BLD-2	92073964	1.0–2.0	1.6	0.6
BLD-3	92073972	2.0–3.0	1.6	0.7
BMD Series – Medium-Duty				
BMDS-2	92842152	1.0–2.5	2.0	2.0
BMDS-4	92842160	2.0–4.0	2.0	2.0
BMDS-6	92842178	4.0–6.0	2.0	2.3
BMD-8	92842186	6.0–8.0	2.0	2.5
BMDLN-4	17023730	2.0–4.0	2.5	2.9
BMDLN-6	17023748	4.0–6.0	2.5	3.2
BMDLN-8	17023755	6.0–8.0	2.5	3.5
BMDLN-10	17023763	8.0–10.0	2.5	3.7
BMDLN-12	17023771	10.0–14.0	2.5	4.0
BMDLLN-4 (1)	17023789	2.0–4.0	2.5	3.0
BMDLLN-6 (1)	17023797	4.0–6.0	2.5	3.3
BMDLLN-8 (1)	17023805	6.0–8.0	2.5	3.6
BMDLLN-10 (1)	17023813	8.0–10.0	2.5	3.8
BIDS Series – Intermediate-Duty				
BIDS-7	25015967	4.0–7.0	2.0	5.0
BIDS-10	25015975	7.0–10.0	2.0	5.5
BIDS-14	25015983	10.0–14.0	2.0	5.5
BIDS-18	25015991	14.0–18.0	2.0	6.5
BIDS-22	25016007	18.0–22.0	2.0	6.0
BIDS-26	25016015	22.0–25.0	2.0	6.6
BHD Series – Heavy-Duty				
BHD-15	92841956	10.0–15.0	2.0	10.3
BHD-20	92841964	15.0–20.0	2.0	10.6
BHD-25	92841972	20.0–25.0	2.0	11.2
BHD-30	92841980	25.0–30.0	2.0	11.5
BHD-35	92841998	30.0–35.0	2.0	11.8
BHD-45	92842004	35.0–45.0	2.0	12.4
BHD-55	92842012	45.0–55.0	2.0	12.5
BHD-65	92842020	55.0–65.0	2.0	13.6

(1) Locking type balancer: sharp pull on the wire rope will lock it in position allowing attached load to be manipulated freely – without weight compensation.

Hose Reel Balancers

Model No.	CPN	Load capacity kg	Maximum stroke m	NPT	kg
BHR-8	92073923	0.4 - 0.8	1.3	1/4"	1.5
BHR-15	92073931	0.7 - 1.5	1.3	1/4"	1.5
BHR-25	92073949	1.2 - 2.5	1.3	1/4"	1.5



Grease and Oil

Model No.	CPN	No.	Recommended use	Capacity
Grease				
67-4T	04637336	67	For angle head tools	0.12 L (tube)
67-1 LB	03773009			0.45 kg
105-4T-6	04618930	105	with metal housing	6 tubes of 0.12 L
105-1LB	04279147			0.45 kg
105-8LB	04264875	115	For Impacttools with composite housing	3.60 kg
115-4T	04616157			0.12 L (tube)
115-1LB	04192480			0.45 kg
Oil				
10Z4	03875671	10	For Impacttools, drills, screwdrivers and percussive tools	0.12L (tube)
10P	03875689			0.50 L
10G	03875697	50	For grinders and Impacttools	3.80 L
50P	03875705			0.50 L
50G	03875713			3.80 L



Lubricant Kits

Part No.	CPN	Compatible tools
67-LBK1	04637344	For angle head tools
105-LBK1	04616090	For Impacttools with metal housing
115-LBK1	04616108	For Impacttools with composite housing
VT22-SK1(1)	17028549	Lubricant kit (250 ml of oil + syringe)

(1) Contains: grease 80 g, oil 0.12 L and grease pump.
(2) Note: VT22-T24 spindle lock key is required for oil change.



Grease Guns

Part No.	CPN	Description
P25-228	03026978	For hydraulic-type fittings
R000A2-228	03095015	For flush-type fittings
GTH-1	04616124	For Ingersoll Rand 0.12 l tube of grease