



NINETEEN-FIVE™ MOUNTING/DEMOUNTING TOOL 33199

Nineteen-Five™ bars are specially designed to work on the hub side to make your job easier, faster and safer! New tire bar uniquely designed to work on hubside of wheel — where hub protrudes above rim. Specially designed ends manipulate tire with less effort. Tools are powder coated to protect from rust and corrosion. Forged from 3/4" diameter high-grade carbon steel and heat-treated for long-lasting strength and durability.



BENT END
For mounting and demounting bottom bead



CURVED END
For mounting and demounting top bead

NINETEEN-FIVE™ TIRE MOUNTING & DEMOUNT TOOL SET FOR 19.5" TIRES 33195

Juego de herramientas de montaje y desmontaje de neumáticos de 19.5" Nineteen-Five™
Jeu d'outils de montage - démontage de pneus de 19,5 po Nineteen-Five™

19.5" tires must be mounted and demounted with the wheel's Hub Side Up because the Drop Center of the wheel is closer to the hub! This makes changing the 19.5" tires notoriously difficult because the hub gets in the way of conventional bars and spoons. 19.5" tires are also stiffer with high ply ratings and thick beads. Patented Bead Holder to hold bead on 19.5" aluminum wheels.

Accessories Set Weight: 9.35 Lbs (4.25 kg)

Item No.	Description	Length	Weight	QTY
33199	Tire Mounting/ Demounting Tool	38" (97 cm)	7 lbs (3.2 kg)	2
33196	Patented Bead Holder for 19.5" Aluminum Wheels	7-1/2" (19 cm)	1 lb (.5 kg)	1
31710	Bead Holder for Steel Wheels - Solid Brass	4-1/2" (11.5 cm)	1 lb (.5 kg)	1
31810	Aluminum Wheel Protector - Leather	6" (15 cm)	.35 lbs (.15 kg)	1



31810 PATENTED




31710



Tire Bars For 19.5 Tires & Wheels



Nineteen-Five™ Tool Set: How To Use It On A 19.5 Wheel

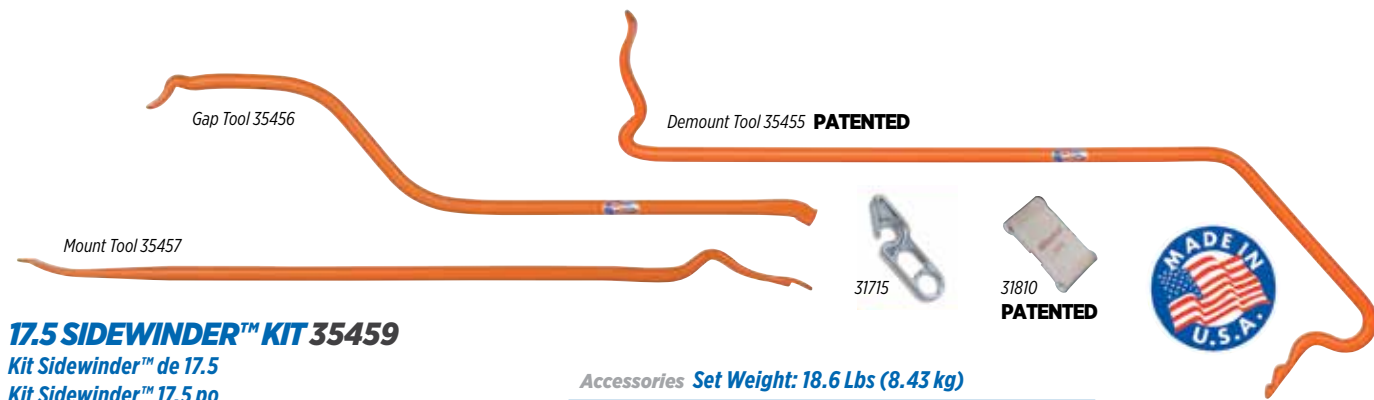

17.5 SIDEWINDER™ KIT 35459

Kit Sidewinder™ de 17.5
Kit Sidewinder™ 17,5 po

The first tire tools designed exclusively for 17.5" tires found on vehicle transporter moving vans and high volume trailers!

- Patent-Pending revolutionary SIDEWINDER™ demount bar demounts the tire from the wheel by pushing against the tire sidewall for leverage
- Unique Gap tool aids in demounting - makes mounting/demounting a 1-man job
- Innovative balanced aluminum bead holder specifically designed to stay in place when mounting the problematic bottom bead on 17.5"

Accessories Set Weight: 18.6 Lbs (8.43 kg)

Item No.	Description	Length	QTY
31715	17.5" Bead Holder	9" (23 cm)	1
31810	Leather Rim Protector	6" (15 cm)	1
35455	Demount Tool	38" (96 cm)	1
35456	Gap Tool	32" (81 cm)	1
35457	Mount Tool	38" (96 cm)	1

35459 set ships in 1 Box, weighing 18.6 lbs, UPS shippable.



31715 PATENTED




17.5 Sidewinder™ Demo Video #35459

TUBELESS TIRE IRONS & SETS

Juegos y barras para llantas sin cámara

Démonte-pneus individuels & en ensemble pour pneus sans chambre à air

Sets provide all irons necessary for a variety of tire changing applications. Use "C" bar with the "B" extension bar for easier use on large, wide-base truck tires. Use on standard and large truck tires, including industrial, farm, buses, and tractors.

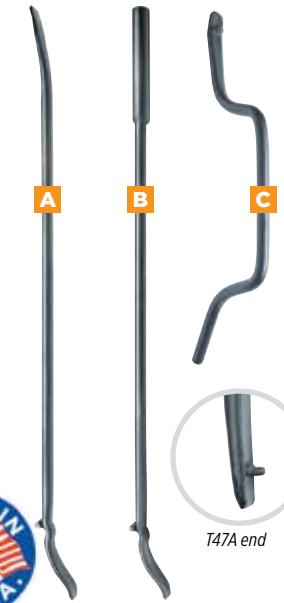

STANDARD TIRE IRON SET 34746 T46

Estándar | Standard

T46 Accessories Set Weight: 12 Lbs (5.4 kg)

Model	Item No.	Description	Length	Stock	Weight
A	T46A	Straight Mount/Demount Tool	36" 91 cm	3/4" 19 mm	4.5 lbs 2 kg
B	T46B	Straight Mount/Demount Tool "B" Extension for T46C	36" 91 cm	3/4" 19 mm	4.5 lbs 2 kg
C	T46C	Offset Mount "C" Bar	22" 56 cm	3/4" 19 mm	3 lbs 1.4 kg

HEAVY DUTY TIRE IRON SET 34846 T47

De alta resistencia | Robuste

T47 Accessories Set Weight: 29 Lbs (13.1 kg)

Model	Item No.	Description	Length	Stock	Weight
A	T47A	Straight Mount/Demount Tool	52" 132 cm	1" 25 mm	11 lbs 5 kg
B	T47B	Straight Mount/Demount Tool "B" Extension for T47C	49-1/2" 126 cm	1" 25 mm	11 lbs 5 kg
C	T47C	Offset Mount "C" Bar	27" 69 cm	1" 25 mm	6.6 lbs 3 kg

TUBELESS TRUCK TIRE MOUNT/DEMOUNT IRONS

Barras para montaje/desmontaje de llantas de camiones sin cámara

Démonte-pneu de montage/démontage pour pneus de camion sans chambre à air

Ken-Tool manufactures the largest and most diverse selection of tire mount/demount irons in the world. From the T45A® and T45AC™ Classic for standard truck tires, to the Serpent™ and Super Serpent™ Tire Changing Systems for wide-base Super Singles, Ken-Tool makes a tire iron for all your tire changing needs. Use on truck, agricultural, and industrial tires. One-piece manufacturing process and design assures long life and superior performance. Heat-treated for strength. Use in pairs. T45A® is a registered trademark of Ken-Tool.



Mount



Demount



Ken-Tool® brings back an old favorite - T45AC Classic™

Ken-Tool's patented designs offer one-piece construction, and assure long life for many tire-changing applications. Tip ends insert easily and will not cut or rip bead or sidewall. These designs make it easier to mount and demount tires without changing the way the tool is used.

Model	Item No.	Length	Stock	Weight
D	T45A®	37" (94 cm)	3/4" (19 mm)	4.6 lbs (2.1 kg)
E	T45AC™	37" (94 cm)	3/4" (19 mm)	4.6 lbs (2.1 kg)
	T45AS	52" (132 cm)	7/8" (22mm)	9 lbs (4.1 kg)
	T45HD	41" (104 cm)	7/8" (22 mm)	7 lbs (3.2 kg)
	T47A	52" (132 cm)	1" (25 mm)	11 lbs (5 kg)



Demount end: Precision-forged angled tip slides between bead and rim easily. Forged design won't slip when demounting the second bead.



Mount end: Precision forged knob grips rim. New design won't slip during tire mounting. Special curve design always grabs the bead edge.



TUBELESS TIRE IRON 34644 T45A-2000KT™ STYLE
Barra de hierro para montaje/desmontaje de neumáticos sin cámara estilo T45A-2000KT™

Démonte-pneu pour pneus sans chambre à air T45A-2000KT™

Length 37" (94 cm) | Stock 3/4" (19 mm) | Weight 5 lbs (2.2 kg)

Design allows for less effort, provides excellent wheel/rim surface contact area for less side to side movement. Improved blade and knob design. Tip on one end for 'grabbing' the rim.

10

MISCELLANEOUS



Eye-catching 15" x 17" full color display card with photos and descriptions!



Convenient mobile base makes positioning for optimum sales a breeze!

TIRE & WHEEL SERVICE CENTERS

Besides featuring Ken-Tool's most popular tire tool products, these new merchandisers attract attention! Each photo has a box so that a 1" x 2.5" barcode price label can be added. The sturdy 12" x 16" freestanding, powder-coated wire rack features bright color graphics to let your customers know they are buying Ken-Tool's professional quality tire tools and lug wrenches. Included at no extra cost is a 3" high 4-wheel dolly with strong and durable caster wheels to enable the loaded rack to be easily moved to different locations and to facilitate floor cleaning. The rack and dolly take up a small 15" x 16" footprint and can be placed on the floor or, without the dolly, on a standard 18" gondola base shelf.



TIRE & WHEEL SERVICE CENTER 36047
 Centro de mantenimiento para ruedas y llantas No. 36047
 Centre de service pneus et roues no 36047

Weight: 125 Lbs (57 kg) Shipped in 5 boxes.

Item No.	Description	Quantity
35110	18" 35110 USA Hickory Tire Kicker	2
32119	24" T19 Straight Tire Spoon	2
33220	30" T20A Curved Tire Spoon	2
34645	37" T45A Tubeless Tire Iron	2
34645C	37" T45AC Classic Tubeless Tire Iron	2
34647	41" T45HD HD Tubeless Tire Iron	2
34747	36" T46A Tubeless Tire Iron	2
35323	16-1/2" T35 HD Tire Hammer, Wood Handle	1
35429	32" TG11E Bead Breaking Wedge, Fiberglass Handle	1
35637	18" 35637 Passenger 4-Way Lug Wrench, SAE/Metric	2
35638	23" 35638 Light Truck/RV 4-Way Lug Wrench, SAE/Metric	2
35595	27" TC95 HD Truck Lug Wrench, Popular Lug Sizes	1
30721	Wire Rack with Roller Base	1
36047-98	Planogram Card with Tie Strap	1

PASSENGER TIRE & WHEEL SERVICE CENTER 36049
 Centro de mantenimiento para ruedas y llanta de automóviles No. 36049
 Centre de service pneus et roues pour occupant no. 36049

Weight: 120 Lbs (54 kg) Shipped in 4 boxes.

Item No.	Description	Quantity
33220	30" T20A Curved Tire Spoon	2
34645	37" T45A Tubeless Tire Iron	2
35429	32" TG11E Bead Breaking Wedge, Fiberglass Handle	1
34645C	37" T45AC Classic Tubeless Tire Iron	2
34747	36" T46A Tubeless Tire Iron	2
35110	18" 35110 USA Hickory Tire Kicker	2
35620	20" T9520 4-Way Lug Wrench	1
35657	23" T57 4-Way Lug Wrench	1
35659	22" T59 4-Way Lug Wrench	2
35663	18" T63 Metric 4-Way Lug Wrench	1
34647	41" T45HD HD Tubeless Tire Iron	2
30721	Wire Rack with Roller Base	1
36047-98	Planogram Card with Tie Strap	1

CONTACT US TO CUSTOMIZE - SALES@KENTOOL.COM

PROFESSIONAL TIRE TOOL AND LUG WRENCH MERCHANDISERS



Comerciantes de llaves y herramientas para llantas profesionales
 Présentoirs de clés à goujon et de démonte-pneus professionnels

Ken-Tool offers a simple, yet effective way to merchandise our top products. With assortment #36046 you get 15 of our best selling tools. Assortment #36045 offers a larger assortment of 20 equally fast-selling tire and wheel service tools. Both assortments come complete with a sturdy, freestanding wire rack (no assembly required). The graphics on the front of the rack let your customer know they're buying professional quality tire tools and lug wrenches from Ken-Tool while the user friendly design of the rack lets you know you found the solution to displaying Ken-Tool products. Both the wire rack and planogram card can be purchased separately.



10 PIECE LUG WRENCH ASSORTMENT WITH RACK 35648
 10 piezas. Surtido de llaves para ruedas con soporte No. 35649
 Jeu de clés à goujon avec râtelier de 10 pièces no 35649

Weight: 50 Lbs (23 kg). Set Includes:

Item No.	Description	Quantity
35620	20" T9520 4-Way Wrench	2
35636	23" T56 Deluxe Metric 4-Way Wrench	1
35657	23" T57 4-Way Lug Nut Wrench	2
35659	22" T59 4-Way Lug Nut Wrench	2
35663	18" T63 Metric 4-Way Wrench	1
35690	25" T90 4-Way Wrench - Truck	2
35649	Empty Display Stand	1



DELUXE TIRE & WHEEL SERVICE CENTER 36045
 Centro de mantenimiento para ruedas y llantas de lujo No. 36045
 Centre de service de luxe pneus et roues no 36045

Weight: 128 Lbs (58 kg). Set Includes:



TIRE & WHEEL SERVICE CENTER 36046
 Centro de mantenimiento para ruedas y llantas No. 36046
 Centre de service pneus et roues no 36046

Weight: 73 Lbs (33 kg). Set Includes:

Item No.	Description	Quantity	Item No.	Description	Quantity
32318	22" TR5 Truck Wrench Handle/Leverage Bar	2	32116	16" Small Tire Mount/Remove Spoon	2
32501	16" TR1 1-1/8" Hex with 13/16" Sq. x 1-1/2 Hex Double-End Wrench	1	33220	30" T20A Curved Tire Spoon	1
32508	16" TR98 1-1/2" Hex x 13/16" Sq. Double-End Wrench	1	33223	30" T23A Truck Lock Ring Removal Tool	1
32509	16" TR9 1-1/4" Hex x 1-1/16" Hex Double-End Wrench	1	34645	37" T45A Truck Tire Mount/Remove Iron	2
32552	16" TRM2 24 mm x 33 mm Double-End Wrench	1	35129	30" T11EH Hickory Replacement Handle (fits 35329)	1
33220	30" T20A Curved Tire Spoon	2	35229	31" TG11EH Fiberglass Replacement Handle (fits 35429)	1
33223	30" T23A Truck Lock Ring Removal Tool	1	35429	31" TG11E Fiberglass Handled Bead Breaking Wedge	1
34645	37" T45A Truck Tire Mount/Remove Iron	2	35620	20" T9520 Economy Passenger Car 4-Way - SAE	1
34647	41" T45HD Truck Tire Mount/Remove Iron	1	35657	23" T57 Professional Gold Passenger Car 4-Way - SAE	1
35229	31" TG11EH Fiberglass Replacement Handle (fits 35429)	1	35659	22" T59 Professional Passenger Car 4-Way - SAE	1
35323	16.5" T35 Hickory Handled Tire Hammer	1	35663	18" T63 Economy Passenger Car 4-Way - Metric	1
35429	32" TG11E Fiberglass Handled Bead Breaking Wedge	1	35690	25" T90 Light Truck 4-Way, Welded - SAE	1
35690	25" T90 Light Truck 4-Way, Welded - SAE	2	35695	27" T95 Heavy-Duty Truck 4-Way, Drop-Forged - SAE	1
35595	27" TC95 Heavy-Duty Truck 4-Way, Drop-Forged - SAE	2	30720	Wire Rack	1
35924	46" T24B Slide-Action, Impact Bead Breaker	1	36046-10	Planogram Card with Tie Strap	1
30720	Wire Rack	1			
36045-10	Planogram Card with Tie Strap	1			

OSHA TIRE SERVICE CHARTS 39998

Cuadros de servicio de neumáticos OSHA | Diagrammes d'entretien des pneus OSHA



Weight: 1 lb (.5 kg) 24" x 70" High Quality posters. Suitable for wall mounting in service area per OSHA 29 CFR 1910.77. 3 poster set includes (A) Demounting & Mounting Procedures for Tube-type Truck & Bus Tires Chart (OSHA 3402 10R-11), (B) Demounting & Mounting Procedures for Tubeless Truck & Bus Tires Chart (OSHA 3401 10R-11) (C) Multi-Piece Rim Matching Chart (OSHA 3403 10R-11)

