



**INDUSTRIAL WHEEL LOCK RING SET 32129**

*Juego de anillos de traba para ruedas industriales  
Jeu d'anneaux verrouilleurs de roues industrielles*



Weight: 3.3 Lbs (1.5 kg).

Specially designed to remove & replace lock rings on multi-piece industrial forklift wheels. Removing and replacing lock rings on multi-piece industrial wheels presents its own set of unique problems – these tools are specifically designed to make that job easier, faster, and safer. Helps prevent injury – easier to keep hands safely outside of press cage! Powder coated to protect from rust and corrosion; bright orange color helps prevent lost tools. Forged from high-grade carbon steel and heat-treated for long-lasting strength and durability. **PATENTED.**

Item No.	Description	Length	Stock	Weight
A 32130	Mount Demount Tool	15-3/4" (40 cm)	5/8" (16 mm)	1.8 lbs (.8 kg)
B 32131	Demount Prep Tool	15-1/2" (40 cm)	5/8" (16 mm)	1.5 lbs (.7 kg)

Separator end separates split ring from solid flange ring

Pry-out end reaches behind slotted end of split ring to pry it out and over the flange of the wheel

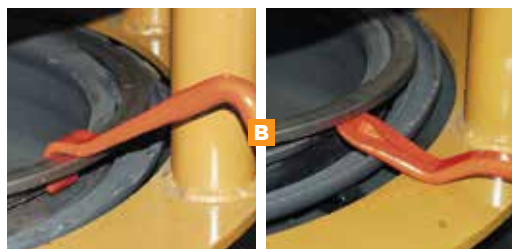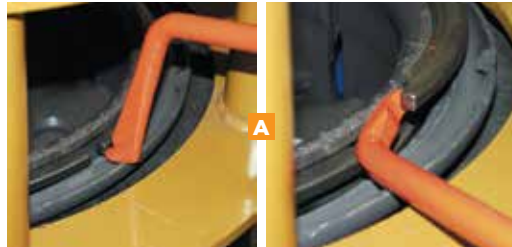

Mount end is used to mount split ring

Demount end lifts and fully demounts split ring



Industrial Wheel Lock Ring Tool Set #32129



**LOCK RING TOOLS**

*Herramientas para anillos de seguridad  
Outils pour anneau verrouilleur*

These tools are designed to remove most truck lock rings. A must-have for anyone mounting or demounting multi-piece rims. Use in pairs.



**C TRUCK LOCK RING REMOVER 32123 T23®**

*Desmontador para anillos de seguridad para camiones  
Dégageur d'anneau verrouilleur pour camions*  
Length: 24" (61 cm) Stock: 11/16" (17.5 mm) Weight: 2.4 lbs (1 kg)

Designed for smaller diameter wheels.

**D TRUCK LOCK RING REMOVER 33223 T23A®**

*Desmontador para anillos de seguridad para camiones  
Dégageur d'anneau verrouilleur pour camions*  
Length: 30" (76 cm) Stock: 11/16" (17.5 mm) Weight: 3.1 lbs (1.4 kg)

Designed for smaller diameter wheels.

**E COMBINATION RIM/RING TOOL 33224 T23B**

*Herramienta para combinación de llantas/anillos  
Deux en un pour jante/anneau*  
Length: 23-1/2" (60 cm) Stock: 11/16" (17.5 mm) Weight: 2.4 lbs (1 kg)

Flat tapered end ideal for all around ring and rim work.

**F RIM LOCK TOOL 32125 T25**

*Herramienta para anillos de seguridad de llantas  
Bloque-talons*  
Length: 18" (46 cm) Stock: 11/16" (17.5 mm) Weight: 1.8 lbs (.8 kg)

For servicing wide base rims.

**G SPECIAL LOCK RING TOOL 32127 T27**

*Herramienta para anillos de seguridad especiales  
Outil spécial pour anneau verrouilleur*  
Length: 18" (46 cm) Stock: 11/16" (17.5 mm) Weight: 1.8 lbs (.8 kg)

Long tapered curved end for continuous side rings.

**H LOCK RING TOOL 32128 T27A**

*Herramienta para anillos de seguridad  
Outil pour anneau verrouilleur*  
Length: 18" (46 cm) Stock: 11/16" (17.5 mm) Weight: 1.8 lbs (.8 kg)

Removes continuous side rings on two-piece truck rims.

**I HEAVY-DUTY LOCK RING TOOL 34648 T48A**

*Herramienta para anillos de seguridad de alta resistencia  
Outil robuste pour anneau verrouilleur*  
Length: 37" (94 cm) Stock: 3/4" (19 mm)  
Weight: 4.6 lbs (2.1 kg)



Use for multi-piece wheels, especially hub type.

**TIRE MOUNT / DEMOUNT LUBRICANTS**

*Lubricantes para montaje/desmontaje de neumáticos  
Lubrifiants de montage & démontage de pneus*

Professional grade lubricants make tire mounting and demounting easier and more efficient.



**BEAD-EZE® TIRE LUBRICANT 6 PK. 35847 T147A**

*Lubricante para neumáticos Bead-Eze®  
Lubrifiant de pneu Bead-Eze®*

Penetrating water-based lubricant for tire mounting/demounting, can be diluted for leak detection, six-pack.

54 lbs (24.5 kg)



**BEAD-EZE® TIRE LUBRICANT 1 GAL. 35847S T147A**

*Lubricante para neumáticos Bead-Eze®  
Lubrifiant de pneu Bead-Eze®*

Penetrating water-based lubricant for tire mounting/demounting, can be diluted for leak detection.

9 lb. (4.1 kg)



**DETECTO MIST LEAK LOCATOR 35805 D105A**

*Localizador de fugas Detecto Mist  
Localisateur de fuites Detecto Mist*

Spray on tire to instantly detect air leaks, concentrated formula dilutes with water.

One Quart 2.3 lb. (1 kg)



**TIGER PASTE LUBRICANT 35837 35839**

*Lubricante Tiger Paste  
Lubrifiant Tiger Paste*

7.5 lb. (3.4 kg)



**ULTRA LUBE LUBRICANT 35839 35839**

*Lubricante Ultra Lube  
Lubrifiant Ultra Lube*

25 lb. (11.4 kg)



**WHITE TIRE PASTE LUBRICANT 35848 35848**

*Lubricante Blanco Paste Lube  
Lubrifiant Blanc Paste Lube*

8 lb. (3.6 kg)



**HEAVY PASTE LUBE LUBRICANT 35840 35840**

*Lubricante Denso Paste Lube  
Lubrifiant Dense Paste Lube*

25 lb. (11.4 kg)

**LUBRICANT APPLICATORS**

*Aplicadores de lubricantes  
Applicateurs de lubrifiant*



**BEAD LUBRICANT SWAB 30511 B11**

*Estropajo para lubricante de talones  
Écouvillon pour lubrifiant de talon*

Durable cotton applicator quickly holds and applies lube, twisted wire construction and wood handle.

Length: 12" (30.5 cm) Weight: 3 oz (.1 kg)



**EURO STYLE LUBE BRUSH 30512**

*Pincel para lubricante estilo europeo  
Brosse de lubrification style européen*

Designed to the ideal angle to fit between the tire bead and rim. Imported.

Length: 11" (28 cm) Weight: 10 oz (.3 kg)



**TIRE SPREADERS**

*Separadores de llantas  
Écarte-pneus*



**TIRE SPREADER WITH LOCK PIN 31551 T51**

*Separador de llanta con pasador de bloqueo  
Écarte-pneu avec goupille de sécurité*

Spread Capacity: 4"-6" (10-15 cm) Weight: 3.9 lbs (1.7 kg) Imported.



**RATCHET ACTION TRUCK TIRE SPREADER 31554 T54**

*Separador de llantas para camiones Ratchet Action  
Écarte-pneu à rochet pour camions*

Spread Capacity: 3-1/2" - 14" (9 - 36 cm) Weight: 7.3 lbs (3.3 kg)





# 05

## BALANCING & BEAD TOOLS




### BALANCING BEADS

Complete wheel end balancing


Ken-Tool Balancing Beads have you covered from motorcycle, passenger, light truck, off-road and class 5-8 vehicles. Our easy-to-use drop in bag saves time and money on new tire installation and can be injected through the valve stem to completely balance the axle end on existing vehicles without dismounting the tire and wheel. Memory technology keeps the beads stabilized, providing a completely balanced axle end in all wheel positions. Ken-Tool Balancing Beads balance the complete axle end...the tire, the wheel and all the moving components of the wheel assembly. TPMS compatible.



LEAD FREE,  
ENVIRONMENTALLY  
FRIENDLY



EASY TO USE,  
DROP IN BAG OR  
INSTALL THROUGH  
VALVE STEM



SPECIALY  
COATED KEN-TOOL  
BALANCING BEADS  
REPEL MOISTURE  
AND AVOID  
CLUMPING

Item No.	Description	Amount
31600	Bead Injection Tool for easy installation into the valve stem	
31601	1 oz bags	Case of 160
31602	2 oz bags	Case of 128
31603	3 oz bags	Case of 96
31604	4 oz bags	Case of 92
31606	6 oz bags	Case of 64
31608	8 oz bags	Case of 52
31610	10 oz bags	Case of 40
31612	12 oz bags	Case of 36
31614	14 oz bags	Case of 32
31616	16 oz bags	Case of 28

## 05 BALANCING & BEAD TOOLS



### PNEUMATIC BEAD EXPANDERS

Expansores neumáticos de llantas  
Tubes d'extension de talon pneumatiques

Expanders fit most bias ply tubeless tires. A pliable neoprene rubber tube is encased in a tough, long-lasting nylon cover. Expanders slip easily over tire and withstand contact with oil, grease, solvents, and acids. Expands passenger and light truck beads by compressing tread. **T131** is for smaller tires, **T132** for belted bias ply tires and steel belted radials, and **T133** for standard bias ply tires. All models feature an over-pressure relief valve and external pressure quick release valve for safe operation.

Model No.	Item No.	Min/Max Tire OD	Tube Diameter	Weight
A	T131	10 - 22" (26 - 56 cm)	2-1/4" (6 cm)	2 lbs (.9 kg)
	T132	24 - 34" (61 - 86 cm)	2-1/4" (6 cm)	2.8 lbs (1.3 kg)
	T133	22 - 32" (60 - 81 cm)	3/4" (2 cm)	.75 lbs (.3 kg)
	T134	13 - 26" (33 - 70 cm)	2-1/4" (6 cm)	2.7 lbs (1.2 kg)



### TIRE BEAD SEATERS

Calzador para llantas  
Cordons de talon de pneus

One-piece rubber tube for mounting hard-to-seat radial, bias-belted, or conventional truck tires. As tire is inflated, the lubricated bead seater forms a seal between the rim and tire, allowing the air pressure to force the beads into the rim flange. As proper pressure is reached, the bead seater slides out and over the rim. Use bead lubricant with bead seaters.

Item No.	Fits Rim Sizes	Weight	
<b>Passenger / Light Truck (Camión liviana/vehículo de pasajeros / Automobile/camion léger)</b>			
31446	14-15" (36 - 38 cm)	1.5 lbs (.7 kg)	
<b>Truck (Camión   Camion)</b>			
D	31437	16-1/2" to 17-1/2" (42 to 45 cm)	2 lbs (.9 kg)
	31438	19-1/2" (50 cm)	2.3 lbs (1 kg)
	31439	22-1/2" to 24-1/2" (57 to 62 cm)	2.3 lbs (1 kg)



### BEAD SEATING TOOL

Outil de portée de talon  
Herramienta para calzado de talone

Used on Auto, ATV, and Truck Tires. Designed for use on tires up to 24-1/2 diameter. Digital air pressure gauge and safety release valve included for operator convenience and safety. Plastic nose clip protects chrome and alloy wheels; replacements available.

Item No.	Description	Dimensions	Weight	
B	31444	Steel	25 1/2" x 16 1/2" x 11 1/2" (648 X 419 x 292 mm)	26 lbs / 12 kg
C	31445	Aluminum	25 1/2" x 17" x 11 1/2" (648 X 431 x 292 mm)	11 lbs / 5 kg



### EASY-LIFT™ BEAD SEATING STAND

Soporte para calzado de talón Easy-Lift™  
Poste de portée de talon Easy-Lift™

Safety First! ERGONOMIC: Reduces back strain while handling 22.5" tubeless tire & wheel assemblies. Aligns beads concentrically on wheel for improved ride & longer tire life. Portable for field service, or can be bolted to the floor. Made of high grade steel. Length: 24" high x 26" wide x 27" long. **PATENTED.**

Model No.	Item No.	Description	Weight
T116	36016	Standard Crown for 8-3/4" diameter hubs	36 lbs (16.4 kg)
T117	36017	Large Crown for 11" Euro hubs	37 lbs (16.8 kg)




EasyLift™  
Bead Seating Stand



### BEAD SEATING TOOL 36030

Outil de portée de talon  
Herramienta para calzado de talone

The Ken-Tool C-Beast lifts the weight of the wheel off the bottom area of the bead of a standing tire/wheel assembly, in order to easily ensure the concentric seating of the bead on a standing Super Single assembly.

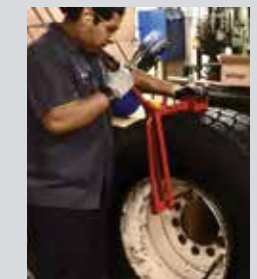

Specially designed for use with most super single tires.



### WHITE TIRE PASTE 35848

Lubricante Blanco Paste Lube  
Lubrifiant Blanc Paste Lube

Premium tire mounting/demounting lubricant dries tacky to prevent rim slippage, with rust retardant.

8 lb. (3.6 kg)