


For use with non-corrosive fluids, automotive, agricultural and industrial fluids such as motor oil, transmission fluid, gear oil, engine coolant, silicone oils, and more (not suitable for gasoline).

Model G401 lever-action barrel pump

Fits 16 to 55 gallon (60,6 to 208 liter) drums. Delivers 10 oz. (283 ml) per stroke. Includes standard bung bushing. Designed for transfer of petroleum-based, non-corrosive liquids. Curved metal spout features threads to fit all garden hoses.

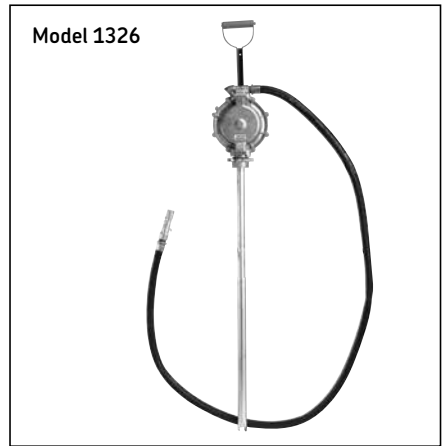

Model 1326

Model 1326 diaphragm action

Neoprene seals resist wear from abrasive fluids. Double-acting diaphragm delivers 1 gallon/8 strokes (3,8 liter/8 strokes). 8 ft. (2,4 m) hose with discharge nozzle.

Model 1335

This close tolerance pump utilizes brass rings for extreme durability and expanded fluid compatibility. Telescoping pick-up tube with standard 2 in. bung. Bung opening tool built into pump head to open sealed refinery container. 6 ft. (1,8 m) hose with discharge nozzle forward facing, two position handle.



Model 1335

Model 1340 lever-action barrel pump

Extended pump body improves top-of-barrel clearance while providing excellent flow per stroke [14.0 fl oz. (414 ml) minimum per stroke].

- Removable non-drip spout allows for threaded hose connection
- Telescoping pick-up tube
- Two-tier threaded bung fits standard 2 and 1.5 in. (50,8 and 38,1 mm) drums



Model 1340



Model G401

Manually operated transfer pumps

Model	Drum size		Bung bushing NPT (m)	Output per stroke		Fluid compatibility
	gal.	liter		oz.	liter	
1326	16 to 55	60 to 208	2	16	0,47	Motor oil, transmission fluid, fuel oils, engine coolant, diesel, kerosene, hydraulic oil
1335*	16 to 55	60 to 208	2	8.5	0,25	Motor oil, transmission fluid, gear oil, fuel oils, engine coolant, diesel, kerosene, hydraulic oil
1340*	16 to 55	60 to 208	2 and 1.5	14	0,41	Motor oil, transmission fluid, gear oil, fuel oils, engine coolant, diesel, kerosene, hydraulic oil
G401*	16 to 55	60 to 208	2	10	0,28	Motor oil, transmission fluid, gear oil, fuel oils, engine coolant, diesel, kerosene, hydraulic oil

*⚠️ **WARNING** California Proposition 65: Cancer and reproductive harm. www.P65Warnings.ca.gov



Low-capacity drains

Low-capacity drains are available in 8 gallon (30 liter) or 18 gallon (68 liter) models with high-density polyethylene reservoirs. They have a portable upright configuration commonly used for collecting fluids under lift-mounted vehicles. Both models include an integrated oil filter drain shelf and funnel designed to include an added raised area to act as a splashguard. Both can be used with an optional cam-lock drainage kit for use with standard cam lock diaphragm pump systems.

Features

- Available in two sizes
- Durable, polyethylene reservoir construction
- Splashguard to catch overspray
- Integrated oil filter drain shelf
- Multiple reservoir evacuation options
- Long-lasting casters for ease of movement

Model 3518 18 gallon (68 liter) low-capacity drain

Complete drain kit including 18 gallon (68 liter) polyethylene reservoir, drain bowl, drain spigot and a standard bung port and is adjustable from 40 to 77 in. (101 to 195 cm).

Model 3508 8 gallon (30 liter) low-capacity drain

Complete drain kit including 8 gallon (30 liter) polyethylene reservoir, drain bowl and is adjustable from 36 to 65 in. (91 to 165 cm).

Low-capacity drain technical data

Model	3518	3508
Capacity	18 gal. (68 liter)	8 gal. (30 liter)
Bowl diameter	17.5 in. (444.5 mm)	17.5 in. (444.5 mm)
Reservoir included	Yes	Yes
Wheels (qty. 4) – swivel caster	2.5 in. (63.5 mm)	2.5 in. (63.5 mm)
Minimum height	40 in. (1 016 mm)	36 in. (914 mm)
Maximum height	77 in. (1 956 mm)	65 in. (1 651 mm)
Size tank	16 × 15 × 22 in. (406 × 381 × 559 mm)	13 × 14 × 16 in. (330 × 356 × 406 mm)

Optional accessories

Model	Name	Description	Compatible models
820036	Tool caddy	Optional, sold separately	3608, 3618
820039	Cam lock drain kit	Optional, sold separately	3608, 3618
820015	Drain pan	Optional, sold separately.	3608, 3618
820016	37.5 × 24.625 in. (953 × 625 mm) drain pan	Optional, sold separately	3608, 3618
1340	Hand pump	Optional, sold separately	3618
G402	Rotary pump	Optional, sold separately	3618