

**Model 1410**

110 V “smart” charger recharges batteries in less than one hour and recognizes battery condition when not in use. For use with both Lincoln model 1401 (14.4 V NiCad) and model 1801 (18 V NiCad) battery packs.

**Model 1815A**

One hour charger for use in vehicles and heavy equipment using 12 or 24 V DC outlets. For use with both Lincoln model 1401 (14.4 V NiCad) and model 1801 (18 V NiCad) battery packs.

**Model 1210**

110 V one-hour fast charger for use with battery pack model 1201. 6 ft. (1,8 m) cord; UL/ULC listed.

**Model 1215**

One hour charger for use in vehicles and heavy equipment using 12 V DC outlets. For use with 12 V NiCad battery model 1201.

**Model 1215A**

One hour fast charger for use in vehicles and heavy equipment using 12 or 24 V DC outlets. For use with 12 V NiCad battery model 1201.

**Model 1414**

Shoulder strap for hands-free movement from job to job (14.4 and 18 V PowerLubers only).

**PowerLock coupler**

**Model 5900**

Lever-action coupler for quick attachment and release. Reverse jaw design holds the fitting securely to the seat for single-handed operation. Durable, all-steel construction with flexible rubber sleeve.



**PowerLuber accessories – whip hoses**

Model	Description		Thread size		Maximum pressure Working	
	in.	cm	Inlet UNEF	Outlet NPT (m)	psi	bar
1218	18	46	7/16	1/8	7 500	517
1224	24	61	7/16	1/8	7 500	517
1230	30	76	7/16	1/8	7 500	517
1236	36	91	7/16	1/8	10 000	689
1248HP	48	122	7/16	1/8	10 000	689

# Hoses for grease guns and air-operated control valves

## Premium extensions for grease guns and air-operated control valves

Model	Description		Thread size	Maximum pressure	
	in.	mm	NPT (m)	Working	
–	in.	mm	in.	psi	bar
5812	12	305	1/8	4 500	310
5818	18	457	1/8	4 500	310
5861	36	914	1/8	4 500	310




Strategically placed coil spring provides nonslip, push-pull grip and prevents accidental kinking which could cause hose ruptures.

## Hose extensions for manually operated grease guns, packaged

Model	Description		Thread size		Maximum pressure		Burst pressure	
	in.	mm	inlet NPT (m)	outlet NPT (m)	Working		psi	bar
–	in.	mm	in.	in.	psi	bar	psi	bar
71512	12	305	1/8	1/8	3 000	207	12 000	827
71518	18	457	1/8	1/8	3 000	207	12 000	827
G212	12	305	1/8	1/8	3 500	241	14 000	965
G212S*	12	305	1/8	1/8	3 500	241	14 000	965
G218	18	457	1/8	1/8	3 500	241	14 000	965
G218S*	18	457	1/8	1/8	3 500	241	14 000	965

\* With spring guard

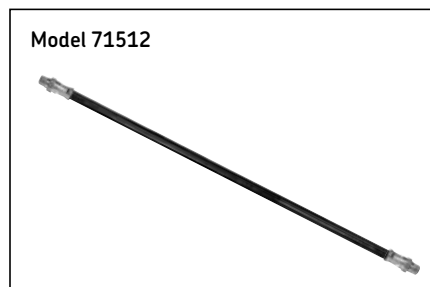


## Extensions for manually operated grease guns, bulk (unpackaged)

Model	Description		Thread size	Maximum pressure		Burst pressure	
	in.	mm	NPT (m)	Working		psi	bar
–	in.	mm	in.	psi	bar	psi	bar
75912CL	12	305	1/8	3 000	207	12 000	827
75918CL	18	457	1/8	3 000	207	12 000	827
75924CL	24	610	1/8	3 000	207	12 000	827
75936CL	36	914	1/8	3 000	207	12 000	827

# Whip hose extensions for PowerLubers

## PowerLuber whip hoses

Model	Description		Thread size		Maximum pressure	
	in.	mm	inlet UNEF	outlet NPT (m)	Working	
–	in.	mm	in.	in.	psi	bar
1218	18	457	7/16	1/8	7 500	517
1224	24	610	7/16	1/8	7 500	517
1230	30	762	7/16	1/8	7 500	517
1236	36	914	7/16	1/8	10 000	689
1248HP	48	122	7/16	1/8	10 000	689

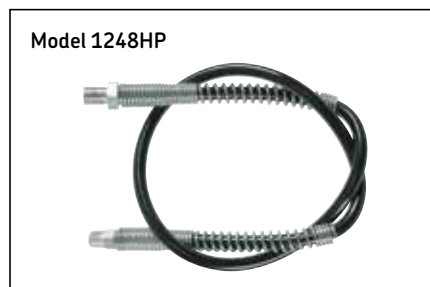

**Model 1230**  
These hoses only fit Lincoln battery-operated PowerLuber grease guns and model 1162 air-operated grease guns.