

# Heavy-duty lever-type grease guns

### Model 1142

Designed for rough treatment on the job with a cast iron pump head, precision fit plunger and extra heavy follower spring.

### Model 1147

Same as model 1142 with 18 in. (457 mm) whip hose and coupler.

### Model 1148

Premium version of our popular model 1142. This pump head includes dual grease inlet ports that provide the user the option of high pressure or high volume delivery. The tool also includes a comfortable vinyl grip and vent valve for purging air.

### Model 1151

Same as model 1142 but holds 21 oz. (595 cm<sup>3</sup>) bulk.

### Model G100 lever action


Features non-slip grip, steel block head. Uses standard 14 oz. (397 g) grease cartridge.

### Model G103 3 oz. (85 g) lever action

The perfect tool for low-volume greasing applications. Compact and lightweight, it's ideal for do-it-yourself auto repair, lawn and garden, ATV, marine, motorcycles, trailers and more. Unlike other 3 oz. (85 g) models, the G103 incorporates the traditional lever-action design providing better handling and much higher output pressure.

#### Key features:

- Lever-action design produces 6 000 psi (414 bar), far exceeding mini pistol-grip models
- Cast aluminum head, powder-coated barrel, comfortable vinyl grip
- Uses 3 oz. (85 g) cartridge or can be hand packed or bulk filled
- Conveniently stores in tool box or tray
- Optional 12 and 18 in. (305 and 457 mm) flex hoses available separately
- Jam-proof handle mechanism
- Replaceable hydraulic grease coupler

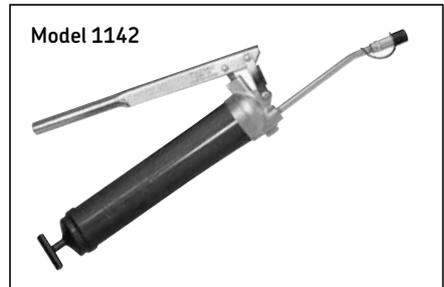

### Lever-type grease guns

Model	Capacity size		Cartridge		Extension	Coupler	Size <sup>1)</sup>	
	Bulk							in.
	oz.	grams	oz.	grams	–	–		
1142	16	454	14.5	411	62028, 6 in. (152 mm)	5852	21 3/4	552
1147	16	454	14.5	411	71518, 18 in. (457 mm) hose	5852	21 3/4	552
1148*	16	454	14.5	411	62028, 6 in. (152 mm)	5852	21 3/4	552
1151	21	595	14.5	411	62028, 6 in. (152 mm)	5852	24 1/2	622
G100	16	454	14	397	5 in. (127 mm)	G300	19	482
G103	3.2	90	3	85	62028, 6 in. (152 mm)	G300	9 1/2	240

<sup>1)</sup> Includes rigid extension  
 Specifications: output 1 oz. (28 cm<sup>3</sup>) per 33 strokes using No. 1 grease at 70 °F (21 °C). Barrel diameter 2 1/4 in. (57 mm)  
 \*⚠️ WARNING California Proposition 65: Cancer and reproductive harm. www.P65Warnings.ca.gov