

Hoses for grease guns and air-operated control valves

Premium extensions for grease guns and air-operated control valves


Model	Description		Thread size	Maximum pressure	
	in.	mm	NPT (m)	Working	
–	in.	mm	in.	psi	bar
5812	12	305	1/8	4 500	310
5818	18	457	1/8	4 500	310
5861	36	914	1/8	4 500	310



Strategically placed coil spring provides nonslip, push-pull grip and prevents accidental kinking which could cause hose ruptures.

Hose extensions for manually operated grease guns, packaged

Model	Description		Thread size		Maximum pressure		Burst pressure	
	in.	mm	inlet NPT (m)	outlet NPT (m)	Working		psi	bar
–	in.	mm	in.	in.	psi	bar	psi	bar
71512	12	305	1/8	1/8	3 000	207	12 000	827
71518	18	457	1/8	1/8	3 000	207	12 000	827
G212	12	305	1/8	1/8	3 500	241	14 000	965
G212S*	12	305	1/8	1/8	3 500	241	14 000	965
G218	18	457	1/8	1/8	3 500	241	14 000	965
G218S*	18	457	1/8	1/8	3 500	241	14 000	965

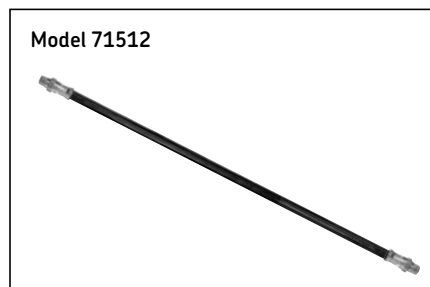

* With spring guard

Extensions for manually operated grease guns, bulk (unpackaged)


Model	Description		Thread size	Maximum pressure		Burst pressure	
	in.	mm	NPT (m)	Working		psi	bar
–	in.	mm	in.	psi	bar	psi	bar
75912CL	12	305	1/8	3 000	207	12 000	827
75918CL	18	457	1/8	3 000	207	12 000	827
75924CL	24	610	1/8	3 000	207	12 000	827
75936CL	36	914	1/8	3 000	207	12 000	827




Whip hose extensions for PowerLubers

PowerLuber whip hoses

Model	Description		Thread size		Maximum pressure	
	in.	mm	inlet UNEF	outlet NPT (m)	Working	
–	in.	mm	in.	in.	psi	bar
1218	18	457	7/16	1/8	7 500	517
1224	24	610	7/16	1/8	7 500	517
1230	30	762	7/16	1/8	7 500	517
1236	36	914	7/16	1/8	10 000	689
1248HP	48	122	7/16	1/8	10 000	689

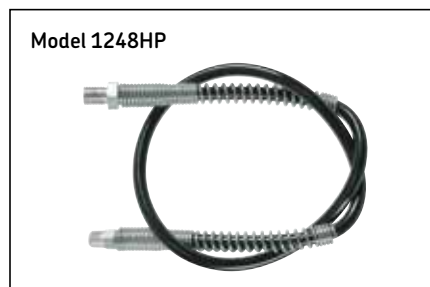

Model 1230
These hoses only fit Lincoln battery-operated PowerLuber grease guns and model 1162 air-operated grease guns.

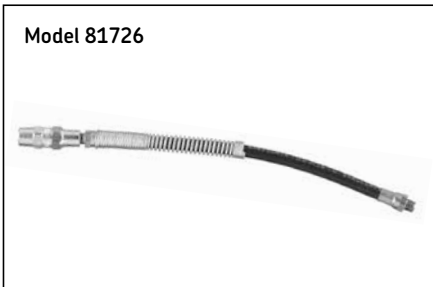

Assemblies for standard hydraulic fittings


Model	Whip hose		Coupler	Thread size NPT (m)	Maximum pressure Working	
	in.	mm			psi	bar
–	–	–	–	in.	psi	bar
81725	5818	18	457	5845	1/8	4 500 310
81726	5812	12	305	5845	1/8	4 500 310
81795*	5812	12	305	5845	1/8	4 500 310

* Includes model 81980 locking sleeve



Assemblies for button-head couplers with swivel

Model	Whip hose		Coupler	Thread size NPT (m)	Maximum pressure Working	
	in.	mm			psi	bar
–	–	–	–	in.	psi	bar
3029	5812	12	305	80933/large	1/8	4 000 276
3034	5812	12	305	81458/standard	1/8	4 000 276
3055	5861	36	914	81458/standard	1/8	4 000 276
3056	5861	36	914	80933/large	1/8	4 000 276

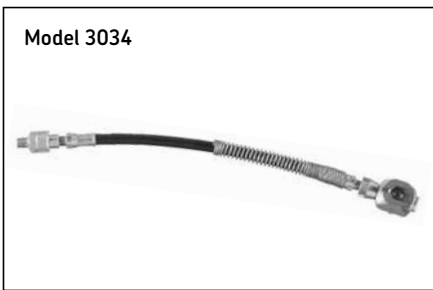

Flexible and rigid extension adapter

Model 5858

Maximum working pressure 5 000 psi (345 bar). Allows operator to switch from flexible to rigid extension with one hand. Overall length 13 in. (330 mm). 1/8 in. NPT (m). For use on hand guns or air operated grease control valves.

WARNING!
Whip hose models 3029, 3034, 5812, 5818, 5861, 81725, 81726, 81795

Install as shown

Control valves – grease

Lincoln control valves, meters and accessories provide the durability and precision you need for your lubrication systems.

Model 740 heavy-duty high-pressure

- 7 500 psi (517 bar) maximum operating pressure
- Precision-machined, all steel handle, body and guard bracket provides durability and longevity
- Unique, precision control inlet check valve provides ease of handle operation even with increase in pressure
- Knurled handle for positive grip
- Handy trigger guard prevents pinching
- Reversible inlet check seat and hydraulic jaws provide double life
- Balanced design reduces user fatigue
- Lubricant inlet 1/4 in. NPT (f); outlet 1/8 in. NPT (f)
- Easily repaired for extended life


Model 3050 high-volume high-pressure

Same as 740 except with 3/8 in. NPT (f) lubricant inlet for use with Lincoln volume high-pressure swivels and hose.

Model 82157 repair parts kit

For control valves models 740 and 3050.

Model 740

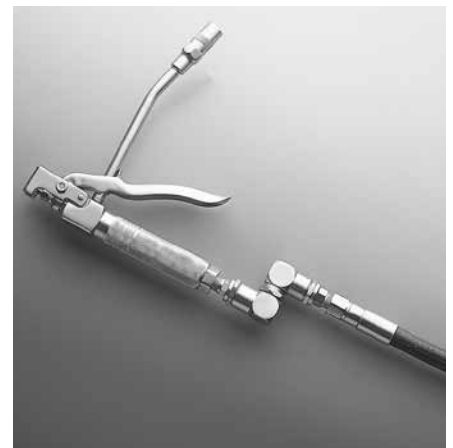

High-pressure grease control valves

Model	Description	Control valve	Thread size	Extension	Coupler
			in.		
740	Heavy-duty, high-pressure	82393	1/4 NPT (f)	Rigid tube	5845
3050	High-volume, high-pressure	81495	3/8 NPT (f)	Rigid tube	5845

Model 85021 kit

Consists of model 740 control valve and model 81387 universal “z” swivel.


Model 82158 repair kit

Repair parts kit for model 81387 standard universal swivel.

WARNING!

Whip Hoses Models 3029, 3034, 5812, 5818, 5861, 81725, 81726, 81795

Install as shown.



WARNING!

For safe and proper use, always consult instructions accompanying product. See Safety Warning Information for appropriate warnings.