

# WHEEL & BRAKE

## LT830A Universal Hub Shocker

Safely remove all frozen hubs instantly without damaging the axle. Universal fit mounts to all axle bolted hubs - 5, 6 & 8 lug hubs. Mounts to two studs using the supplied flanged nuts in seconds. Use with 5 lb. hammer to knock frozen hubs out of axles. Flanged nuts included for improved safety and performance. Ideal for Dodge and other HD trucks. Two mounting holes in 3/4" steel back plate. 1/4" steel square tubing and striking plate.



Included flanged nut sizes - 2 each

- 12mm - 1.50
- 14mm - 1.50
- 7/16" - 20
- 1/2" - 20
- 9/16"
- 5/8" - 18



See it work on YouTube



## LT993 Brake Re-threading Kit

The LT993 re-threads damaged brake wheel cylinders, master cylinder fittings, ABS control module fittings and brake line fittings on vehicles. Works on vehicle where stand alone tap and dies won't fit. Convenient, fast and easy vehicle applications. Compact design male/female combo sockets.


Includes most common SAE & Metric sizes

- 3/8 - 24
- 7/16 - 24
- 1/2 - 20
- 5/8 - 18
- 10mm - 1.0
- 12mm - 1.0



**BRAKE SERVICE**

**THE LT993 WORKS ON -**

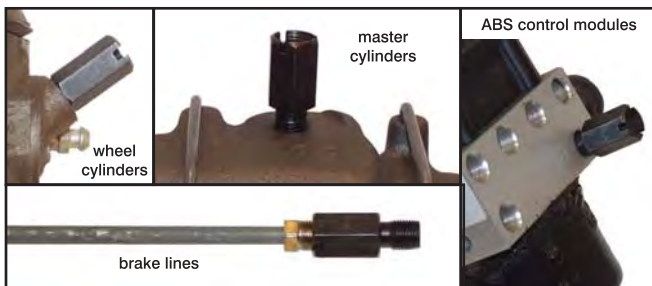

## LT4980 12 Point Socket Euro/Asian Axle Nut Kit

**AUDI - BMW - MERCEDES - VW - LEXUS - TOYOTA**

The LT4980 is a convenient packaged dedicated German/Asian axle nut kit. This kit contains 4 - 12 point 1/2" drive molybdenum impact sockets.



- Socket sizes -
- 24mm
  - 30mm
  - 32mm
  - 36mm

## LT4990 5 pc. Euro Axle Nut Socket Set

**AUDI - VW - MERCEDES ML**

Easy to use dedicated kit for German vehicle axle nuts. The M18 1/2" drive chrome molybdenum impact socket for is rear bearing assemblies on VW Golf/Jetta and other M/C 5 chassis for VW/Audi. The E24 1/2" drive chrome molybdenum impact socket is for Mercedes ML axles. Also includes 19mm - 17mm - 14mm 1/2" hex drive sockets for internal drive axle nuts on VW/Audi vehicles.



## LT4569 German Vehicle Rotating Ring Lug Nut Removal Kit

**AUDI - BMW - PORSHCE - MERCEDES BENZ - VW**

Easily removes rotating ring lug nut locks from German vehicles. Use the high heat resistant LT4569A Silicon Welding Shield to protect wheel from heat damage. Then a Mig welder is used to apply weld slag material at 4 front corners of lug nut. The extra weld material welded to face of lug nut will provide an ideal surface for the LT4569B Twist Socket to grab lug nut for easy removal. LT4569A consumable item with factory defect warranty only. LT4569B has a lifetime warranty. Patent Pending on LT4569A Silicon Welding Shield.



**TIRE & WHEEL SERVICE**

**NEW PRODUCT**



See it work on YouTube

