


LT2510, LT-2520 & LT-2530 E-Z Loader Magazine Lug Nut Sockets

The E-Z Loader is a magazine loading impact socket for multiple lug nut removal. The E-Z Loader removes up to 5 lug nuts at the wheel work site and allows the mechanic to release all of the lug nuts at once. No more rolling or lost lug nuts and wasted motion. The E-Z Loader also adjusts type 9, 12, and 16 cubic inch air chambers that are equipped with 1/2" 20 threaded rod and 3/4" nut. A "MUST" tool for tire shops, brake shops, and locations with high volume wheel removal.


Available in 3 sizes:

LT2510 3/4", 19mm
LT-2520 21mm
LT-2530 13/16"

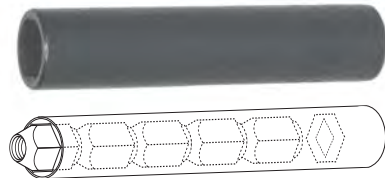

LT-750 Brake Rotor Clamp

The LT-750 secures the rotor to prevent it from being knocked around and allowing rust and dirt to fall between the hub and rotor. Each 3 inch jaw is especially designed to firmly hold the brake rotor on the hub while brake pads are being installed to the caliper and the slides are being serviced. The center of the clamp jaws are formed down towards each other like teeth. The outsides are still pointing straight out the front of the clamp. The teeth bite into the threads of the lug nut stud on the hub while the outside points hold the rotor firmly in place.

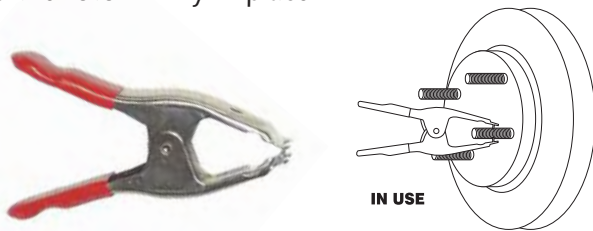

LT4875, LT4875A, LT4876 & LT4876A Lug Nut Removal Flip Sockets

These Lug Nut Removal Flip Sockets are for the easy removal of lug nuts. The thin wall flip sockets allow for removal of lug nuts on specialty wheels and tight tolerances. Individually packaged.

Individual Lug Nut Flip Sockets:

LT4875 3/4", 19mm; 13/16"
LT4875A 3/4", 19mm; 13/16", THIN WALLED
LT4876 19mm; 21mm
LT4876A 19mm; 21mm, THIN WALLED



LT465 12MM & 14MM Wheel Hanger Guides

Wheel Hanger Guides slide into wheel lug nut holes without using threads aiding technicians during wheel mounting. Saves time - no threads, no turning wheel guides to install and remove. Works on Mercedes, Audi, BMW, Mini Cooper, SAAB and Volvo vehicles. Wheel Hanger Guides support wheel/tire so technician can easily thread lug nut bolts into brake rotor. Each kit includes one 12MM and one 14MM Wheel Hanger Guide. Easily slides in and out of rotor holes without using threads. Must have for removing wheels. Helps prevent scratches on expensive wheels. Made of durable bulletproof polycarbonate plastic. Purchase a LT465 kit for the price of one steel hanger pin.



LT-4000 Deluxe Hubcap & Wheel Lock Removal Kit

The LT-4000 safely removes and replaces GM, Ford, and Chrysler wire wheel hubcap locks on 1978-1997 vehicles. This kit also removes factory and most after market mag wheel locking nut locks. Includes the LT4200A Dual Sided Twist Socket Lug Nut Remover. Includes instructions and is packaged in a custom carrying case.



LT-760 Brake Shoe Adjuster Pin Installer

The LT-760 quickly and safely press all 3 sizes of brake shoe adjuster lever posts into the brake shoes (using an air hammer). The narrow tapered end of the tool will easily clear the bent over webbing found on most brake shoes. A real time saver.

