

# Commercial Air Circulators

## Pedestal & Wall/Vertical Mounts

Non-Oscillating 1/4 HP 115V



### Features/Specifications:

- 2 Year Warranty
- Wall/Vertical Mount models include Safety Cable
- 15' Supply Cord and three prong plug included
- Totally enclosed air over ball bearing motor
- Pedestal Models adjust 43"- 63"; 26" Base diameter
- 3 Speed

### Materials:

- Galvanized steel propeller

### Performance:

Prop Dia.	CFM			RPM			F.L. Amps
	High	Med.	Low	High	Med.	Low	
24"	4400	3460	2460	1100	800	600	3.5
30"	6100	4400	2700	1100	800	600	3.5



Adjustable Floor Model  
Solid Base




Non-Oscillating  
Vertical Mount



Non-Oscillating  
Wall Mount

### Fan Component:

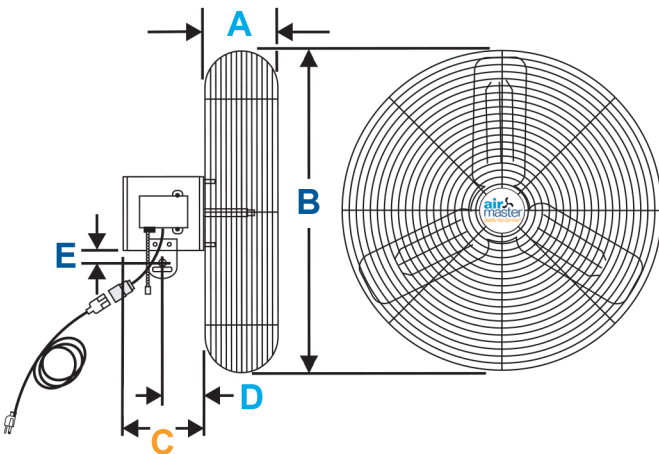

### 24" & 30" Fans

Model	24" Fan		30" Fan		C	D	E
	A	B	A	B			
C-1A 3SP Motor	6-1/4	26.9	5.25	33.39	5.12	2.95	1.58

**Information:**

**Unit Packs 115V / 60 Hz / 1 Phase**

EDP #	Catalog No.	Prop Dia.	Fan Style	Ship Wt.
71584	CA24APE	24"	Adjustable Floor (S.B.)	82
71572	CA24WC	24"	Wall/Vertical Mount	42
71586	CA30APE	30"	Adjustable Floor (S.B.)	87
71573	CA30WC	30"	Wall/Vertical Mount	49

Unit Pack - Motor specified Style Mounting, Propeller & Guard shipped in a single carton

**Head Assemblies 115V / 60Hz / 1 Phase**

EDP #	Catalog No.	Prop Dia.	Fan Style	HP	Ship Wt.
71590	CA24	24"	Head Assembly	1/4	39
71591	CA30	30"	Head Assembly	1/4	48

Motor, Guard, and Propeller pre-assembled



Non-Oscillating Head Assembly

A safety cable kit is included in all overhead mounted air circulators to prevent the fan from falling if accidentally struck or mounting fails. Single safety cable kits consist of 12 feet of 1/16" diameter cable, 2 cable clamps, and instructions.

**For Mounting Options and Other Components see Commercial Air Circulators - Component Parts submittal sheet.**

**Ordering:**

Fan No.	EDP #	Qty.	Catalog No.	CFM	RPM	Comments

Project		Location	
Engineer		Contractor	

Submitted by		Date		Approved by		Date	
--------------	--	------	--	-------------	--	------	--