

PLUGS & COUPLERS

TRU-FLATE® Amflo®




I/M Industrial Design

Thread	NPT	Style	Metal	Tru-Flate	Quantity	Amflo	Quantity
3/8" Body Series – Couplers							
Male	1/4"	D	Steel	–	–	C25-02	10/box
Male	3/8"	D	Steel	–	–	C25	10/box
Male	3/8"	D	Steel	–	–	C25-50	50/box
Male	3/8"	D	Steel	13-527	5/master*	–	–
Female	1/4"	E	Steel	–	–	C26-22	10/box
Female	3/8"	E	Steel	–	–	C26	10/box
Female	3/8"	E	Steel	–	–	C26-50	50/box
Female	3/8"	E	Steel	13-537	5/master*	–	–
Female	1/2"	E	Steel	–	–	C26-24	10/box
Hose Barb	3/8"	F	Steel	–	–	C26-44	10/box
Hose Barb	1/2"	F	Steel	–	–	C26-45	10/box
Lock-On	3/8"	L	Steel	–	–	C26-44L	10/box

1/2" Body Series – Plugs							
Male	3/8"	A	Steel	–	–	CP17-03	10/box
Male	1/2"	A	Steel	–	–	CP17	10/box
Female	3/8"	B	Steel	–	–	CP18-23	10/box
Female	1/2"	B	Steel	–	–	CP18	10/box
Hose Barb	1/2"	C	Steel	–	–	CP17-45	10/box

1/2" Body Series – Couplers							
Male	3/8"	D	Steel	–	–	C9-03	10/box
Male	1/2"	D	Steel	–	–	C9	10/box
Male	1/2"	D	Steel	–	–	C9-50	50/box
Male	1/2"	D	Steel	13-705	5/master*	–	–
Female	3/8"	E	Steel	–	–	C10-23	10/box
Female	1/2"	E	Steel	–	–	C10	10/box
Female	1/2"	E	Steel	–	–	C10-50	50/box
Female	1/2"	E	Steel	13-713	5/master*	–	–
Hose Barb	1/2"	F	Steel	–	–	C10-45	10/box

*Carded display package

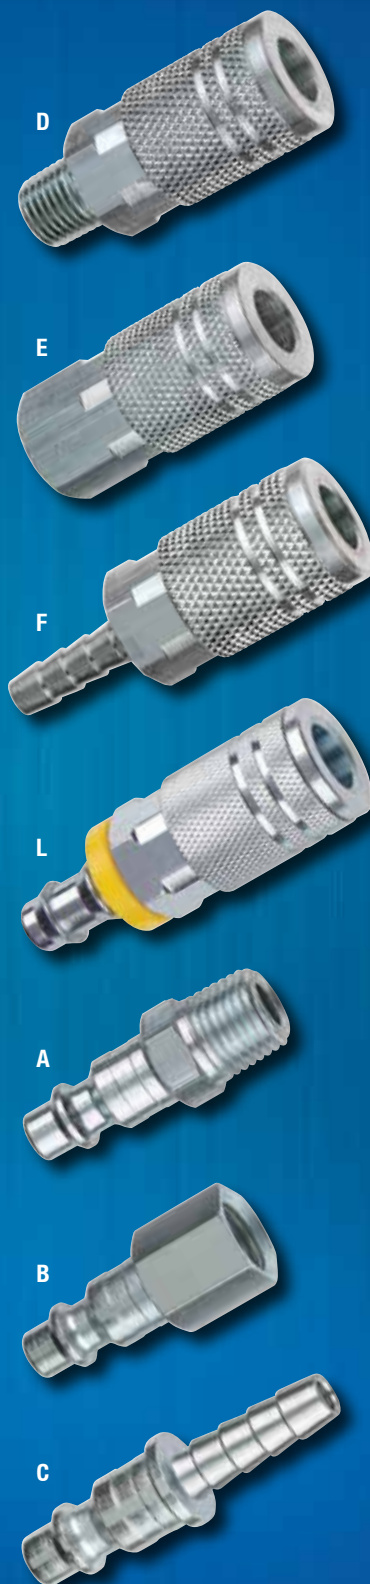

WARNING: Due to their large size, these couplers should not be connected or disconnected if the line pressure exceeds 40 PSI.
WARNING: Couplers and plugs are intended for use on compressed air lines only. All have maximum rated working pressure of 300 PSI.