



Paper sheets and rolls are engineered for optimum performance when sanding metal, wood, composites and painted surfaces. The sheets are packed in protective packaging to eliminate waste and permit easy, neat storage.

Categories:
Applications:

All purpose, wood sanding, stearated (non-loading), waterproof, and heavyweight
Light-duty metal sanding, primer sanding, defect removal from painted surfaces, filler sanding, sanding and finishing of composites and fiberglass, bare wood sanding, sanding between sealer coats

Size Range:
Grit Range:

Full Sheets, Cut Sheets, File Strips and Rolls
36 – 2500

Abrasive Grain:

Ceramic Alumina, Zirconia Alumina, Aluminum Oxide, Silicon Carbide, and Garnet

Paper Weights:

Heavyweight – E; Lightweight – A through D

Machine Used:



Material-to-Product Recommendation Guide

	BEST			BETTER			GOOD						
	Blaze A995	Dry Ice A975	A2750P	Black Ice T214	Black Ice T401	A259PS	Durite A475	Blue-Bak T414	Gold Reserve A296	PB273	Garnet	TufBak T461	Other
Unfinished Metal	◆	◆	◆						◆	◆			
Primed / Painted Surfaces / Between Coats	◆	◆	◆				◆		◆	◆			
Fiberglass / Composites	◆	◆	◆				◆		◆	◆			
Bare Wood	◆	◆	◆								◆		
											A511, A513, A514		
Clear Coat Sanding				◆	◆							◆	
Sealer Sanding	◆	◆	◆				◆		◆	◆			
Lacquer Sanding				◆	◆			◆				◆	
Wet Sanding				◆	◆			◆				◆	
Paint Stripping	◆	◆	◆			◆	◆						A290
All Purpose	◆	◆	◆			◆							A212, A213, A211

Cross Reference Guide

NORTON	3M	Hermes	Klingspor	Mirka	SIA	VSM
STEARATED (NON-LOADING)						
Blaze A995	732U, 737U, 755L, 775L	CR116	—	—	—	—
Dry Ice A975	334U	—	PS36	—	Siaprime 5550	—
A2750P	216U, 255L, 236U, 260L, 334U	VC154-LL	PS33, PS73W	Q-Silver, Royal Micro	1940, 1944, 1950	—
A259PS	216U, 255L, 236U, 260L, 334U	—	—	—	—	—
Durite A475	405N, 414N, 415U, 426U, 435U	SF168	PL35, PS14	CaratFlex, PolarStar	1748	CP131A
Gold Reserve A296 / PB273	216U, 236U, 316U, 315U, NX	VC154-LL	PS33, PS73W	Q-Silver, Royal Micro, Bulldog Gold	19,401,950	MP10
WATERPROOF						
Blue Ice T214	213Q	WAFlex28	—	—	1913, 1951, 1600	—
Blue Ice T401	401Q, 414Q, 486Q	WSFlex16	PL35	Waterproof (A)	—	CP918A
Blue-Bak T414	413Q	WSFlex 16	PS14	Waterproof (A)	—	CP918A/C
TufBak T461	431Q	WSFlex 18	PS14	—	1727	CP918A/C
ALL PURPOSE/WOOD						
A211	230U, 240N, 346U	—	—	—	—	—
A212	210N	—	PL31	—	—	—
A213	230N	—	PL31	—	—	—
Garnet A511	110N	—	PS10	—	1400	—
Garnet A513	130N	GCAB	—	—	—	—
Garnet A514	140N	GCAB	—	—	—	—
HEAVYWEIGHT PAPER						
BlueFire H875P	740I, 745I, 750U, 751U, 751I	BW110	PS36	Royal CRS. Cut	1820, 1919, 1948	KP510E, KP709

Stearated (Non-Loading) 9" x 11" Sheets


The best choice for sanding painted surfaces, composites, plastics or any material that tends to load



A2750P NO-FIL ALUMINUM OXIDE

- Premium, P-graded, heat-treated aluminum oxide abrasive for consistent surface finish, exceptional performance on all surfaces and coatings
- Unique fiber-reinforced, B-weight latex-saturated backing for 50 - 60 percent improvement in tear strength, exceptional flexibility, can be folded without cracking
- Non-pigmented, water based stearate (anti-clog) coating, open coat for best resistance to clogging and loading during sanding


Best choice for moderate material removal

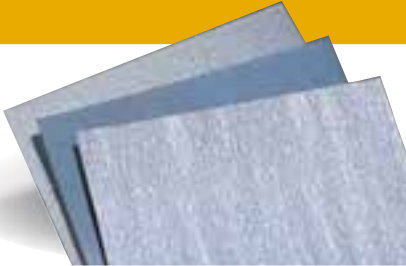

A259PS NO-FIL ALUMINUM OXIDE

- Premium heat-treated abrasive offers faster cut and long sanding life
- Open coat, non-pigmented, water-based stearate coating prevents color transfer and minimizes loading
- Increased backing weight, fiber-reinforcement and latex saturation offers better grain retention and tear-resistance yet is highly flexible for easy folding and unfolding

The better choice for gel coats, hard composite substrates, abrasion-resistant coatings, and woodworking applications

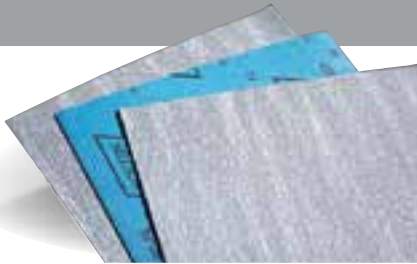

DURITE A475 NO-FIL SILICON CARBIDE

- P-graded, silicon carbide abrasive for easy penetration of the hardest surfaces
- Water based stearate, non-pigmented, No-Fil coating resists loading for the longest usable product life; no color transfer to work
- Fiber-reinforced, latex paper backing provides flexibility and resistance to tearing

Good choice for fast cuts and an even finish



PB273 NO-FIL ALUMINUM OXIDE

- P-graded, sharp light-brown, aluminum oxide abrasive for fast cut rate, extended life and consistent finish
- Water based non-pigmented stearate provides maximum load resistance and extended life; no dye in coating means no risk of color transfer or finish contamination
- Flexible latex-saturated B-weight backing, with a full resin bond and open coat for improved life

Stearated (Non-Loading) 9" x 11" Sheets *continued*

9 x 11
Paper Sheets



		JOBPACK				
		BEST	BEST	BETTER	GOOD	
TIER:		A2750P	A259PS	DURITE A475	PB273	
TRADENAME:		NO-FIL	NO-FIL	NO-FIL	NO-FIL	
ABRASIVE:		Aluminum Oxide	Aluminum Oxide	Silicon Carbide	Aluminum Oxide	
BACKING WEIGHT:		B-Weight	C- & B-Weight	B-Weight	B-Weight	
OTHER:		P-Graded	P-Graded	P-Graded	P-Graded	
SIZE (W x L)	GRIT	PKG./CASE	PART #	PART #	PART #	PART #
9 x 11	80	50/250	662611 31634	076607 68174*	662544 87393	666233 11878
	100	100/500	662611 31633	076607 68173*	662544 87394	666233 11877
	120	100/500	662611 31632	076607 68172*	662544 87395	666233 11876
	150	100/500	662611 31631	076607 68171*	662544 87396	666233 11875
	180	100/500	662611 31630	076607 68168*	662544 87397	666233 11874
	220	100/500	662611 31629	076607 68167*	662544 87398	666233 11873
	240	100/500	662611 31628		662544 87399	666233 11879
	280	100/500	662611 31627			
	320	100/500	662611 31626	076607 68166*	662544 87400	666233 11871
	400	100/500	662611 31624	076607 68165*		666233 11870
	500	100/500	662611 31623			
	600	100/500	662611 31622			
	800	100/500	662611 31621			
	1000	100/500	662611 31620			
	1200	100/500	662611 31619			
	1500	100/500	662611 31618			

* Packaging Standards: A259PS Job Packs: 20 sheets per pack / 10 packs per standard package for a total of 200 sheets

Rubber Hand Sanding Blocks

- Resilient rubber blocks that conform well to mild contours and flat surfaces

DESCRIPTION	STD. PKG.	PART #
2-3/4 x 5	5	076607 01889

