

**68450 FORD / CHRYSLER SPARK PLUG BOOT REMOVER** This tool goes down in the confined space of the spark plug hole to easily remove “ripped” and “stuck on” spark plug boots where there is no access to grab the boot for removal. Made from quality heat treated steel with a SP High Tech black finish.

**\*Applications:**


**Ford**

- 4.6L V8 2 valve heads 1997-1999
- 4.6L V8 2 valve heads 2000 & later
- 4.6L V8 3 valve heads 2007 & later
- 5.4L V8 2 valve heads 1997-2004
- 5.4L V8 3 valve heads 2005 & later
- 6.8L V10 2 valve heads 1999-2008
- 6.8L V10 3 valve heads 2008 & later

**Chrysler**

- 3.7L V6 2 valve heads 2005 & later
- 5.7L V8 Hemi 2 valve heads 2004 & later


\*Works on most other spark plugs with a porcelain diameter smaller than 0.432".

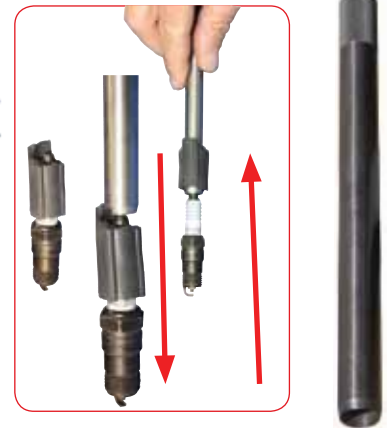

**68800 LOW PROFILE PITMAN ARM POPPER** U.S. PATENT # 9,085,068

Quickly and easily remove the Pitman Arm off the steering gear box on GM series trucks and SUVs without compromising the box position. Designed to fit confined space, eliminating the need to remove the gear box. This tool is made of forged chromolly steel providing strength required to perform the task with ease and efficiency.

**Applications:** GM series trucks and SUVs 1988 and later Most C & K chassis vehicles with a steering gear box / Pitman Arm set up

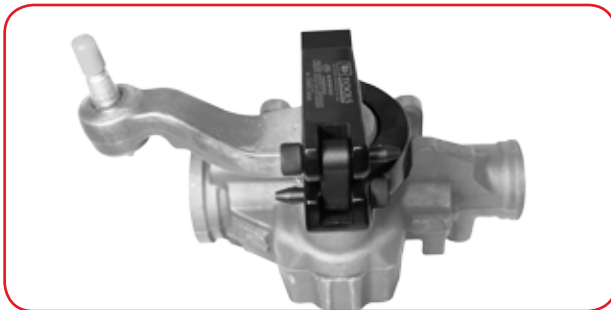

**68950 VW, AUDI 32mm 12-POINT DEEP AXLE**

**NUT SOCKET** Remove and install 12-point axle nuts on VW & Audi SUVs. The forged 12-point 32mm socket with 1/2" drive is the strongest in the industry that will do the job every time.

**Applications: VW**

- Touareg 2004 & later
- AUDI Q7 2006 & later



**68960 39mm 12-POINT SOCKET FOR**

**TOYOTA/LEXUS** The strongest in the field with the torque requirements for remove and installation of 12-point axle nuts without breakage.

**Applications:**

- TOYOTA:
  - Tundra 4X4 2007 & later
  - Sequoia 2008 & later
- LEXUS:
  - GX470 2003 & later
  - LX570 SUV 2008 & later
  - LS460 2007 & later
  - LS460H 2007 & later
  - LS600H 2008 & later
  - GX470 2003 & later
  - LS460 2007 & later
  - LS600H 2008 & later



# GM

**69250 GM DURAMAX FLYWHEEL LOCK**



See Page 22

**93260 FAN CLUTCH WRENCH 36mm**



See Page 28, 30

**93480 GM TRANSMISSION SEAL REMOVAL AND INSTALLATION TOOL**



See Page 28

**96480 GM TRANSMISSION SEAL REMOVAL AND INSTALLATION TOOL**



See Page 29

**99800A FAN CLUTCH PULLEY HOLDER**



See Page 28, 30, 32

# CHRYSLER • DODGE • FIAT • JEEP

**10800 FAN CLUTCH WRENCH**



See Page 5, 28, 32

**13450 DODGE HARMONIC DAMPER PULLEY PULLER**



See Page 11, 31

**14200 PNEUMATIC U-JOINT C-CLIP REMOVER**



See Page 13

**15200 DIESEL DEF TUBE RELEASE FORKS**



See Page 14

**15500, 15510, 15520 NOx AND SOOT SENSORS**



See Page 14

**15700 FIAT AND DODGE TIMING BELT WRENCH**



See Page 14

**61600 FAN CLUTCH WRENCH**



See Page 15, 16, 28, 29, 31, 32

**66150 FLARE NUT WRENCH FOR CUMMINS DIESEL ENGINE COMMON RAIL INJECTION**



See Page 19

**68450 SPARK PLUG BOOT REMOVER**



See Page 21

**88550 HEAVY DUTY 36mm FAN CLUTCH WRENCH**



See Page 5, 25, 30

**89100 CUMMINS SPECIAL OFFSET WRENCH 13mm**



See Page 26

**89150 CUMMINS SPECIAL OFFSET WRENCH 10mm**



See Page 26

**93260 FAN CLUTCH WRENCH 36mm**



See Page 28, 30

**95210 FAN CLUTCH WRENCH 36mm & 48mm**



See Page 5, 15, 16, 28, 30-32

**95650A CUMMINS ENGINE ROTATING TOOL**



See Page 29

**99100 FUEL INJECTION 6 POINT FLARE NUT SOCKET**



See Page 30

**99800A FAN CLUTCH PULLEY HOLDER**



See Page 28, 30, 32

# FORD

**11400 FORD POWER STROKE 6.7L DIESEL INJECTOR SOCKETS**



See Page 7

**12250 FORD 6.4L TURBO ARM PULLER**



See Page 9

**13800 FORD 6.0L TENSIONER WRENCH**



See Page 12

**14200 PNEUMATIC U-JOINT C-CLIP REMOVER**



See Page 13

**15200 DIESEL DEF TUBE RELEASE FORKS**



See Page 14

**61600 FAN CLUTCH WRENCH**



See Page 15, 16, 28, 29, 31, 32

**68450 SPARK PLUG BOOT REMOVER**



See Page 21

**93260 FAN CLUTCH WRENCH 36mm**



See Page 28, 30

**95210 FAN CLUTCH WRENCH 36mm & 48mm**



See Page 5, 15, 16, 28, 30-32

**95260 FAN CLUTCH WRENCH 40mm**



See Page 15, 16, 29, 31, 32

## LARGE TRUCKS • DIESEL

**13250 FUEL LINE DISCONNECT TOOL SET FOR 3/8" VOSS TYPE CONNECTORS**



See Page 10

**13260 FUEL LINE DISCONNECT TOOL SET FOR CUMMINS ISB AND ISX ENGINES**



See Page 10

**13270 FUEL LINE DISCONNECT TOOL SET FOR 1/2" VOSS TYPE CONNECTORS**



See Page 10

**13900 (13910, 13920) FUEL LINE SOCKETS 6 POINT FOR CUMMINS ENGINES**



See Page 12

**14200 PNEUMATIC U-JOINT C-CLIP REMOVER**



See Page 13

**15300 EGT SENSOR SOCKETS**



See Page 14

**15500, 15510, 15520 NOx AND SOOT SENSORS**



See Page 14

**61600 FAN CLUTCH WRENCH**



See Page 15, 16, 28, 29, 31, 32

**66150 FLARE NUT WRENCH FOR CUMMINS DIESEL ENGINE COMMON RAIL INJECTION**



See Page 19

**88550 HEAVY DUTY 36mm FAN CLUTCH WRENCH**



See Page 5, 25, 30

**89100 CUMMINS SPECIAL OFFSET WRENCH 13mm**



See Page 26

**89150 CUMMINS SPECIAL OFFSET WRENCH 10mm**



See Page 26

**95650A CUMMINS ENGINE ROTATING TOOL**



See Page 29

**99100 FUEL INJECTION 6 POINT FLARE NUT SOCKET**



See Page 30