



1/2" DRIVE 6 PIECE METRIC HEX BIT IMPACT SOCKET SET

Product #: J74252

- ▶ Made of forged steel.
- ▶ Size stamped on tool for easy identification.
- ▶ Side locking hole.



MM



| Contents | Description |
|-----------|--------------------------------------|
| J7441-6M | Socket, Impact Hex Bit 1/2" DR 6 mm |
| J7441-8M | Socket, Impact Hex Bit 1/2" DR 8 mm |
| J7441-10M | Socket, Impact Hex Bit 1/2" DR 10 mm |
| J7441-12M | Socket, Impact Hex Bit 1/2" DR 12 mm |
| J7441-14M | Socket, Impact Hex Bit 1/2" DR 14 mm |
| J7441-17M | Socket, Impact Hex Bit 1/2" DR 17 mm |
| J2585 | Socket Bar, 9" |
| J2592 | Socket Clip, 1/2" DR |

Weight (lbs): 2.55

ASME B107.110-2012

1/2" DRIVE 3 PIECE LOCKING IMPACT EXTENSION SET


Product #: J7515

- ▶ Solid one-piece design helps prevent the locking components from becoming loose or disengaged.
- ▶ Patented locking feature locks sockets to the extension with exceptional force.
- ▶ Knurled shank provides a slip-resistant grip when hand-turning the extension.

| Contents | Description |
|----------|--|
| J7503 | Extension, Impact, Locking 1/2" DR x 3" |
| J7505 | Extension, Impact, Locking 1/2" DR x 5" |
| J7510 | Extension, Impact, Locking 1/2" DR x 10" |

Weight (lbs): 2.06

ASME B107.110-2012

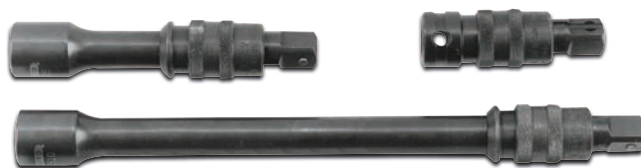

1/2" DRIVE 4 PIECE IMPACT EXTENSION SET

Product #: J7515A

- ▶ Solid one-piece design helps prevent the locking components from becoming loose or disengaged.
- ▶ Patented locking feature locks sockets to the extension with exceptional force.
- ▶ Knurled shank provides a slip-resistant grip when hand-turning the extension.

| Contents | Description |
|----------|-------------------------------|
| J7180P | Extension, Impact 1/2" DR 2" |
| J7182P | Extension, Impact 1/2" DR 3" |
| J7181P | Extension, Impact 1/2" DR 5" |
| J7183-00 | Extension, Impact 1/2" DR 10" |

Weight (lbs): 2.08

ASME B107.110-2012


*This size not covered under ASME Standards




1/2" DRIVE IMPACT HEX BIT SETS & EXTENSIONS

1/2" DRIVE TORX® IMPACT SOCKETS

- › Proto® Torx® Impact Sockets can be used on stubborn Torx® fasteners.
- › Tight tolerances for snug fit on fastener.
- › Torx® Impact Sockets are used wherever power drive tools are used to help install or remove fasteners.
- › Torx® Impact Sockets are designed to withstand the high torque and force associated with impact tools in repetitive applications.
- › Socket size stamped on tool for easy identification.
- › Side locking hole.




| Torx® Size |  | Nut End Outside Diameter (in) (B) | Drive End Outside Diameter (in) (C) | Nut Depth (in) (D) | Bolt Clearance Depth (in) (E) | Overall Length (in) (L) | Weight (lbs) |
|------------|---|-----------------------------------|-------------------------------------|--------------------|-------------------------------|-------------------------|--------------|
| E14 | J7414TX | 11/16 | 7/8 | 7/16 | 27/32 | 1-1/2 | 0.14 |
| E16 | J7416TX | 11/16 | 7/8 | 7/16 | 27/32 | 1-1/2 | 0.13 |
| E18 | J7418TX | 27/32 | 7/8 | 17/32 | 27/32 | 1-1/2 | 0.14 |
| E20 | J7420TX | 15/16 | 15/16 | 19/32 | 27/32 | 1-1/2 | 0.17 |




1/2" DRIVE IMPACT HEX BIT SOCKETS

- › Proto® Hex Bit Impact Sockets can be used on stubborn fasteners.
- › Tight tolerances for snug fit on fastener.
- › Hex bit impact sockets are used wherever powered drive tools are used to install or remove fasteners.
- › Hex bit impact sockets are designed to withstand the high torque and force associated with impact tools in repetitive application.
- › Side locking hole.



| INCH |  | Bit Length (in) | Overall Length (in) | Weight (lbs) |
|------|---|-----------------|---------------------|--------------|
| 1/4 | J74411/4 | 1-3/4 | 3-1/4 | 0.18 |
| 5/16 | J74415/16 | 1-3/4 | 3-1/4 | 0.22 |
| 3/8 | J74413/8 | 1-3/4 | 3-1/4 | 0.24 |
| 7/16 | J74417/16 | 1-3/4 | 3-1/4 | 0.27 |
| 1/2 | J74411/2 | 1-7/8 | 3-5/8 | 0.47 |
| 9/16 | J74419/16 | 1-7/8 | 3-5/8 | 0.49 |
| 5/8 | J74415/8 | 2 | 4 | 0.84 |



| MM |  | Bit Length (in) | Overall Length (in) | Weight (lbs) |
|----|---|-----------------|---------------------|--------------|
| 6 | J7441-6M | 1-3/4 | 3-1/4 | 0.19 |
| 8 | J7441-8M | 1-3/4 | 3-1/4 | 0.21 |
| 10 | J7441-10M | 1-3/4 | 3-1/4 | 0.26 |
| 12 | J7441-12M | 1-3/4 | 3-1/4 | 0.29 |
| 14 | J7441-14M | 1-7/8 | 3-5/8 | 0.49 |
| 17 | J7441-17M | 2 | 4 | 0.88 |



1/2" DRIVE ADAPTERS

- › Use adapters to help increase or decrease drive end size.
- › Do not use hand adapters with power tools.
- › Do not over torque small sockets when using them with adapters on large drive tools.
- › Size stamped on tool for easy identification.
- › Side locking hole.

| Product # | INCH | Overall Length (in) | Weight (lbs) |
|--------------|-----------------|---------------------|--------------|
| J7650 | 3/8" F x 1/2" M | 1-5/16 | 0.13 |
| J7651 | 1/2" F x 3/8" M | 1-7/16 | 0.12 |
| J7652 | 1/2" F x 3/4" M | 1-29/32 | 0.35 |
| J7653 | 3/4" F x 1/2" M | 2-1/16 | 0.48 |
| J7655 | 5/8" F x 1/2" M | 1-53/64 | 0.34 |

ASME B107.110-2012 



Torx® is a trademark of Acument Intellectual Properties, LLC