

IMPACT WRENCHES *Built to deliver more value, higher productivity & long life in the toughest working environments*

Standard Duty Economical Rocking Dog Impact / Smooth Operation & Maximum Durability / Built-In Regulator with 4 Power Settings / Maximum Torque in Reverse Direction / Front & Rear Bumper Guards / One Hand Push Button Forward & Reverse / 1/4 NPT Air Inlet / 90 PSI Maximum Pressure / 1 Year Warranty



VT2000 1/2"

Model	Sq. Drive	RPM	CFM	Noise	Min. Hose	Torque Range	Length	Weight
VT2000	1/2"	7,000	16	92 dB	3/8" I.D.	230 ft. Lbs.	7"	4.8 Lbs.

Professional 4 Positive Power Settings in Forward / Maximum Torque in Reverse / Durable Pin Clutch Impact Mechanism / Ergonomic Contoured Elastomer Handle Grip / Handle Exhaust / 360° Air Inlet Swivel (Except VT2100) / Push Button Forward & Reverse For Single Hand Operation / Easy Touch Trigger / 1/4 NPT Air Inlet / 90 PSI Maximum Pressure / 1 Year Warranty



VT2100 3/8" | VT2101 1/2" | VT2102 3/4"

Model	RPM	CFM	Sq. Drive	Noise	Min. Hose	Torque Range	Length	Weight	Vibration
VT2100	9,000	13.4	3/8"	95 dB	3/8" I.D.	134-160 ft. Lbs.	6-1/2"	2.8 Lbs.	2.6 M/S2
VT2101	8,000	13.6	1/2"	95 dB	3/8" I.D.	241-400 ft. Lbs.	7.48"	4.6 Lbs.	3.2 M/S2
VT2102	4,500	20	3/4"	98 dB	1/2" I.D.	700-1000 ft. Lbs.	9.3"	8.8 Lbs.	4.4 M/S2

Heavy-Duty Twin Hammer Impact Mechanism Delivers Balanced Blows for Maximum Power / Adjustable Power Output in Forward & Reverse / Handle Exhaust / Two-Piece Housing for Easy Service & Operator Convenience / Easy Touch Trigger Provides Greater Control & Operator Comfort / 3/8" Minimum Hose Size / 90 PSI Maximum Pressure / 1 Year Warranty



VT2200 3/8" | VT2201 1/2" | VT2202 3/4"

Model	RPM	CFM	Sq. Drive	Noise	Air Inlet	Torque Range	Length	Weight	Vibration
VT2200	10,000	2.8	3/8"	88 dB	1/4 NPT	200 ft. Lbs.	6-3/8"	3.5 Lbs.	3.1 M/S2
VT2201	7,000	4.6	1/2"	88 dB	1/4 NPT	450 ft. Lbs.	7-1/4"	5.6 Lbs.	3.6 M/S2
VT2202	5,000	7.2	3/4"	89 dB	3/8 NPT	750 ft. Lbs.	9-5/8"	8.75 Lbs.	5.3 M/S2

Composite Heavy-Duty Twin Hammer Impact Mechanism Delivers Balanced Blows for Maximum Power / Three Power Settings in Forward / Maximum Torque in Reverse / Extra Strong, Lightweight Construction / Composite Material Housing with Rubber Coated Steel Hammer Case / Handle Exhaust / Two-Piece Housing for Easy Service / Easy Touch Trigger / 3/8" Minimum Hose Size / 90 PSI Maximum Pressure / 1 Year Warranty



VT2200C 3/8" | VT2201C 1/2" | VT2202C 3/4"

Model	RPM	CFM	Sq. Drive	Noise	Air Inlet	Torque Range	Length	Weight	Vibration
VT2200C	12,000	7.2	3/8"	87 dB	1/4 NPT	240-280 ft. Lbs.	6-1/2"	2.6 Lbs.	5.3 M/S2
VT2201C	7,500	7.2	1/2"	87 dB	1/4 NPT	900 ft. Lbs.	7-5/8"	4.5 Lbs.	5.3 M/S2
VT2202C	5,500	7.2	3/4"	88 dB	3/8 NPT	950 ft. Lbs.	9-1/16"	7.65 Lbs.	5.3 M/S2

Angle Head Twin Hammer Impact Mechanism / Lever Throttle for Easy Operation / Adjustable Torque Settings in Forward or Reverse / One Piece Anvil is Manufactured of Alloy Nickel Chromium & Molybdenum Steel / 90 PSI Maximum Pressure / 1 Year Warranty




VT2500 3/8" | VT2501 1/2" | VT2502 1/2"

Model	RPM	CFM	Sq. Drive	Noise	Air Inlet	Min. Hose	Torque Range	Length	Weight
VT2500	6,500	3	3/8"	80 dB	1/4 NPT	3/8" I.D.	74 ft. Lbs.	10-1/2"	3.3 Lbs.
VT2501	6,500	3	1/2"	80 dB	1/4 NPT	3/8" I.D.	74 ft. Lbs.	10-1/2"	3.3 Lbs.
VT2502	5,000	3	1/2"	80 dB	1/4 NPT	3/8" I.D.	140 ft. Lbs.	12"	4 Lbs.
VT2503	8,500	3	1/2"	80 dB	1/4 NPT	3/8" I.D.	100 ft. Lbs.	10-1/2"	3.8 Lbs.

AIR RATCHETS *Built with a heat-treated, hardened ratchet yoke to maintain peak performance and prevent "spreading"*

Standard Duty Planetary Gear Design / Lever Throttle for Easy Operation & Enhanced Speed Control / Great for Hard-to-Reach Areas / Ergonomic Square Handle Design for Positive Grip / 1/4 NPT Air Inlet / 90 PSI Maximum Pressure / 1 Year Warranty

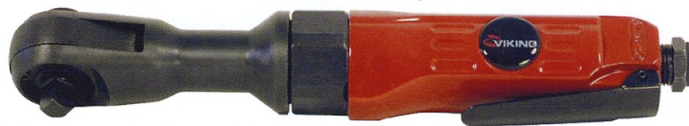

VT1000 1/4" | VT1001 3/8" | VT1003 1/2"

Model	Sq. Drive	RPM	CFM	Noise	Min. Hose	Torque Range	Length	Weight
VT1000	1/4"	240	12	90 dB	1/4" I.D.	20 ft. Lbs.	8-1/4"	1.5 Lbs.
VT1001	3/8"	150	14	90 dB	3/8" I.D.	45 ft. Lbs.	10"	2.75 Lbs.
VT1003	1/2"	150	14	90 dB	1/2" I.D.	45 ft. Lbs.	10"	2.8 Lbs.


Mini Durable Ratchet Head / Variable Speed Throttle Provides Precise Control / Ball & Needle Bearing Construction for Long Life / Compact & Lightweight / 1/4 NPT Air Inlet / 90 PSI Maximum Pressure / 1 Year Warranty



VT1100 1/4" | VT1101 3/8"

Model	Sq. Drive	RPM	CFM	Noise	Min. Hose	Torque Range	Length	Weight
VT1100	1/4"	230	5	87 dB	1/4" I.D.	25 ft. Lbs.	6-1/2"	1 Lbs.
VT1101	3/8"	230	5	87 dB	1/4" I.D.	25 ft. Lbs.	6-1/2"	1 Lbs.

Heavy-Duty No Spread Ratchet Head / Ergonomic Comfort Grip on Models VT1202/VT1203 / Compact Head Design Allows Greater Flexibility in Tight Areas / Variable Speed Throttle / 1/4 NPT Air Inlet / 90 PSI Maximum Pressure / 1 Year Warranty



VT1202 3/8" | VT1203 1/2" | VT1204 1/2"

Model	Sq. Drive	RPM	CFM	Noise	Min. Hose	Torque Range	Length	Weight
VT1202	3/8"	160	7	95 dB	3/8" I.D.	75 ft. Lbs.	9"	2.6 Lbs.
VT1203	1/2"	160	7	95 dB	3/8" I.D.	75 ft. Lbs.	9"	2.6 Lbs.
VT1204	1/2"	150	5	98 dB	3/8" I.D.	90 ft. Lbs.	14-3/8"	4.4 Lbs.

Torque Tamer

IMPACT WRENCH



VT700K Torque Tamer

Designed for the Professional Tire Installer

- Light-weight ergonomic design reduces fatigue
- Powerful enough to remove the most stubborn lug nuts
- Extended 2" anvil
- 3 forward power settings avoids over-torque
- Twin hammer impact mechanism delivers balanced blows for maximum power
- Easy touch trigger provides greater control & operator comfort
- Two piece housing offers easy service
- 1 year warranty
- 1/2" Sq. Drive / 1/4" Air Inlet / 90 PSI Air Pressure / 50-600 ft. Lbs Forward Torque / 900 ft. Lbs. Reverse Torque / 7,500 RPM

Includes 3 Free Flip Sockets & Airtool Oil!

