

## PERCUSSIVE TOOLS

Viking offers a variety of sizes, capacities and accessories built durably to ensure long life under tough operating conditions. Viking's line of percussive tools has a constant duty rating and are ideally suited for multiple applications on any surface. We build them to work hard on any job.

**Air Hammers** Patented Vibration Dampening System / Easy Touch Trigger / Special Heat Treated Hardened Steel Barrel & Piston / Standard Spring Retainer / Elastomer Handle Grip / 3/4" Bore Size / 1/4 NPT Air Inlet / 3/8" I.D. Min. Hose / 90 PSI / 1 Year Warranty



VT6006 Vibration Damped


**Chipping Hammers** Outside Trigger & Open Hand Handle Design / Heavy-Duty Hammer / Alloy Steel Piston & Barrel / 1-1/8" Bore Size / Round Shank / 3/8 NPT Air Inlet / 1/2" I.D. Min. Hose / 90 PSI / 1 Year Warranty



VT6102 2"

Model	Type	RPM	CFM	Stroke	Blows	Shank	Noise	Vibration	Length	Weight
VT6000	Medium Air	-	10	2-5/8"	3000	.401"	101 dB	10.24 M/S2	7-1/2"	3 Lbs.
VT6001	Heavy Air	-	10	2-5/8"	3000	.401"	110 dB	5.1 M/S2	6-3/4"	3.6 Lbs.
VT6005	Damped Air	-	10	3"	2500	.401"	113 dB	3.5 M/S2	6-1/2"	5.5 Lbs.
VT6006	Damped Air	-	10	3-3/4"	2100	.401"	116 dB	3.5 M/S2	11"	6.2 Lbs.
VT6102	Chipping	2,400	30	2"	2,400	.680"	115 dB	8.6 M/S2	12-7/8"	15 Lbs.
VT6103	Chipping	1,920	31	3"	1,920	.680"	120 dB	13.9 M/S2	14-7/8"	16 Lbs.
VT6104	Chipping	1,500	33	4"	1,500	.680"	119 dB	16.3 M/S2	16-1/8"	17.8 Lbs.

**Flux Scaler** Heat Treated Barrels & Pistons / Quick Change Type Chisel Retainer / Comfortable Lever Throttle / Comes Standard With Chisel / Elastomer Handle Grip (Pistol) / 90 PSI / 1 Year Warranty



VT6009 Straight Handle

**Needle Scaler** Auto-Adjusts to Any Surface Contour / Cleans Welds, Castings, Brick, Stone Work, Concrete & Steel Plates / Heat Treated Barrels & Pistons / Chrome Vanadium SCM-4 Needles / 19 Needle (1.2" x 7") / 90 PSI / 1 Year Warranty



VNT1851 Heavy Duty

Model	Type	RPM	CFM	Stroke	Noise	Air Inlet	Min. Hose	Vibration	Length	Weight
VT6008	Flux, Pistol	3,000	10	5/8"	107 dB	1/4"	3/8" I.D.	8.7 M/S2	10"	3.6 Lbs.
VT6009	Flux, St.	4,400	10	7/8"	101 dB	1/4"	3/8" I.D.	14.5 M/S2	16.1"	3.7 Lbs.
VT6200	Needle, St.	4,400	10	-	104 dB	1/4"	3/8" I.D.	10.2 M/S2	16.14"	5.9 Lbs.
VT6202	Needle, Pistol	3,700	10	-	107 dB	1/4"	3/8" I.D.	8.7 M/S2	10"	6.2 Lbs.
VNT1851	Needle, St.	3,700	10	-	104 dB	1/4"	3/8" I.D.	9 M/S2	14.75"	5.72 Lbs.

## CUTTING TOOLS

Viking offers a versatile range of shears, saws, nibblers and nippers ready to handle any application and designed to cut or trim a wide range of materials. Ultra light weight construction with low vibration, all of our air cutting tools are ergonomically designed for comfort, control and easy handling.

**Cut-Off Saw** 3" Heavy Duty Wheel / Direct Drive Motor / Low Vibration / 1/2 HP / 3/8" I.D. Min. Hose / 90 PSI Required Pressure



V325 Mini Cut-Off Saw

**Circular Saw** Adjustable Cutting Depths Capability / Lock-Off Safety Throttle / Heavy-Duty Motor & Geared Drive / Metal Blade Guard / Accepts 2" Capacity Blade / Light Weight / VT7502 - Ideal For Cutting Ferrous Metal / VT7503 - Ideal For Cutting Non-Ferrous Metal, Wood, Fiberglass And Composites / 1/4 NPT Air Inlet / 3/8" I.D. Min. Hose / 100 PSI Max. Pressure / 1 Year Warranty



VT7503 2" Circular Saw

Model	Type	RPM	CFM	Noise	Air Inlet	Adapter	Vibration	Length	Weight
V325	Cut-Off	20,000	4	92 dB	1/4 NPT	1/4"	<2.5 M/S2	7-3/8"	1-1/2 Lbs.
VT7502	Circular	620	4	94 dB	1/4 NPT	-	3.7 M/S2	9-5/8"	2.3 Lbs.
VT7503	Circular	3,500	4	94 dB	1/4 NPT	-	3.7 M/S2	9-5/8"	2.3 Lbs.

**Reciprocating Saws** Positive Blade Retention / Adjustable Guard Guide / Kick-Off Throttle & Built-In Regulator / High Performance Motor / 5,000 Strokes Per Minute / Rear Exhaust / Built-In Silencer / Light Weight, Slim Design / Safety Throttle Speed Lever / 16 Gauge Metal Capacity / 90 PSI Max. Pressure / 1 Year Warranty



VT7500 Reciprocating Saw & File (One tool for both sawing and filing)

**Shears** In-Line / Cuts Sheet Steel Up to 18 Gauge / Removes 1/4" Strip of Material / 1/2 HP



VBSP18 Pistol Grip Blade Shear

**Nibblers** Access Cap / Speed Regulator / Ball Bearing Construction / Cuts Tight 3/8" Radius / 18 Gauge Metal Capacity / 90 PSI Max. Pressure / 1 Year Warranty



VT7000 Nibbler

Model	Type	RPM	CFM	Stroke	Noise	Air Inlet	Min. Hose	Vibration	Length	Weight
VT7500	Reciprocating	5,000	4	3/8"	90 dB	1/4 NPT	3/8"	45 M/S2	9.8"	2.8 Lbs.
VT7501	Reciprocating	9,000	6.5	3/8"	95 dB	1/4 NPT	3/8"	51 M/S2	9.5"	1.75 Lbs.
VT7000	Nibbler	2,900	7	-	90 dB	1/4 NPT	3/8"	5.9 M/S2	7"	2.2


## SPECIALTY TOOLS

**Punch / Flange** Unique 2-in-1 Metal-working Tool / Head Swivels 360° / Insulated Handle / Comfortable Level Throttle / Crimps Up to 14 Gauge (.075") Sheet Steel or Punches Clean Holes (3/16") for Welding Applications / Muffled Handle Exhaust / 90 PSI Max. Pressure



VT8510 Punch / Flange Tool

**Windshield Knife** Adjustable Oscillation / 2-1/8" Offset Blade / Rear Exhaust with Built-In Silencer / Well Balanced / Easy Blade Replacement / 90 PSI Max. Pressure

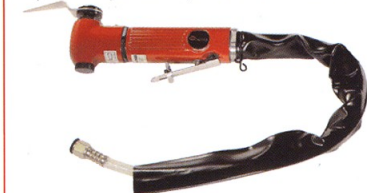

VT8520 Windshield Knife

Model	RPM	CFM	Noise	Air Inlet	Min. Hose	Vibration	Length	Weight	Warranty
VT8510	-	2.9	80 dB	1/4 NPT	3/8" I.D.	<2.5 M/S2	9-1/4"	4.6 Lbs.	1 yr.
VT8520	20,000	7	90 dB	1/4 NPT	3/8" I.D.	.9 M/S2	9.7"	3 Lbs.	1 yr.

### VT9800 Electronic Ear Muffs

Volume control permits adjustment from maximum amplification to total shut off, with variation from active communication to passive hearing protection.

**Key Features:**

- Active Volume Hearing Function
- LED Power Indicator
- Allows user to listen to surroundings
- Boosts weak sounds
- Attenuates loud, harmful noise over 85db
- Improves working environment for the user
- Allows normal communication with headset on
- Requires 2 AA batteries (not included)



### VT855 Air Hose Reel

This versatile all-steel unit mounts anywhere, and is easily installed. It features a spring tension brake to control rotation, and holds 100 feet of 5/8" hose or 50 feet of 1" hose.

- Includes 50' 3/8" Air Hose



For customer service or product information, Contact us at 800.253.9726, service@shindustries.com, www.shindustries.com or Fax at 216.831.9573.

©2013 S&H Industries, 5200 Richmond Road, Cleveland, Ohio 44146