


AIR HOSES & REELS

AIR HOSE REELS

- Heavy gauge steel construction for years of reliable service in the toughest conditions.
- Mounting holes allow for direct mounting to bench top, ceiling or wall.



M635

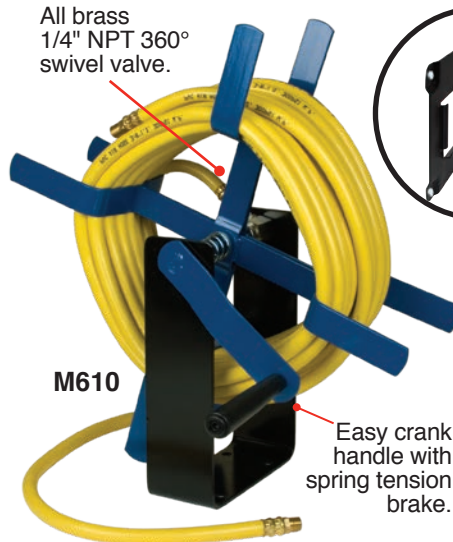

M610



Quick-release wall-mount plate makes it easy to remove reel for remote use.




M672

| Item # | IP | MP | PKG | Reel Capacity | Inlet NPT | Outlet NPT | Hose ID | Hose Length | PSI Work | PSI Burst | W | D | H |
|--------|----|----|-----|---------------|-----------|------------|---------|-------------|----------|-----------|---------|--------|-----------|
| M610* | 1 | 1 | CBX | 100' | 1/4" (M) | 1/4" (M) | 3/8" | 50' | 250 | 500 | 10-5/8" | 14" | 12-11/16" |
| M672* | 1 | 1 | CBX | 50' | 1/4" (F) | 1/4" (M) | 3/8" | 50' | 300 | 600 | 10-1/2" | 9-3/4" | 13-1/8" |
| M635* | 1 | 1 | CBX | 50' | 3/8" (F) | 1/4" (F) | | Reel only | | | 10-3/8" | 9-3/8" | 10-7/8" |

AUTO REWIND HOSE REEL

- Heavy duty steel construction with corrosion resistant powder coated finish.
- Four-way roller guides, adjustable guide arm and rubber stop.
- Permanently lubricated all brass main shaft.
- Mounts to floor, wall, ceiling or truck bed

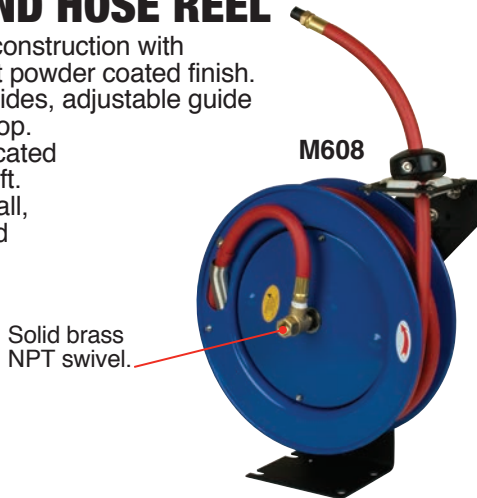

M608



M655

| Item # | IP | MP | PKG | Inlet NPT | Outlet NPT | Hose ID | Hose Length | PSI Work | PSI Burst | W | D | H |
|--------|----|----|-----|-----------|------------|---------|-------------|----------|-----------|---------|---------|-----------|
| M608* | 1 | 1 | CBX | 3/8" (F) | 3/8" (M) | 3/8" | 25' | 300 | 750 | 14" | 10-5/8" | 12-11/16" |
| M619* | 1 | 1 | CBX | 3/8" (F) | 3/8" (M) | 3/8" | 50' | 300 | 750 | 16-3/4" | 7-1/2" | 17-3/4" |
| M655* | 1 | 1 | CBX | 1/4" (F) | 1/4" (M) | 3/8" | 65' | 300 | 600 | 16-1/2" | 6-3/8" | 18-1/2" |

RED RUBBER AIR HOSE

- Red rubber air hose with polyester yarn reinforcement is used for a wide range of commercial and industrial applications.
- Features a class C oil, solvent, weather and abrasion resistant outer coating tough conditions.
- Remains flexible from -20 to +165 degrees Fahrenheit (-29 to 74 C).



Bend restrictors at each end for long life.

| Item # | IP | MP | PKG | Inlet NPT | Outlet NPT | Hose ID | Hose Length | PSI Work | PSI Burst |
|--------|----|----|-----|-----------|------------|---------|-------------|----------|-----------|
| M606* | 1 | 12 | LAB | 1/4" (M) | 1/4" | 25' | 300 | 800 | |

BLK: Bulk | CAS: Storage Case | CBX: Color Box | CRD: Carded | CLM: Clamshell | DBL: Double Blister
LAB: Color Label | RAC: Storage Rack | SHK: Shrink Wrap | SLV: Sleeve | TAB: Hang Tab | WBX: White Box