
Systems for Wall-Hung Toilets, Pre-Wall, 2x6 Installation

Geberit Duofix Carrier, Omega 2x6 Installation

Model No.	Description	List Price
111.012.00.1	Carrier frame with 1.6/0.8 GPF Omega Concealed Tank, pre-wall installations	\$557.00
111.018.00.1	Carrier frame with 1.28/0.8 GPF Omega Concealed Tank, pre-wall installations	\$557.00




NOTES:

- 1. Concealed tank shipped dual-flush ready
- 2. Carrier for 2-hole washdown style wall-hung toilet fixtures only
- Refer to → geberit.us for latest list of code approved compatible toilet fixtures, including certified WaterSense® combinations

Note: For System Accessories see pages 16-18.

Dual-Flush Actuators, Omega 2x6 Installation



Dual-Flush Buttons for Concealed Installations, Omega 2x6 Installation

Style	Material	Finish	Model No.	List Price
Type 01	Plastic	Alpine White	116.042.11.1	\$119.00
(Polished Chrome	116.042.21.1	154.00
<u></u>		Alpine White &	116.044.11.1	119.00
Type 10	Plastic	Matte Chr-Polished Chr**	116.055.KH.1	170.00
(Polished Chrome-White**	116.055.KJ.1	154.00
Type 70	Metal	Brushed Stainless Steel &	115.084.FW.1	782.00
	Glass	White Glass 🖶	115.084.SI.1	664.00
		Black Glass 🕭	115.084.SJ.1	664.00
		Umber Glass 🖶	115.084.SQ.1	664.00
Rectangle	Plastic	Polished Chrome-Matte Chrome**	115.932.KA.1	154.00
	Metal	Brushed Chrome	115.932.GH.1	243.00
	Plastic	Polished Chrome &	115.934.21.1	154.00

Dual-Flush Buttons for Furniture Installations, Omega 2x6 Installation

Type 01	Plastic	Alpine White	116.050.11.1	\$119.00
(Polished Chrome	116.050.21.1	154.00
•		Matte Chrome	116.050.46.1	154.00
Type 10	Plastic	Matte Chr-Polished Chr**	116.057.KH.1	170.00
O		Polished Chrome-White**	116.057.KJ.1	154.00
$lue{lue}$				

Single-Flush Buttons for Concealed Installations, Omega 2x6 Installation

Type 01‡	Plastic	Alpine White	116.040.11.1	\$101.00
(Polished Chrome	116.040.21.1	119.00

Cover Plates for Omega Concealed Tank Pre-wall, 2x6 Installation for use with Flush Buttons

.0. 400	************	on Buttono		
	Glass	White	115.082.SI.1	\$164.00
	Metal	Customizable	115.082.00.1	205.00

Surface Even Cover Plates for Omega Concealed Tank, 2x6 Installation, for use with Flush Buttons

Plastic	Customizable + rough-in kit†	115.087.00.1	\$205.00
	Customizable with frame + rough-in kit [†]	115.088.00.1	258.00
	Note: Includes required accessory kit		

Finishes follow this pattern = Plate-Ring-Button

^{**} Finishes follow this pattern = Frame-Button

^{***} Finishes follow this pattern = Frame-Button Edge Trim-Button

[†] Note: For tile, stone or other hard surfaced walls only!

[‡] Not intended to be sold in California

Geberit Duofix Carrier 111.012.00.1 and 111.018.00.1, Omega 2x6 Installation

ltem	Model No.	Description	List Price
1	240.269.00.1	Angle stop valve to concealed tank (blue handle)	
1.1	240.298.00.1	Spindle to angle stop valve	13.00
1.2	241.857.00.1	Counter nut, plastic	4.00
1.3	240.347.00.1	Handle for angle stop valve (blue)	4.00
2	240.629.00.1	Reinforced braided hose for Geberit Kappa and Omega Concealed Tank	21.00
2.1	240.922.00.1	Seal kit for braided hose, EPDM O-ring	9.00
3	243.088.00.1	Mounting bracket for filling valve	6.00
4	241.469.00.1	Fill valve Type 380	26.00
4.1	240.771.00.1	Seal kit for filling valve Type 380	11.00
5	243.090.00.1	Protection plate	59.00
6	243.091.00.1	Support block	18.00
7	243.092.00.1	Mud guard protection housing	27.00
8	243.093.00.1	Insertion plate	8.00
9A	243.728.00.1	1.28/0.8 GPF dual-flush valve for Omega Concealed Tank	32.00
9B	243.095.00.1	1.6/0.8 GPF dual-flush valve for Omega Concealed Tank	32.00


9.2	816.418.00.1	Flat gasket for flush valve	2.00
10	243.096.00.1	Valve seat basket and noise bushing for flush valve	11.00
10.1	243.139.00.1	Throttle for basket	7.00
10.2	241.868.00.1	U-cup seal for valve basket after 2008	2.00
11	362.771.00.1	Seal for concealed flush pipe, EPDM	\$2.00
12	362.796.92.1	Protection plug, plastic	5.00
13	242.012.00.1	Outlet pipe bracket (complete)	4.00
14	152.404.46.1	Connector set with mounting hardware (bowl installation kit), HDPE; Alpine White cover caps	42.00
14.1	217.713.46.1	Cover caps with leveling washer, plastic, Matte Chrome	7.00
14.2	119.668.00.1	Seal for supply inlet tube, EPDM	2.00
14.3	152.424.00.1	Seal for toilet outlet connector, EPDM	3.00
15	242.314.00.1	Materials for Concealed Carrier and Tank installation	40.00
16	366.061.16.1	HDPE waste fitting outlet bend, 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet	22.00
16.1	387.282.00.1	Seal for outlet bends, EPDM	5.00
17	366.820.92.1	Protection plug, plastic	4.00
18	240.189.00.1	Threaded rod for wall-mounted toilet or bidet installation	4.00
19	242.886.00.1	Conduit pipe for shower toilet water supply with Sigma Concealed Tank 2x6, Omega Concealed	10.00

Description

Handle set to flush valve

List Price

9.00

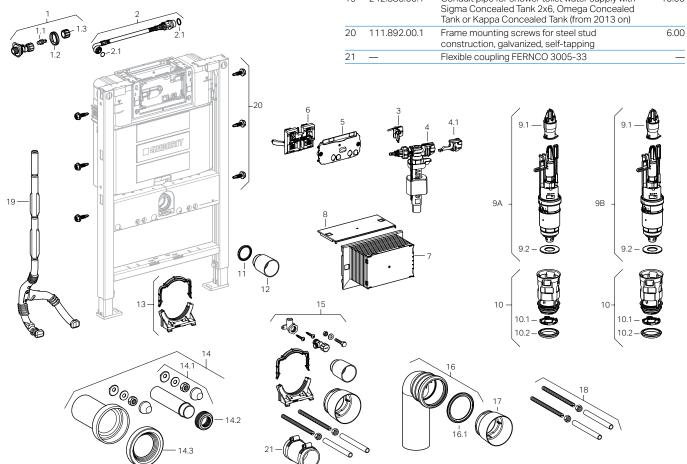

Item Model No.

241.167.00.1

9.1

System Accessories

Geberit Optional and Required Accessories for Installation



111.335 111.798 111.012

Description		Model Number	List Price		111.597			111.524	111.490	111.625	109.304
OPTIONAL Conn	ection Sets and Accessories for Fi	nished Walls	up to 3.5" (9cm) Th	ick						
	Connector set with mounting hardware (bowl installation kit), HDPE; Alpine White cover caps	152.404.11.1	\$42.00	✓	✓	√					
	PE syphon trap with horizontal outlet and seal; Ø1.96" (Ø50 mm) outlet	152.950.11.1	35.00							✓	
	PE syphon trap with vertical outlet and seal; Ø1.97" (Ø50 mm) outlet	152.951.11.1	35.00							✓	
0,000	Acoustic insulation set for wall-hung toilets and bidets	156.050.00.1	18.00	✓	√	√	✓	✓			
O OO	Cover caps with leveling washer, plastic, Alpine White	217.713.11.1	7.00	√	✓	\checkmark	√	✓	√		
	HDPE connection set with 1" (2.5 cm) offset and mounting hardware (bowl installation kit); with socket for Ø3.50" (Ø90 mm) push fit piping and Ø55 supply inlet; Matte Chrome cover caps	405.116.00.1	218.00	✓	✓	√					✓
REQUIRED Conn	ection Sets and Accessories for Fi	nished Walls	3.5" - 7.0" (9-18cm)	Thick						
00000000000000000000000000000000000000	HDPE Connector set for extended installation and mounting hardware (bowl installation kit), with socket for Ø3.50" (Ø90 mm) push fit piping and Ø2.16" (Ø55 mm) supply inlet; Matte Chrome cover caps	152.438.46.1	54.00	✓	√	√					✓
444	Extension set for actuator plates for Sigma Concealed Tanks 2x6 and 2x4, Kappa and Omega Concealed Tanks	240.938.00.1	22.00	✓	✓	√					✓
	Mud guard protection housing for Sigma Concealed Tanks 2x6 and 2x4, plastic, 4 inch (10 cm)	241.826.00.1	13.00	✓	√						✓
	Mud guard protection housing and extension set for urinal carrier	241.930.00.1	19.00							✓	
	Mounting rod M12 x 10" long. Not supplied.	M12 x 10"	_	✓	✓	✓	✓	✓			
	Mounting rod M10 x 10" long. Not supplied.	M10 x 10"	_						✓		
	Mounting rod M8 x 10" long. Not supplied.	M8 x 10"								✓	

Geberit Optional and Required Accessories for Installation



111.335 111.798 111.012

			111.555 111.756 111.012
Description	Model Number	Liet Drice	111 002 111 507 111 019 111 520 111 524 111 400 111 625 100 304

Description		Model Number	List Price		111.597		111.520	111.524	111.490	111.625	109.304
OPTIONAL Instal	lation Accessories for Bidet Seats	;									
	Water supply hose for bidet seat for Kappa and Omega Concealed Tank pre-wall. For adding bidet seat to an installed carrier. For complete installation, must order with 249.801.00.1.	240.839.00.1	\$57.00			√					
	Water supply hose for bidet seat for 111.597.00.1 and 111.798.00.1 carrier with Sigma Concealed Tank 2x4. For adding bidet seat to an installed carrier. For complete installation, must order with 249.801.00.1.	243.173.00.1	46.00		✓						
	Water supply hose for bidet seat add-on after finished installation of Sigma 2x6 and 2x4, Kappa and Omega Concealed Tanks.	249.801.00.1	111.00	✓	✓	✓					✓
OPTIONAL Instal	ation Accessories for Geberit Du	ofix Carrier Fr	ames								
Up, Fr.	Frame to wall anchoring for 5.125"- 7.875" (13-20 cm) thick unfinished pre-wall	111.013.00.1	22.00		✓						
	Frame to wall anchoring for 5.125"- 7.875" (13-20 cm) thick unfinished pre-wall	111.815.00.1	34.00	✓		✓	✓	✓	✓	✓	
	Frame to wall anchoring for 5.125"- 7.875" (13-20 cm) thick unfinished pre-wall corner installations	111.835.00.1	34.00	✓	✓	\checkmark	✓	✓	✓	✓	
	Support brackets for wall-hung toilets with small contact surface (thin profiles)	111.847.00.1	44.00	✓		\checkmark					
	Fire protection set for Sigma Concealed Tank 90 min. fire resistance to DIN EN 1364-1:1999-10	111.863.00.1	490.00	✓							
	Frame to wall anchoring where foot installations into floor are not allowed for 5.125"-7.875" (13-20 cm)	111.867.00.1	65.00	✓	✓	✓	✓	✓	√	✓	
	Fastening set for sinks with 14.9"-22.8" (38-58 cm) mounting centers	111.868.00.1	111.00						✓		
	Frame to stud fastening set for extended stud spacing from 19.75"-25.56" (50-65 cm)	111.869.00.1	34.00	√	✓	✓	✓	✓	✓	✓	
	Frame to wall anchoring extensions for 7.875"-15.75" (20-40 cm) thick (unfinished pre-wall)	111.887.00.1	14.00	√	✓	√	✓	✓	✓	✓	
	Crossbar for inlet 1/2" thread	242.042.00.1	69.00							✓	
©©	Elbow supply fitting set, Gun Metal (until Q3 2017)	465.034.00.1	37.00				✓	✓	√		

System Accessories

Geberit Optional and Required Accessories for Installation



111.335 111.798 111.012

Description Model Number List Price 111.902 111.597 111.018 111.520 111.524 111.490 111.625 109.304

Description		Model Number	List Price	111.902	111.597	111.018	111.520	111.524	111.490	111.625	109.304
OPTIONAL Instal	lation Waste Fitting Accessories										
	PP connector set with bend for floor-mount toilets with mounting hardware, 1 x 90° bends with socket for Ø4.375" (Ø110 mm) push fit piping for Ø3.82"–4.21" (Ø97–107 mm) male connection and expansion to Ø4.375" (Ø110 mm) outlet	152.647.00.1	\$111.00								(For A or B discharge. See below)
	HDPE waste fitting outlet bend, $1 \times 90^{\circ}$ bend with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet	366.061.16.1	22.00								(For A discharge. See below)
	HDPE straight connector with socket for Ø3.50" (Ø90 mm) push fit piping and Ø3.50" (Ø90 mm) outlet x 12" (31 cm) long	366.887.16.1	34.00	√	✓	✓					(For A discharge. See below)
	HDPE connector with offset for LH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls only.	366.913.16.1	71.00	✓	✓	✓					(For A discharge. See below)
	HDPE connector with offset for RH horizontal drain connections (as viewed from sitting position), 1 x 90° bend with socket for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and Ø3.50" (Ø90 mm) outlet for 5.5" (13.97 cm) minimum walls only.	366.914.16.1	71.00	✓	✓	✓					(For A discharge. See below)
	Cast iron outlet bend; $1 \times 90^{\circ}$ bend with socket for Ø3.50" (Ø90 mm) push fit piping and 3" CIP outlet	367.071.18.1	147.00	✓	✓	✓					(For A discharge. See below)
	HDPE "Back-to-back" connector for horizontal drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping, with 45° offset and expansion to Ø4.375" (Ø110 mm) outlet for 10.75" (27.31 cm) minimum walls only.	367.485.16.1	147.00	✓	✓	✓					(For A or B discharge. See below)
	HDPE "Back-to-back" connector for vertical drain connections; 2 x 90° bends with sockets for Ø3.50" (Ø90 mm) push fit piping and expansion to Ø4.375" (Ø110 mm) outlet for 10.75" (27.31 cm) minimum walls only.	367.923.16.1	147.00	✓	✓	✓					(For A or B discharge See below)

Note: Any of these fittings in combination with carrier 111.798.00.1 are cUPC and IPC listed.

Waste Fitting Discharge Configurations for Floor Mount Back Outlet Toilets

Note: Mounting collar/clamp by installer



A. Floor-Mount Rear Discharge into Wall



B. Floor-Mount Rear Discharge into Floor