

Red Rubber Full Face Gasket

Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
Tag	_____ PO# _____

Specifications

Jones Stephens Red Rubber Full Face Gaskets are 1/16" thick and have a temperature rating of 350°F.

Do Not Use These Gaskets In High Chlorate or Chlorine Environments



Chlorate refers only to chlorine in the +5 oxidation state, or chlorate ion. The chlorate ion is a byproduct of the disinfection process used to treat drinking water. It is formed when sodium hypochlorite or chlorine dioxide are used in the treatment process. SBR is not recommended for environments with elevated levels of chlorates or chlorines. Chlorine chemically attacks SBR very aggressively. This can create a potential leak path.

Materials

Red Rubber, SBR

Dimensions and Product Offering

PART NO.	SIZE	# OF HOLES	A	B	C	D
G51001	1.00"	4	1.31"	4.25"	3.12"	0.62"
G51013	1.25"	4	1.66"	4.62"	3.50"	0.62"
G51015	1.50"	4	1.91"	5.00"	3.87"	0.62"
G51002	2.00"	4	2.37"	6.00"	4.75"	0.75"
G51025	2.50"	4	2.87"	7.00"	5.50"	0.75"
G51003	3.00"	4	3.50"	7.50"	6.00"	0.75"
G51035	3.50"	8	4.00"	8.50"	7.00"	0.75"
G51004	4.00"	8	4.50"	9.00"	7.50"	0.75"
G51005	5.00"	8	5.56"	10.00"	8.50"	0.87"
G51006	6.00"	8	6.62"	11.00"	9.50"	0.87"
G51008	8.00"	8	8.62"	13.50"	11.75"	0.87"
G51010	10.00"	12	10.75"	16.00"	14.25"	1.00"
G51012	12.00"	12	12.75"	19.00"	17.00"	1.00"

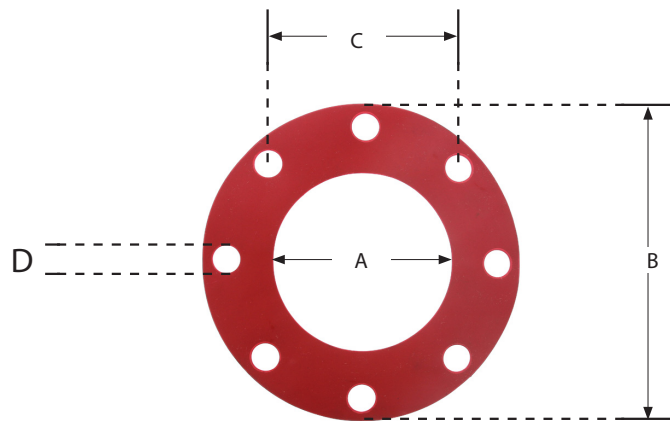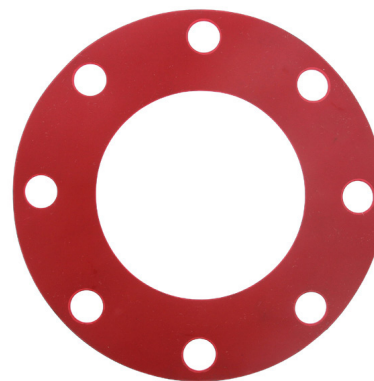

Certifications/Listings/Approvals

ASTM D1330