


F SERIES


W3-1797S

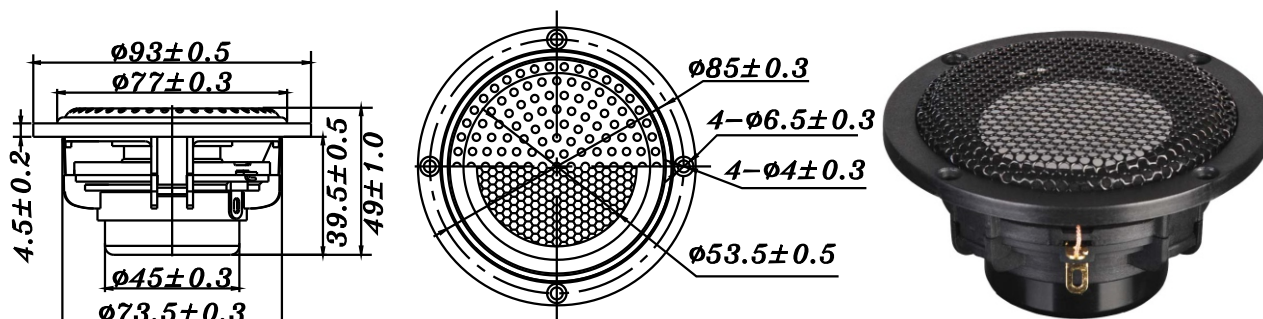

- FULL RANGE FREQUENCY DESIGN
- VERY WIDE DISPERSION PERFORMANCE
- FLAT ALUMINUM SANDWICH CONE
- NEODYMIUM MAGNET SYSTEM
- VERY LOW 2nd AND 3rd DISTORTION
- IT'S GOOD FOR FULL RANGE OR MID-RANGE APPLICATION

3" SANDWICH FULL RANGE / MIDRANGE

DIAPHRAGM MTL	Sandwich
SURROUND MTL	Foam Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.6 Ω
SENSITIVITY 1W/1M	85 dB
FREQUENCY RESPONSE	90-20K Hz
FREE AIR RESONANCE	90 Hz
VOICE COIL DIAMETER	32 mm
AIR GAP HEIGHT	8 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	4.72 TM
TYPE OF MAGNET	Neodymium
MOVING MASS	4.04 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	848.98 μMN^{-1}
EFFECTIVE PISTON AREA	0.0032 M ²
Levc	0.015 mH
Zo	18 Ω
Xmax	1 mm
Vas	1.23 Litr
Qts	0.29
Qms	1.54
Qes	0.35

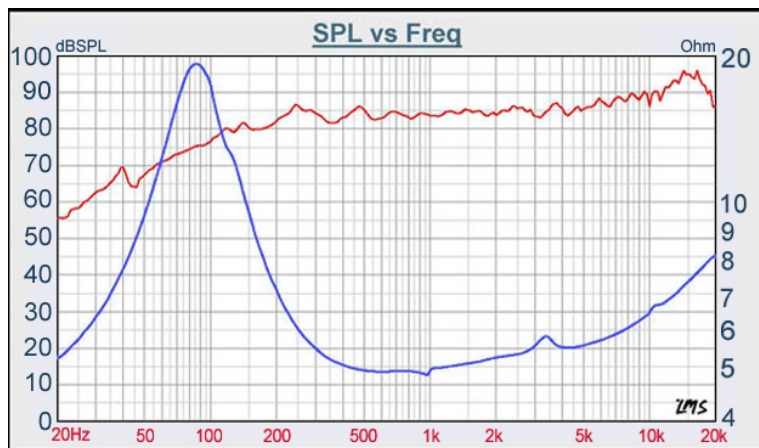

VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com