




RT1.0-8
HI-RES NEO RIBBON
TWEETER 8 OHM


MECHANICAL DRAWING

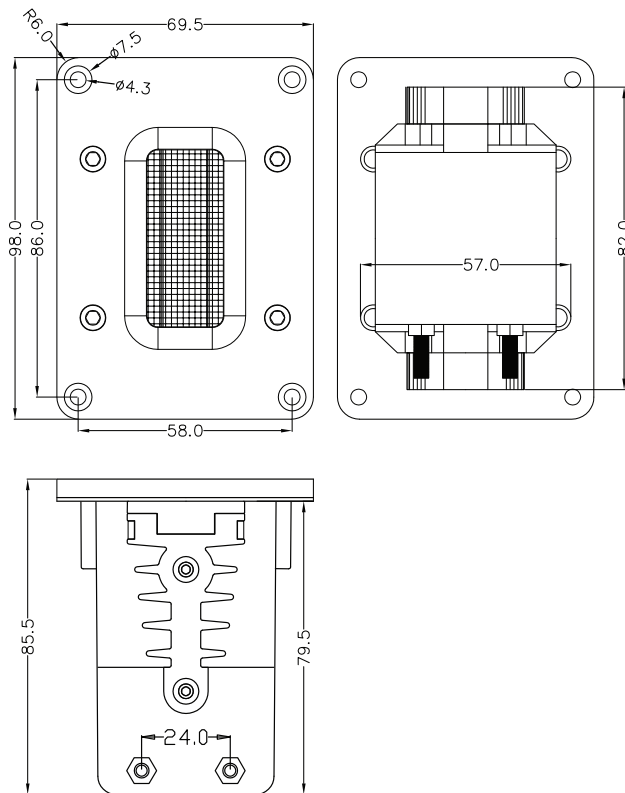

FEATURES

- 2.5kHz to 40kHz frequency response for true Hi-Res detail
- Powerful neodymium magnets deliver high efficiency and incredible dynamics
- Remarkably thin ribbon diaphragm provides accurate transient detail
- High sensitivity for increased SPL Output
- Built-in grill protects the delicate ribbon from fingers and other foreign objects

IMPEDANCE/PHASE

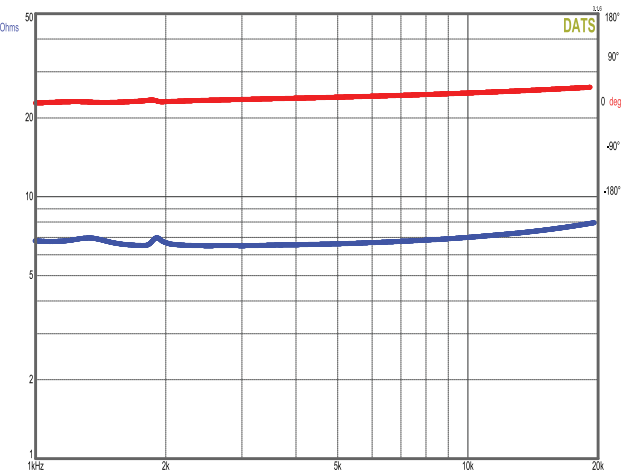

PARAMETERS

| | |
|-----------------------------|-----------------------|
| Impedance | 8 ohms |
| Re | 0.2 ohms |
| Le | N/A |
| Fs | N/A |
| Qms | N/A |
| Qes | N/A |
| Qts | N/A |
| Mms | N/A |
| Cms | N/A |
| Sd | N/A |
| Vd | N/A |
| BL | N/A |
| Vas | N/A |
| Xmax | N/A |
| VC Diameter | N/A |
| SPL | 93 dB @ 2.83V/1m |
| RMS Power Handling | 15 watts/30 watts max |
| Usable Frequency Range (Hz) | 2,500 Hz - 40,000 Hz |

FREQUENCY RESPONSE

