

Parameters


Impedance (Ω)	8
Re (Ω)	6.76
Le (mH) @ 1 kHz	0.36
Fs (Hz)	695
Qms	1.67
Qes	11.9
Qts	1.46
Mms (g)	0.11
Cms (mm/N)	0.47
Sd (cm ²)	3.5
Vd (cm ³)	0.04
BL (Tm)	0.53
VAS (liters)	0.008
XMAX (mm)	0.1
VC Diameter (mm)	12.5
SPL (dB 1W/1m)	76
RMS Power Handling (w)	1.0
Usable Frequency Range (Hz)	500-20,000

Features

- Lightweight treated fabric diaphragm
- Extended frequency range
- Neodymium magnet structure
- Injection-molded nonmetallic frame
- Suitable for low power applications
- 8 ohm impedance compatible with most amplifiers

Note: All dimensions in mm.

Frequency Response

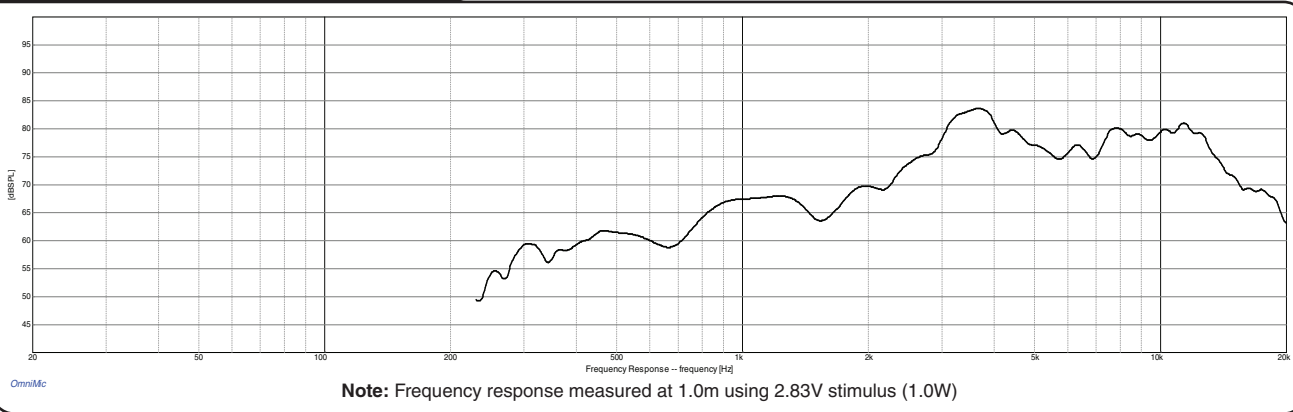

Impedance/Phase

